


MISHIMOTO

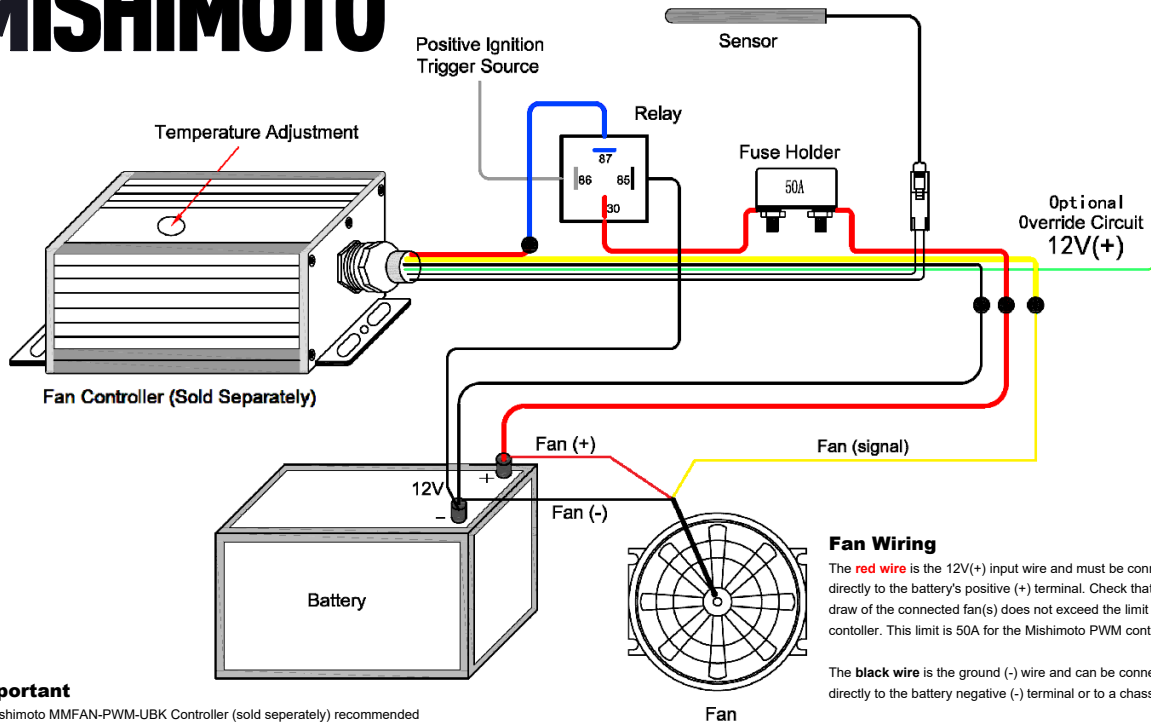

Important

1. Mishimoto MMFAN-PWM-UBK Controller (sold separately) recommended
2. Follow wiring instructions included with fan instead of those included with MMFAN-PWM-UBK
3. Max fan amperage: 11A

Fan Wiring

The **red wire** is the 12V(+) input wire and must be connected directly to the battery's positive (+) terminal. Check that the amp draw of the connected fan(s) does not exceed the limit of your fan controller. This limit is 50A for the Mishimoto PWM controller.

The **black wire** is the ground (-) wire and can be connected either directly to the battery negative (-) terminal or to a chassis ground.

The **yellow wire** is the signal input, this wire should be connected to the PWM controller's signal wire.