



B&W Trailer Hitches
1216 Hawaii Rd / PO Box 186
Humboldt, KS 66748
P:800.248.6564
F:620.869.9031

Companion RV Cover Installation Instructions

Call or Email us for Installation Support hitches@turnoverball.com bwtrailerhitches.com

Model RVXA3114

For use with B&W Companion hitch (RVB3300, RVB3305, RVB3710 and RVB3715)

INSTALL RV COVER

1. **RV Cover position.** The RV cover will install so the B&W logo is towards the rear of the truck and the handle is through the slot on the side of the cover, see Figure A1. Note, use of the cover on a moving vehicle requires the coupler handle to be installed.
2. **Place the cover over the RV** Start by passing the coupler handle out through the slot in the cover. Next pull each corner of the cover down past the bottom edge of the Companion.
3. **Inspect cover.** The cover is held in place by the elastic band imbedded in the bottom rim of the cover. Before using the cover in a moving vehicle, inspect the cover and ensure the bottom rim of the cover is completely under the bottom edge of the Companion base, see Figure A2.

OPERATION AND MAINTENANCE

1. **Before using cover.** Check the cover for wear and tear. This includes inspecting the bottom rim of the cover for damage or loss of elastic strength.
2. **During use.** Periodically check that the cover is correctly placed over the RV and has not moved, Adjust if necessary.
3. **Cover Care.** Periodically clean and inspect the cover. Use mild soap and water with a clean soft cloth to gently wipe away grime from the cover. Using stiff brushes, abrasives, or strong chemicals may damage the finish of the cover.

! WARNING: Small tears or rips may grow larger while cover is in transit. Damage to the cover may allow it to separate from the hitch. Do not use cover in a moving vehicle if there are rips or tears in the cover. Failure to check for damage may cause serious injury or property damage.

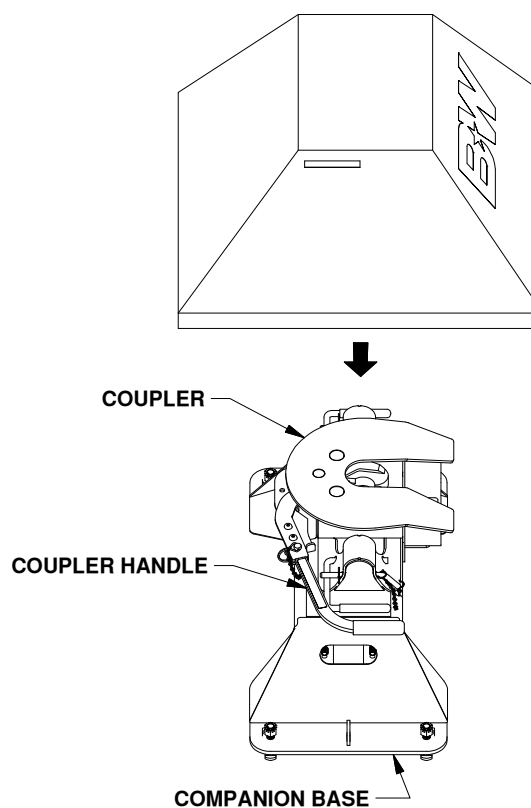


Figure A1. Cover orientation.

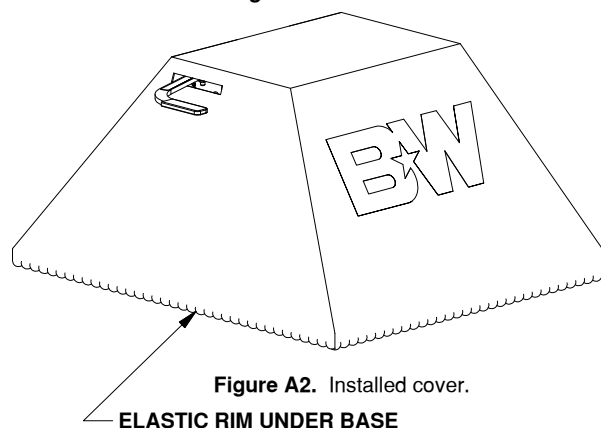


Figure A2. Installed cover.