


Installation Instructions Highback Front Seat Covers

Vehicle Application

•Jeep TJ Wrangler 2003 – 2006

Part Number: 29228

www.bestop.com - We're here to help! Visit our web site and click on "Ask a Question"



TOOLS



WARNING DO NOT remove the seats from the vehicle to install this product.

WARNING
This product is designed primarily to enhance the appearance of the vehicle and to shield the occupants from ordinary weather conditions. Do not rely in any way on the components of this product to contain occupants within the vehicle, or to protect against injury or death in the event of an accident. This product will not protect the occupants from falling objects. Never operate the vehicle in excess of manufacturer's specifications.

WEAR SEAT BELTS AT ALL TIMES

Read and follow, precisely, all installation instructions provided when installing product. Failure to do so may result in a poor fit and could place occupants of the vehicle in a potentially dangerous situation.

Seat Installation Instructions

Parts List

Seat Cover - Driver Qty - 1 Seat Cover - Passenger Qty - 1

1 Slide Seat Cover Over Back of Seat

Orient the Seat Covers on the seats. The quilting should face the front and the openings in the cover should line up with the "Fold and Tumble Lever" and the "Seat Recliner Lever".


With the quilting toward the front, slip the upper seat cover over the seat back. Pull the cover down to the seat bottom and smooth the fabric over the head rest. Carefully slip the opening for the "Fold and Tumble Lever" over the lever.





Tuck the Center Flap Between the Seat Back and the Seat Bottom


Locate the flap sewn to the inside of the cover and tuck it between the seat back and the seat bottom. If necessary, lift up on the bottom of the seat back to make it easier to slip the flap through.




3 Secure the Bottom of the Seat Cover

Slide the cover over the seat bottom. Make sure that the "Seat Recliner Lever" is clear and operates freely. Fold the seat back forward.

Wrap the fabric flap around the back of the seat bottom and fasten the snap and the hook and loop at the rear corner of the seat.



A Secure the Center Flap to the Seat Bottom

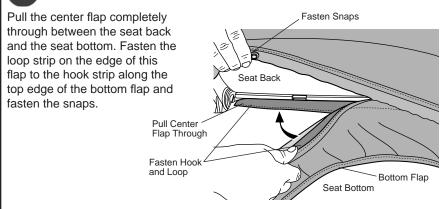


Rev. A 1005

Seat Installation Instructions



Fasten Seat Belt Opening

Fasten the snap at the opening behind the seat belt buckle.



Limited Warranty

We warrant our product to be free from defects in material and workmanship, for the terms specified below, provided there has been normal use and proper maintenance. This warranty applies to the original purchaser only. All remedies under this warranty are limited to the repair or replacement of any item or items found by the factory to be defective within the time period specified.

If you have a warranty claim, first you must call our factory at the number below for instructions. You must retain proof of purchase and submit a copy with any items returned for warranty work. Upon completion of warranty work, if any, we will return the repaired or replaced item or items to you freight prepaid. Damage to our products caused by accidents, fire, vandalism, negligence, misinstallation, misuse, Acts of God, or by defective parts not manufactured by us, is not covered under this warranty.

THE WARRANTY TIME PERIOD IS AS FOLLOWS: ALL "SOFT GOODS" MANUFACTURED BY OUR COMPANY (USING PRIMARILY VINYLS, PLASTICS, AND/OR FOAM): ONE YEAR FROM DATE OF PURCHASE.

ANY IMPLIED WARRANTIES OF MERCHANTABILITY AND/OR FITNESS FOR A PARTICULAR PURPOSE CREATED HEREBY ARE LIMITED IN DURATION TO THE SAME DURATION AND SCOPE AS THE EXPRESS WRITTEN WARRANTY. OUR COMPANY SHALL NOT BE LIABLE FOR ANY INCIDENTAL OR CONSEQUENTIAL DAMAGE.

Some states do not allow limitations on how long an implied warranty lasts, or the exclusion or limitation of incidental or consequential damages, so the above limitations or exclusions may not apply to you.

This warranty gives you specific legal rights, and you may also have other rights which vary from state to state.



For further information or request for warranty work, please contact: Bestop Inc. Customer Service

(800) 845-3567 (303) 465-1755

Rev. A 1005