



BX88436

Mud Flap Wall Mount

Installation Instructions

Serial Number



Mud Flap Wall Mount
Mounts on center to standard 16" wall studs.
Max holding weight capacity of 70 lbs.

Please read these Installation Instructions in their entirety prior to installing or operating this equipment.

BX88436
Mud Flap Wall Mount
Installation Instructions

Important

The Mud Flap Wall Mount must be secured into the wood-framed wall studs with the provided fasteners. The use of drywall anchors or other fasteners are not acceptable and could be potential safety hazard. The Mud Flap Wall Mount is designed only for wood framed walls and should not be used on metal-framed walls. Please follow instructions carefully to ensure proper installation.

Mount the Mud Flap Wall Mount on an area 8-feet wide by three-feet high to accommodate the Mud Flap System when stored. Additionally, prior to beginning the installation process, clear your work area of any objects that could pose a safety hazard.


Prop 65

⚠ WARNING: This product can expose you to chemicals including acrylonitrile, which is known to the state of California to cause cancer, birth defects, or reproductive harm. For more information go to www.P65Warning.ca.gov.

Inch-Pound (in-lbs)	Foot Pounds (ft-lbs)	Newton-Meters (N-m)	Kilogram-Centimeters (kgf-cm)
20	1.7	2.3	23
30	2.5	3.4	34
70	5.87	7.9	79
80	6.7	9.0	90
180	15	20	203
1500	125	169	1690

BX88436
Mud Flap Wall Mount
Installation Instructions

Tools Required
Measuring Tape
Level
Stud Finder
Pencil or Chalk
Drill
3/16" Drill Bit

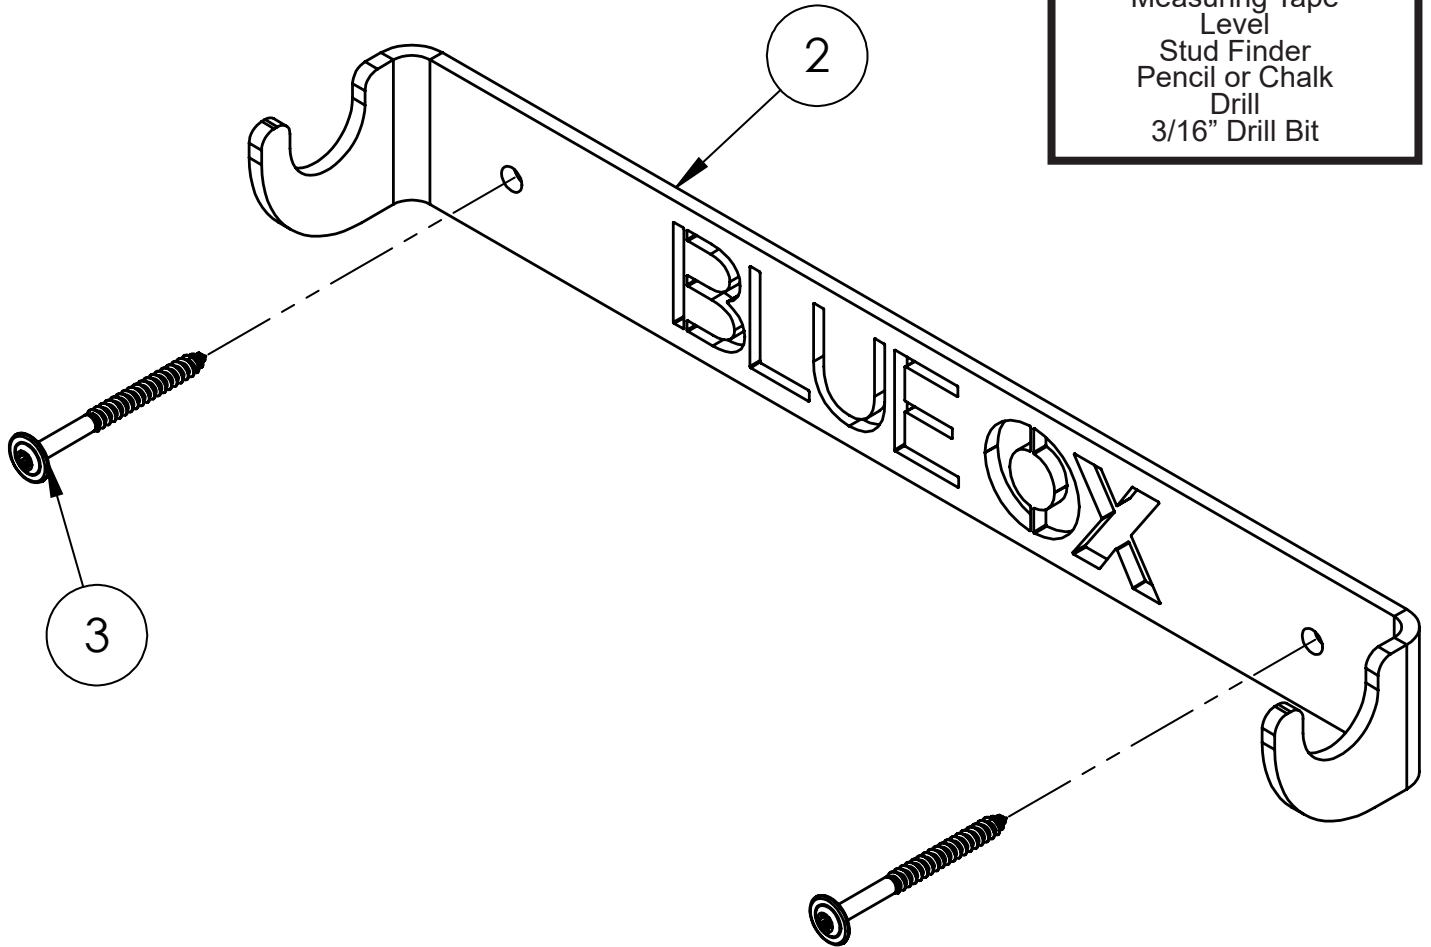

Item No.	Part No.	Description	Qty.
1.....	63-4965(not shown)	Bolt Bag	1
2.....	101-10748	Wall Mount Plate	1
3.....	201-1124	5/16" x 3-1/2" Spax Power Lag, ZP.....	2
4.....	229-1154(not shown)	T40 x 2" Torx Power Bit.....	1

Important:

Use only genuine factory replacement parts on your hitch. Do NOT substitute homemade or non-typical parts. If a bolt is lost or in need of replacement, for your safety and the preservation of your hitch, be sure to use a replacement bolt of the same grade. Replacement parts may be ordered through Blue Ox®. Failing to follow and/or altering these installation instructions in either installation or required equipment will void the manufacturer's warranty.

BX88436
Mud Flap Wall Mount
Installation Instructions

Installation Instructions:

NOTE: Mud Flap Wall Mount is designed to be used with the Mud Flap System.

1. After locating the wall space where you will install the Mud Flap Wall Mount, measure three feet up from the ground and make a mark on the wall. Using a level, draw a straight line across the wall (approximately 36 inches); this line will be used as a reference point for installing the Wall Mount Plate.
2. Once the reference line has been drawn, locate the studs in the wall and mark each stud that intersects the reference line drawn. These marks must line up with the pre-drilled holes in the Wall Mount Plate.
3. Align the bottom edge of the Wall Mount Plate on the horizontal reference line drawn in step 1. Verify that the pre-drilled holes in the plate line up with the wall studs.
4. Pre-drill the two (2) holes in the wall studs using a 3/16" drill bit.
5. Use the two (2) of the provided fasteners to secure the Wall Mount Plate to the wall studs with the aid of the provided T40 Torx Bit.
6. Check to ensure that both fasteners are completely tightened into the wall studs.

NOTE: The hitch needs to be removed from the Mud Flap System before it is hung on the Wall Mount for storage.

BX88436
Mud Flap Wall Mount
Installation Instructions

Mud Flap Systems

BX88420	Mud Flap System, 2" Hitch
BX88421	Mud Flap System, 2-1/2" Hitch

Mud Flap System Accessory Kits

BX88429	Kit, Mud Flap Exhaust Outlet 2 Pack
BX88430	Kit, Mud Flap Rock Screen
BX88431	Kit, Mud Flap Heat Shield
BX88435	Kit, Mud Flap 3" Center Hub
BX88437	Kit, Mud Flap Trim Plates

CUSTOMER SERVICE COMMITMENT

Blue Ox® is committed to providing you with exceptional customer care throughout your lifetime with our products. Our team is here to assist you with any questions you may have regarding the performance of your product. Simply call (402) 385-3051 and you can speak with our technical service team.

Additionally, please visit our website to see which rallies our team will be attending. For a nominal fee, our service technician will service your towing system to ensure it's in proper working condition. Also, as a commitment to our customers, should you visit our factory, you can stay at our full service Blue Ox® campground at no charge along with enjoying a factory tour.

Again, thank you for being our customer and for the confidence you have shown in the performance of our products. It is because of customers like you we enjoy the success we have today.

© 2022 Blue Ox
One Mill Road, Industrial Park
Pender, Nebraska 68047
Phone: (402) 385-3051
Fax: (402) 385-3360
www.blueox.com