


DU-HA[®] All-Terrain

70821 - DU-HA All-Terrain for Bobcat and Ranger UTV - Full Size Box

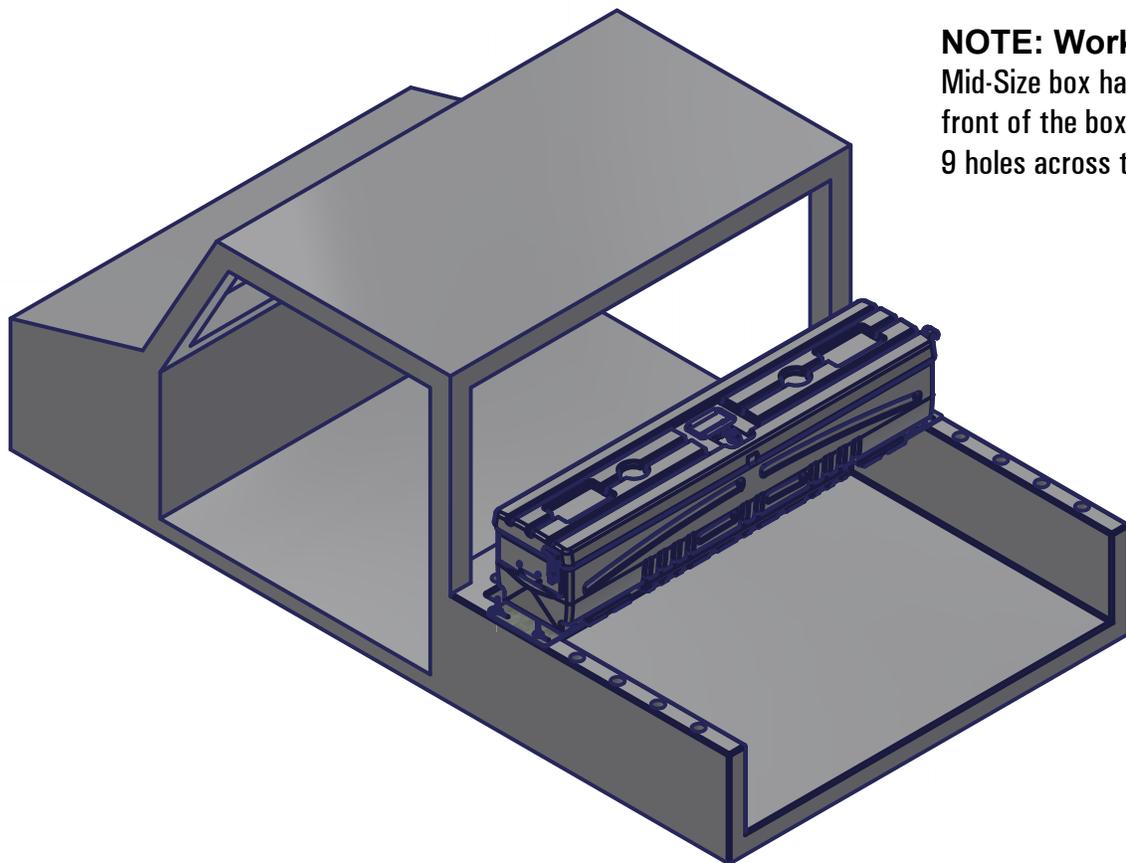

NOTE: Works on full-size box only. Mid-Size box has 7 holes across the front of the box and the Full-Size box has 9 holes across the front of the box.



STEP 1 - Attach Handle to Lid

Place Handle (4) over holes in Lid Top. Insert two Bolts #10 x 1.5" (7) through Flat Washer - #10 (9), Handle (4), and All-Terrain Lid. Secure with Flat Sealing Washer (has a rubber backing) - #10 (10) and Lock Nut #10 (11) Use 1/8" Hex Key Wrench.

Note: Handle may already be installed.

STEP 2 - Attach Rubber T-Handles

Place Rubber T-Handle (5) over inserts in Base. Insert two Bolts #10-32 x 1.0" (8) through T-Handle (5) and use 1/8" Hex Key Wrench to tighten into the inserts, on each end, T-Handle should point outward when in the up position. Next install the Rubber T-Handle Keeper (6) on the lid, make sure the alignment knob on the back of the T-Handle Keeper lines up with the recess in the lid and secure in place with one Bolt #10-32 x 1.0" (8) by inserting through the T-Handle Keeper (6) and thread into the insert in the lid, on each end.

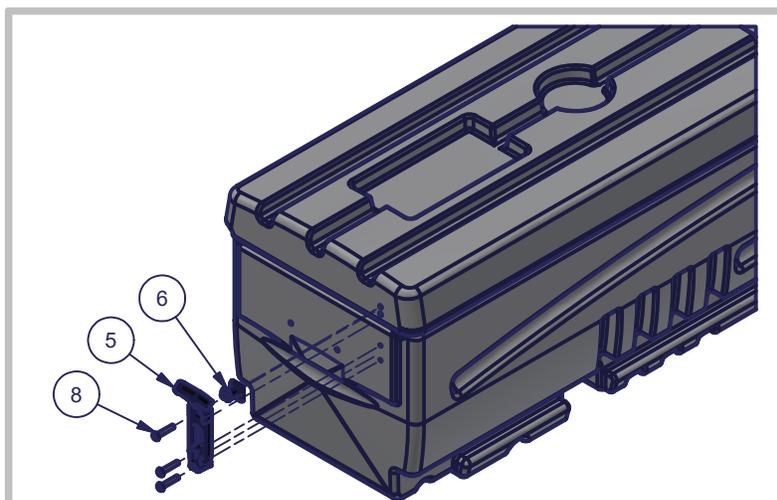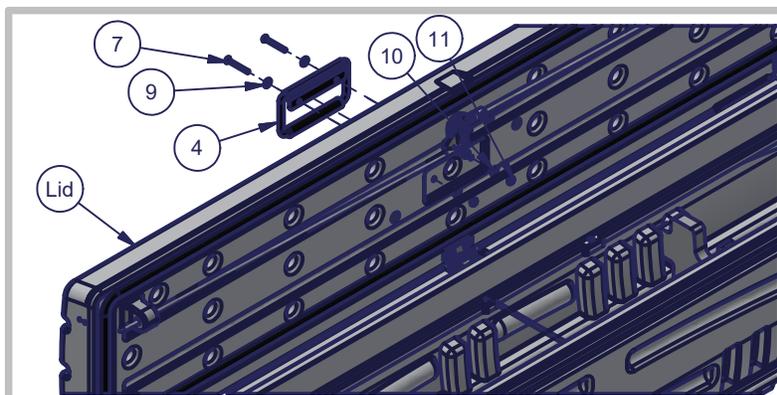


DU-HA All-Terrain

70821 - DU-HA All-Terrain for Bobcat and Ranger UTV - Full Size Box

Step 3: Attach Plates to Box

Attach the Ranger XP 22 Plates (3) to the bottom of the All-Terrain Storage Box (2) using 1/4-20 x 5/8" bolts (16), 1/4" washers (17) and 1/4" lock washers (18), as shown. Next measure the width of your UTV box (1) and adjust your mounting plates (3) to 1/4" shorter than that distance and tighten hardware. Make sure to orientate the mounting plates (3) with the larger slots facing outward, as shown in Detail C.

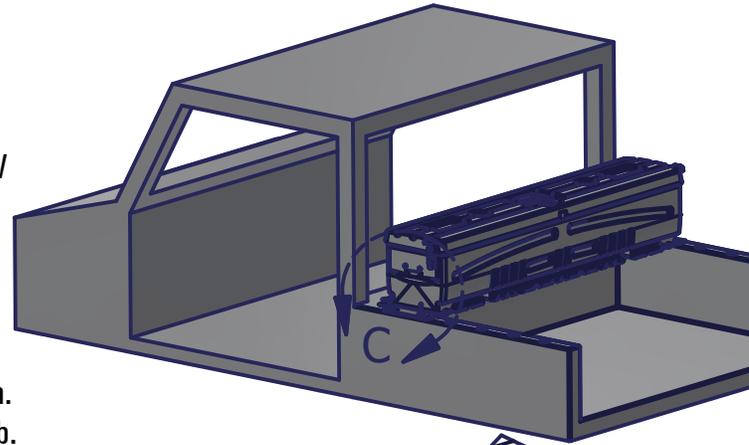

Step 4: Set Box on UTV

Set the All-Terrain Box (2) onto the UTV Box (1) in your desired position. Make sure you have enough room to open the lid without hitting the cab.

Step 5: Secure Box to UTV



Secure the All-Terrain Box (2) to the UTV Box (1) using the J-Bolts (12), 12 x 1.0 fender washers (13) and 1/4" Nylock Nuts (14). Slide the 12 x 1.0 fender washer (13) onto the J-Bolt (12) then thread the 1/4" Nylock Nuts (14) onto the J-Bolt (12) about 1/2". Insert the end of the J-Bolt (12) into the slot of the Ranger XP 22 Plate (3) and hook on the bottom of the round hole in the UTV Box (1), hook J-Bolt towards the outside of the hole. **Note:** The front hole has some webbing in the bottom so you will need to turn the end of the J-bolt hook just right in order to slide it in to get it to hook. Once hooked lift up on the 12 x 1.0 fender washer (13) while tightening the 1/4" Nylock Nut (14), tighten securely.

Slide End Caps (15) onto ends of J-Bolts (12).


Note: There is an optional lock available to lock the Storage box onto the box of the UTV.

Call for details.

DETAIL C
SCALE 1 / 8

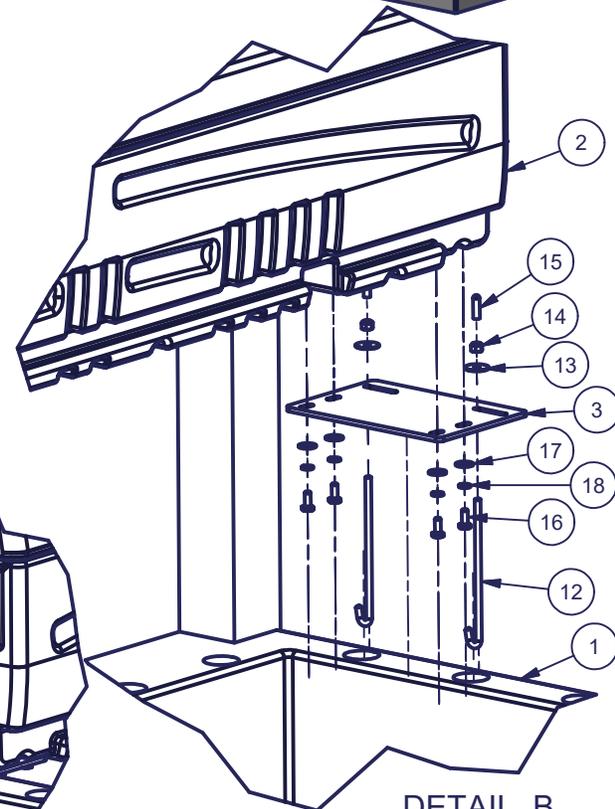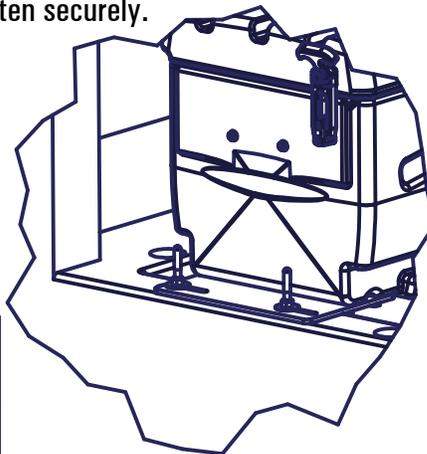

DETAIL B
SCALE 1 / 8

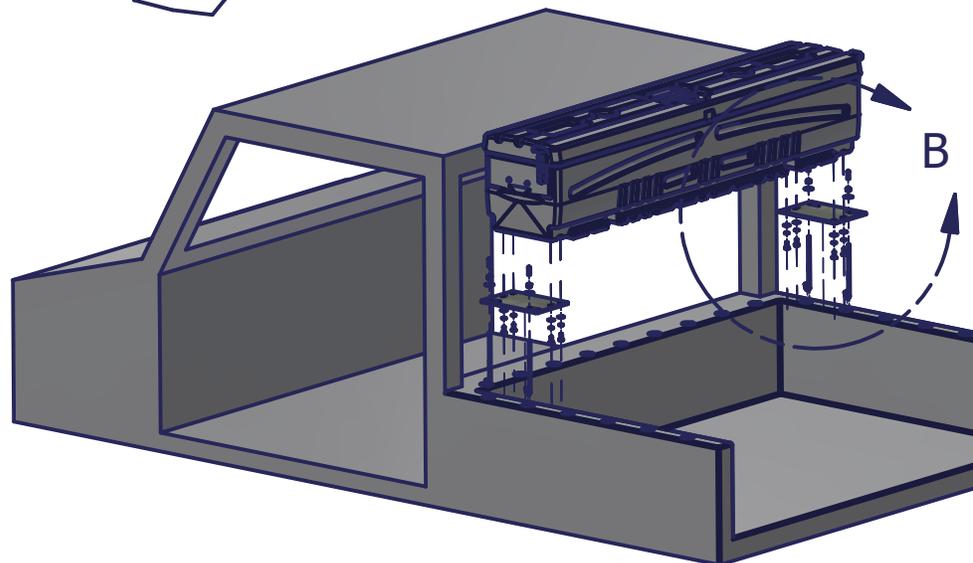

Parts List

ITEM	QTY	PART NUMBER	DESCRIPTION
1	1	--	Ranger Full Size Box
2	1	70820	All-Terrain Storage Box (sold separately)
3	2	1001265	Ranger XP 22 Plate
4	1	1001044	Handle - 90 Degree Metal
5	2	1001235	Latch - Rubber T-Handle
6	2	1001235	Latch - Rubber T-Handle Keeper
7	2	1001006	Screw #10-24 x 1.50"
8	6	1001260	Screw #10-32 x 1"
9	2	1001143	Washer - Flat #10 x 1/2 OD
10	2	1001244	Washer - Bond Seal #10
11	2	1001144	Nut Nylock #10-24
12	4	1001263	J-Bolt 1/4-20 x 6.50
13	4	1001126	Washer Fender 12 x 1.0
14	4	1001122	Nut Nylock 1/4-20
15	4	1001338	End Cap Round - .240 ID x 1.0 - Black
16	8	1001009	Hex Bolt 1/4-20 x 5/8"
17	8	1001155	Washer Flat 1/4
18	8	1001010	Washer Lock 1/4"

DU-HA All-Terrain

Step 6: Foam Organizer / Gun Holders


Place each Foam Organizer / Gun Holder assembly (3) into the channel slots in the side walls of the ALL-TERRAIN Box (2). They can be positioned in 3 locations on each end or in the center of the ALL-TERRAIN Box. To install rotate horizontally above slot and rotate downward and slide into slot. Stock of gun should rest in large groove; barrel should rest in small groove.

Step 7: Center Brace

To maximize strength and stability, use the Center Brace (5). Insert each end into the holes on the top lip of the ALL-TERRAIN Box (2) at the middle. To access cargo, lift front side of Center Brace out of the hole and rotate the Center Brace out of the way to the right and insert into storage hole on back side of ALL-TERRAIN Box (2). Return Center Brace to front hole when finished.

Step 8: Closing and Locking the ALL-TERRAIN BOX

To close the Humpstor shut the lid and secure end T-Handles (7) by grabbing the top of the rubber handle and pull up and secure onto the Rubber T-Handle keeper (6) on each end. Next on top of the lid (1) turn the Wing Knob 1/4 Turn Latch (4) counter clockwise to engage locking mechanism. To lock Humpstor, use the provided key. Insert key with teeth facing away from you into Wing Knob 1/4 Turn Latch (4) and turn counter clockwise to lock and clockwise to un-lock.

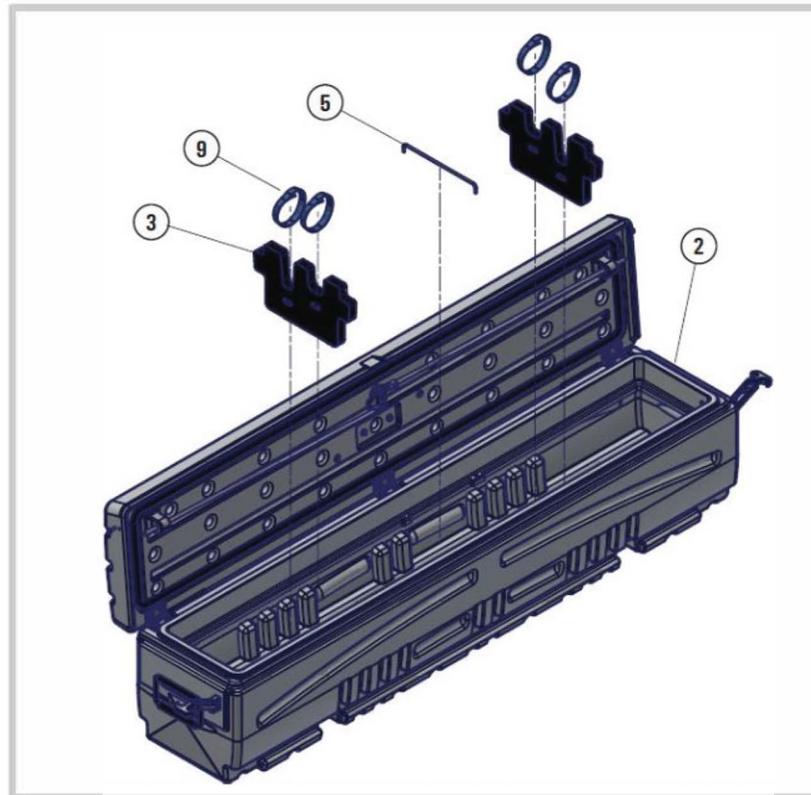

Parts List

ITEM	QTY	PART NUMBER	DESCRIPTION
1	1	70820	All-Terrain Storage Box Lid
2	1	70820	All-Terrain Main Body
3	1	Divider 70800 Assm	Divider Pkg Assm - Humpstor 2022
4	1	1001232	Wing Knob 1/4 Turn Latch
5	1	1001239	Center Wire Brace
6	2	1001235	Latch - Rubber T-Handle - Keeper
7	2	1001235	Latch - Rubber T-Handle
8	6	1001260	Screw BHSCS #10-32 x 1" SS

Safety Instructions:

Warning: 75 LBS CAPACITY – DO NOT EXCEED 75 POUNDS OF CARGO IN THE ALL-TERRAIN BOX. CAUTION – Do not store explosives or hazardous materials in the ALL-TERRAIN BOX.

Do not place loaded guns in the ALL-TERRAIN BOX.

For further instructions refer to the vehicle owners manual or contact DU-HA, Inc.

