



Performance Oil Catch Can Kit

Part Number: 860-031

**2023-2026 Acura Integra 1.5L Turbo
2022-2024 Honda Civic 1.5L Turbo
2022-2026 Honda Civic Si 1.5L Turbo**

Installation Instructions

For technical inquiries please email us at tech@hpsperformance.com

In the email, please include the following information for faster response:

- Year / Make / Model / Engine of your vehicle
- If it is a fitment issue, please include pictures showing the fitment problem
- If there are missing parts, please list the part number(s) from the bill of materials on the 2nd page
- Optional but recommended – Your contact phone number and preferred call back time

You can also give us a call via 626-747-9200 for tech support Monday-Friday, 9:00am-5:00pm Pacific Time.

Bill of Materials

Kit Number: 860-031

Line #	Description	Part Number	Qty
1	Oil Catch Can	OCC-14	1
2	Oil Catch Can Bracket	OCC-BRKT-037	1
3	Bracket	530-891	1
4	Straight Aluminum Adapter, AN-6 to M16 x 1.50	AN816-6-M1615	2
5	Push-On Aluminum Hose End, AN-6, Straight	150-0006	2
6	Bolt, M5 x 0.8, 10mm Long	HW-B5-10	3
7	Bolt, M6 x 1.0, 16mm Long	HW-B6-16	1
8	Flat Washer, M6, 12mm OD	HW-FW6S	1
9	Fuel Injection Clamp, 15mm-17mm	FIC-15	2
10	Zip Tie	CLIP-ZIPTIE-1	1
11	150 Series Push-On Hose, AN-6	150-06	9.5 inches
12	150 Series Push-On Hose, AN-6	150-06	12.5 inches

- **Before installing any parts of this oil catch can kit, please read the instructions thoroughly.**
- **Verify the contents of this oil catch can kit before disassembling your vehicle.**
- **Report any defective or missing parts to HPS directly. The HPS dealer you purchased this product from might not have the replacement parts you need.**
- **Installation requires moderate mechanical skills. A qualified mechanic is highly recommended.**
- **Do not attempt to install the oil catch can kit while the engine is hot.**
- **This installation may require the removal of coolant lines that may be hot.**
- **For technical inquiries, please email us at tech@hpsperformance.com**

PLEASE READ CAREFULLY BEFORE INSTALLATION!


This installation is not for the novice customer. Install this product with EXTREME caution! Misuse of this product can destroy your engine! If you are not mechanically inclined, please have a professional automotive mechanic install this kit.


NOTE: HPS holds no responsibility for any engine damage that results from misuse of this product.

GETTING STARTED


1. Turn the ignition OFF and disconnect the vehicle's negative battery cable. If the engine has run within the past two hours let it cool down.

NOTE: Disconnecting the negative battery cable erases pre-programmed electronic memories. Write down all memory settings before disconnecting the negative battery cable. Some radios will require an anti-theft code to be entered after the battery is reconnected. The anti-theft code is typically supplied with your owner's manual. In the event your vehicle's anti-theft code cannot be recovered, contact an authorized dealership to obtain your vehicle's anti-theft code. We also highly recommend NOT discarding any stock parts after the installation.

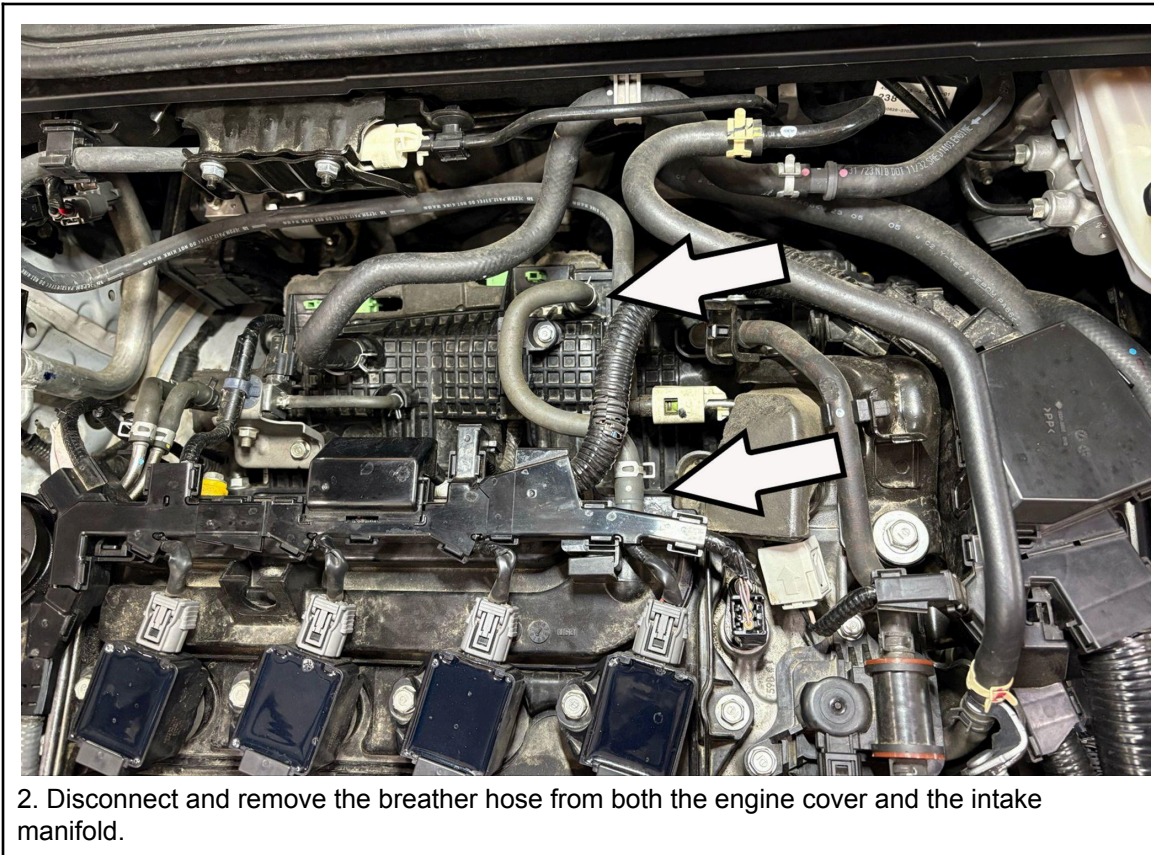


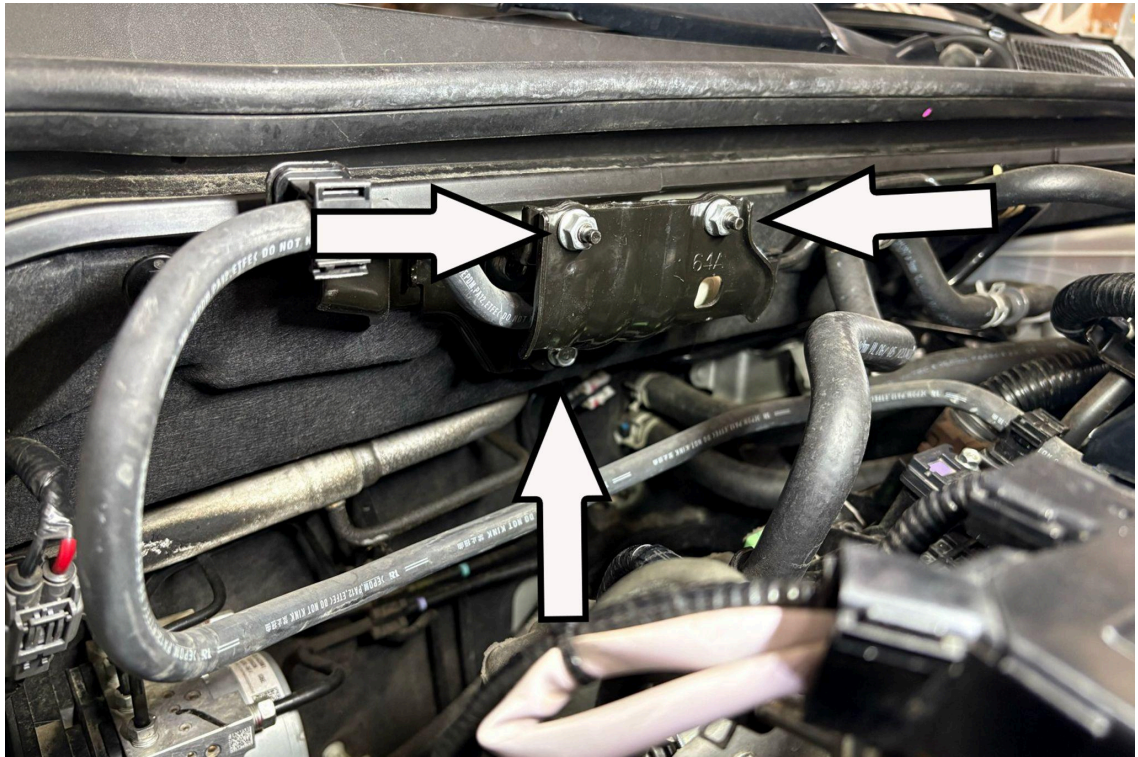


3. Remove the fuel line cover by taking off the two nuts and one bolt.

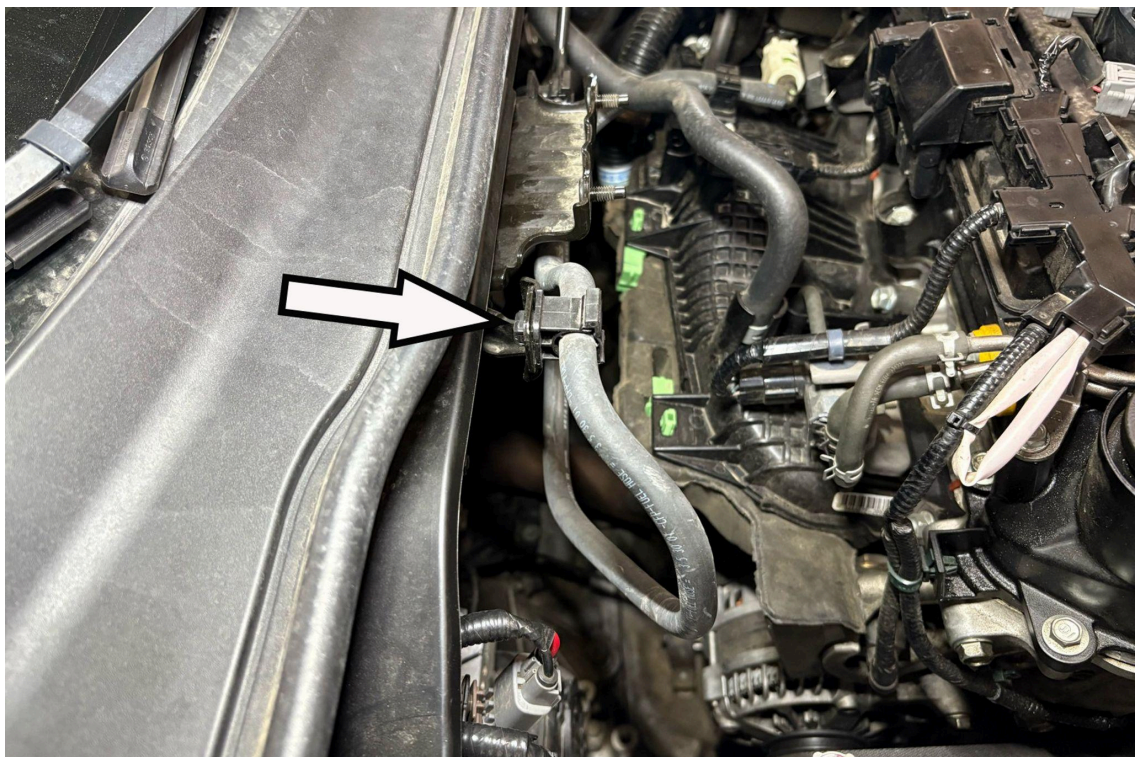

4. Disconnect the fuel line retaining clip from the mounting bracket.

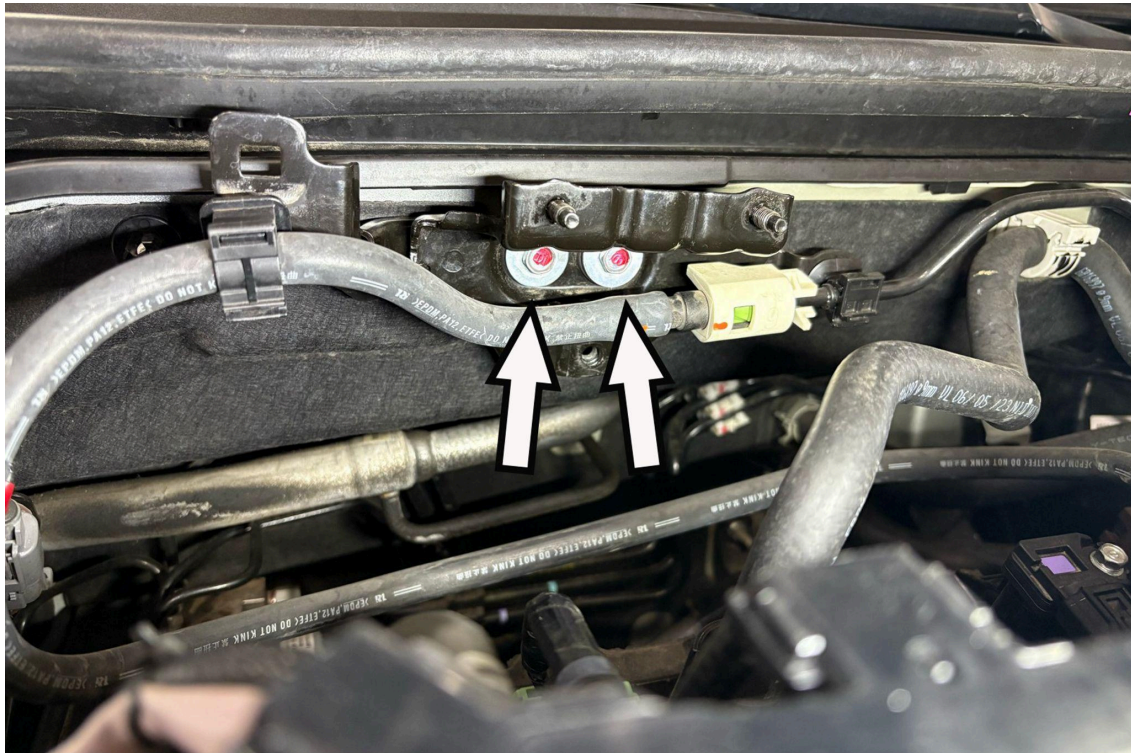

5. Remove the two bolts holding the fuel line bracket to the firewall using a 10mm socket.

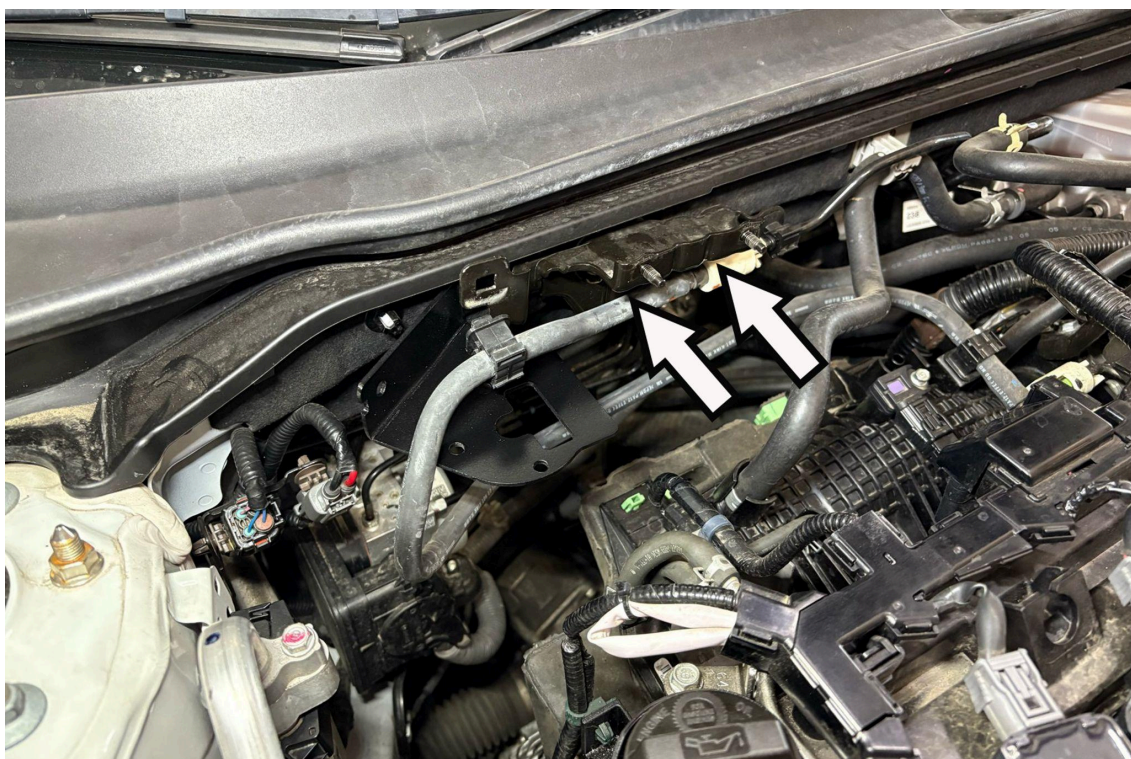


6. Install the HPS oil catch can bracket behind the fuel line bracket and secure it using the factory hardware.



7. Reinstall the fuel line bracket cover using the factory nuts and bolt, then reattach the fuel line retaining clip back onto the bracket.




8. Install the provided flat bracket onto the HPS oil catch can bracket using the provided M6x16 mm bolt and washer. Then, secure the fuel line to the bracket using the provided push-in zip tie. Cut off the excess from the provided push-in zip tie.

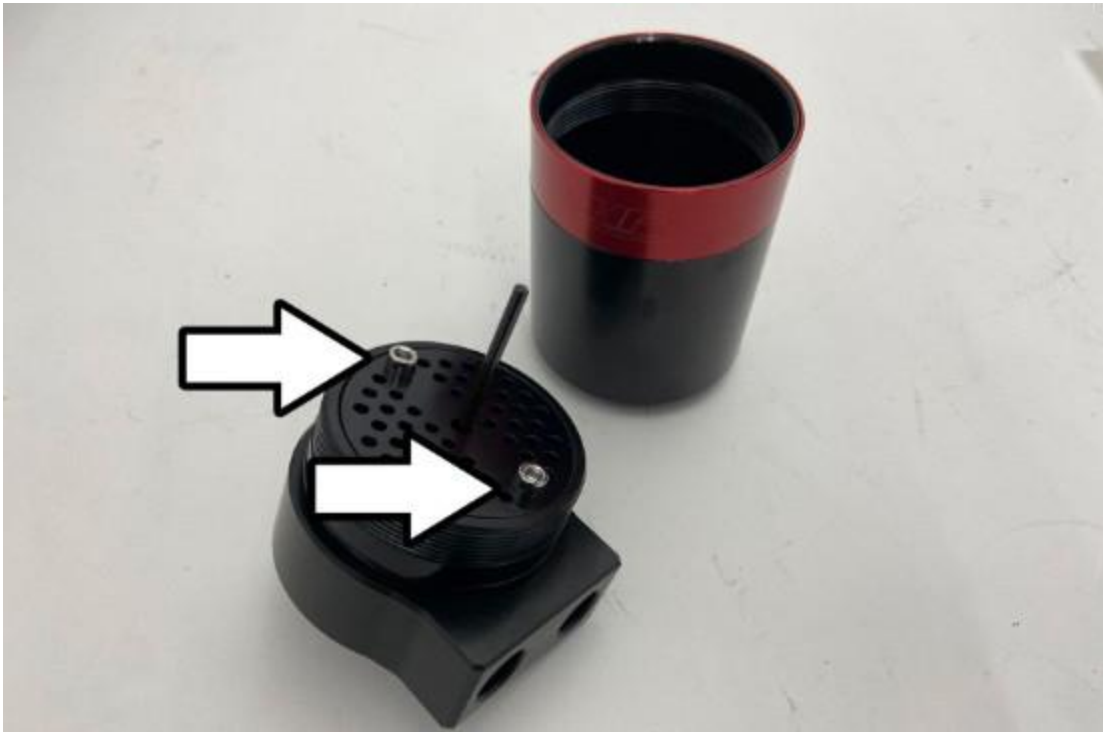

9. Unscrew the top of the HPS Oil Catch Can and check that the Allen bolts are tight.




10. Secure the two provided M16 adapter fittings and washers onto the oil catch can.

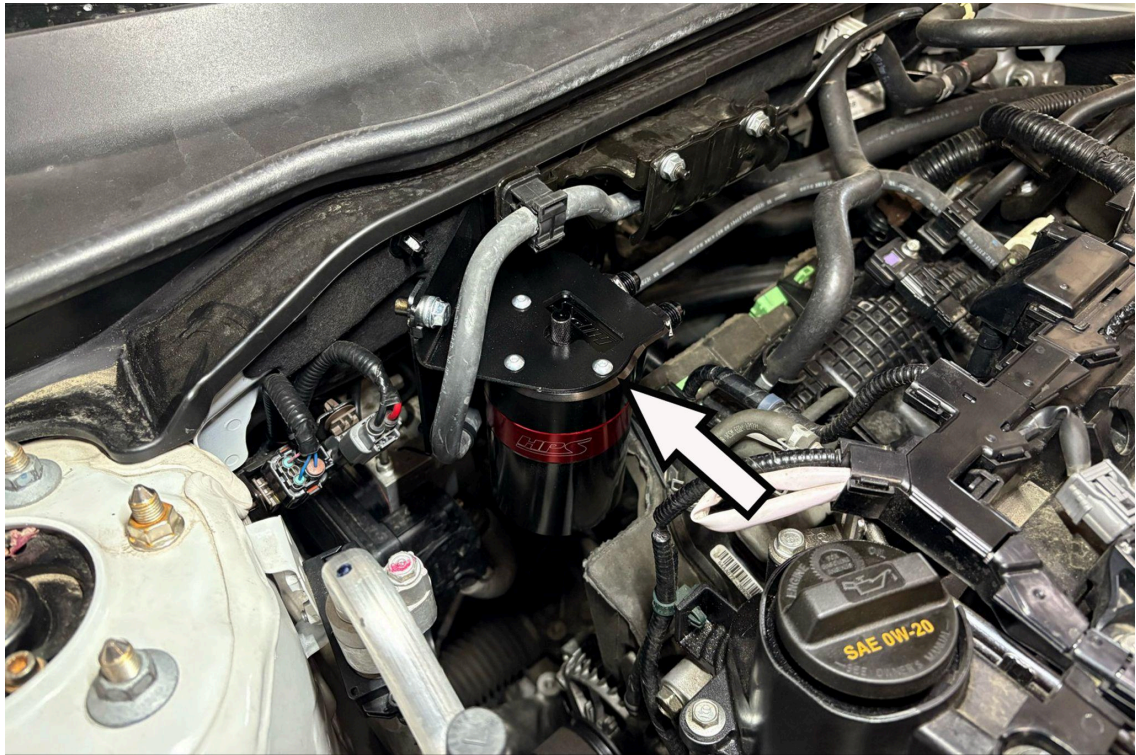


11. Secure the HPS oil catch can onto the bracket using the provided M5x10mm bolts.




12. Attach the shorter hose to the supplied -6 AN hose end fitting. Loosely fit a provided FIC clamp onto the other end.

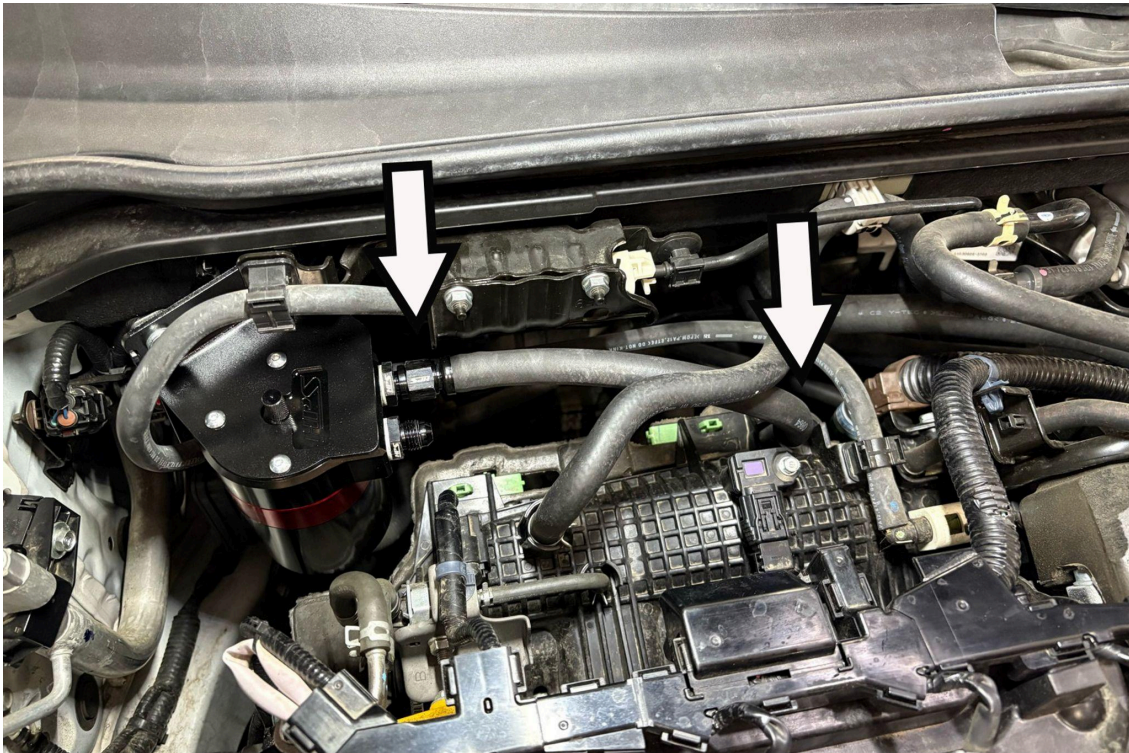

13. Connect and secure the hose to the breather port on the intake manifold using the clamp and fasten the -6 AN hose end fitting to the rear port of the oil catch can.

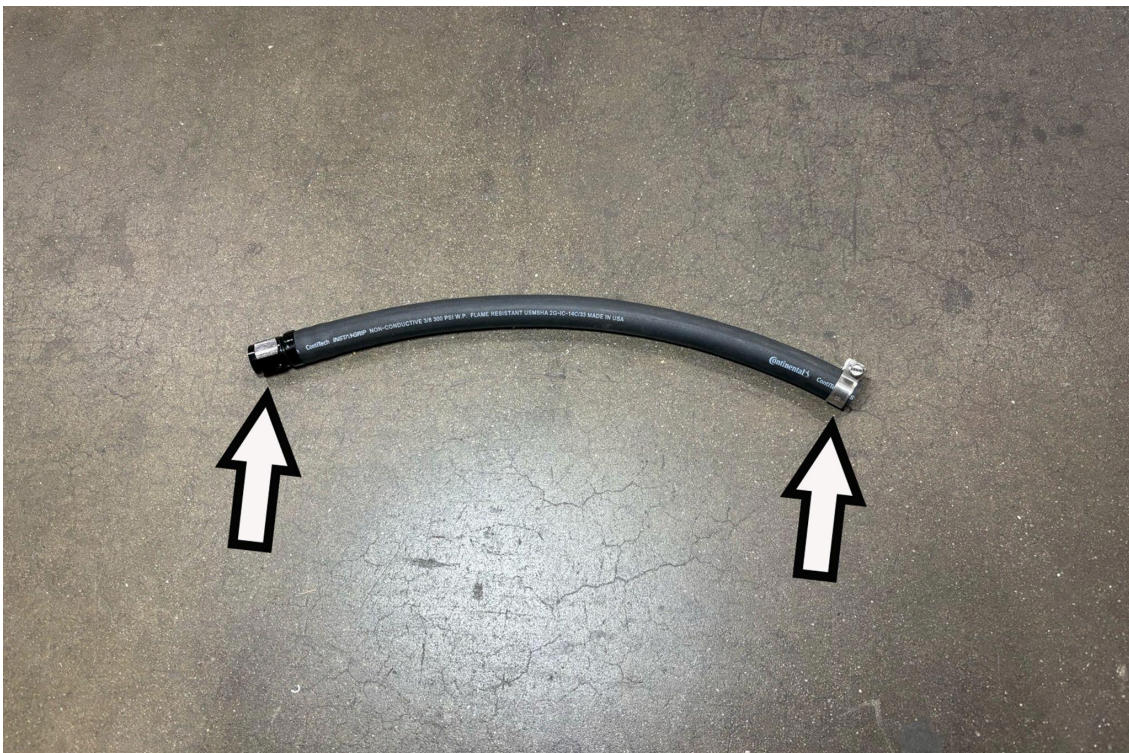

14. Attach the longer hose to the supplied -6 AN hose end fitting. Loosely fit the other provided FIC clamp onto the other end.

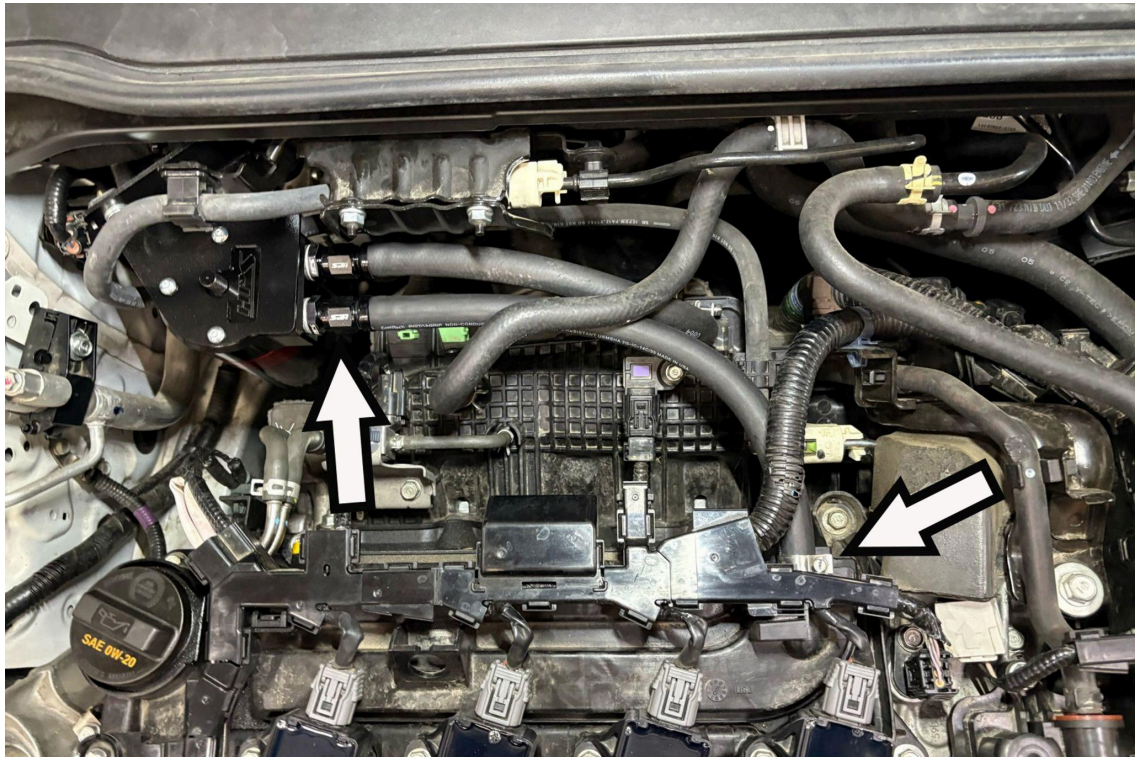

14. Connect and secure the hose to the breather port on the valve cover using the clamp and fasten the -6 AN hose end fitting to the front port of the oil catch can.

FINAL STEPS

Upon completion of the installation, reconnect the negative battery terminal before you start the engine. Double check to make sure everything is tight and properly positioned before starting the vehicle.

Start the engine. Let the car idle for 3 minutes. Perform a final inspection before driving. Listen carefully for any odd noises or rattles prior to taking it for a test drive. If any problems arise, go back and check the hoses and clamps that may be causing the issue and correct the problem.

Ensure that the dipstick on the HPS oil catch can is fully seated. Failure to install the dipstick properly will result in a check engine light and poor performance.



**Also available for
Acura 2023-2026 Integra 1.5L Turbo**



HPS Performance Front Strut Bar
Part Number [42-113](#)



HPS Performance Cold Air Intake Kit
Part Number [837-732](#)



HPS Performance Charge Pipe
(Manual Trans Only)
Part Number [17-167](#)



HPS Stainless Steel Magnetic Drain Plug
Part Number [MDP-M14x150](#)



HPS Billet Aluminum Oil Cap
Part Number [5269-104](#)

**Also available for
Honda 2022-2026 Civic 1.5L Turbo**



HPS Performance Front Strut Bar
Part Number [42-113](#)



HPS Performance Cold Air Intake Kit
Part Number [837-732](#)



HPS Performance Charge Pipe
(Manual Trans Only)
Part Number [17-167](#)



HPS Stainless Steel Magnetic Drain Plug
Part Number [MDP-M14x150](#)



HPS Billet Aluminum Oil Cap
Part Number [5269-104](#)

Contact an authorized HPS Performance dealer or
visit us at hpsperformance.com for more details