

Installation Instructions

I - Sheet Number INS-HS117 Rev.A



Hood Shield

For proper installation and best possible fit, please read all instructions BEFORE you begin.
For technical assistance or to obtain missing parts, please call Customer Relations at 1-800-344-8759.

Important Safety Information



- CAUTION - Before driving, ensure that the hood shield is properly secured to vehicle.
- Do not use automatic "brush-style" car washes.
- Do not use cleaning solvents of any kind.
- Periodically check all components for tightness.

Contents


NOTE: Actual product may vary from illustration.



Hood Shield



Fastener x4



Bracket x2



Screw x2



Washer x2



Bump On x4



Alcohol Pad


Tools Required



Car Wash Supplies



Clean Towel



Phillips Screwdriver


Preparation Before Painting / Installation

- A trial fit is recommended to ensure proper positioning and fit.
- Check fit of parts before painting as we will not accept the return of modified or painted parts.
- Wash and dry your vehicle to remove any debris and/or dirt from the installation area.

Installation Steps

NOTE: Actual application may vary slightly from illustrations.

Clean hood shield mounting location and raise hood.

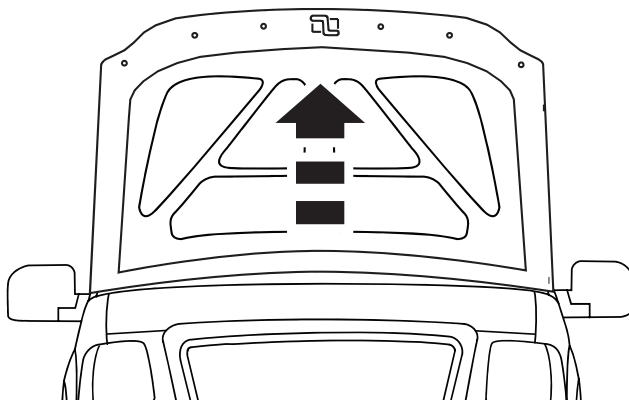

1

Installation Steps


NOTE: Actual application may vary slightly from drawings.

Center hood shield on hood and align with holes in hood. **If the two outboard mounting locations are round holes, proceed to Step 3.**

If the two outboard mounting locations are oval slots, proceed to Step 4.

2


Outboard mounting location
(round hole shown)

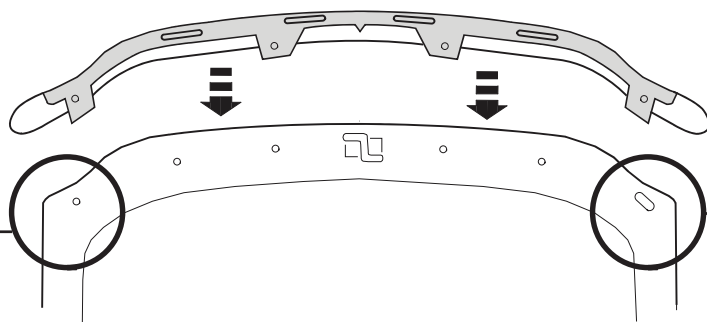


Outboard mounting location
(oval slot shown)



Attach hood shield to hood using (4) fasteners. Proceed to **Step 7**.

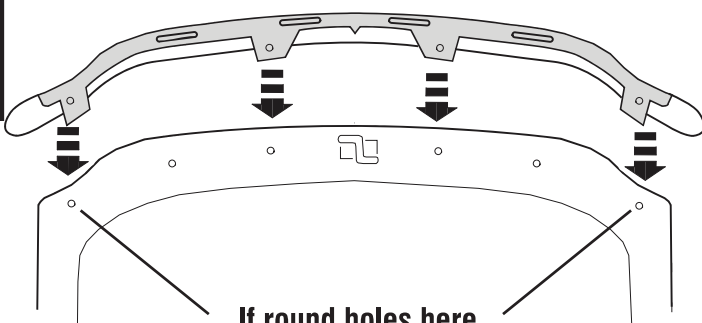


If round holes here

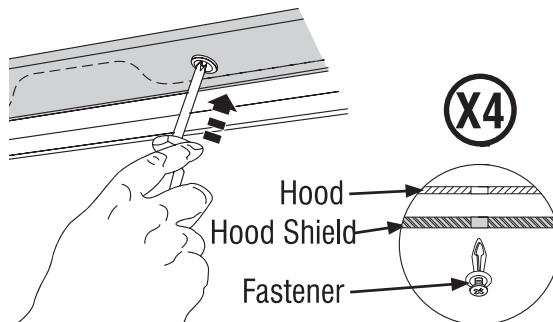


Do not over tighten!


3




Press a bracket into each **oval slot** mounting location prior to installing hood shield.

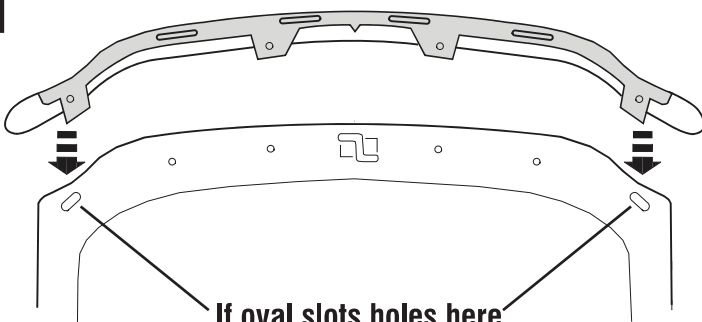


If oval slots holes here



4




Attach hood shield to hood using (2) fasteners at center mounting locations, and (2) screws with washers at **outboard** mounting locations.

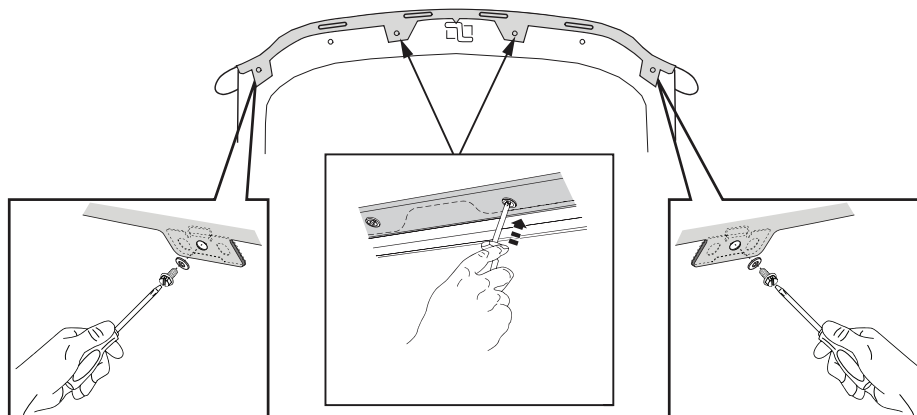

5

Installation Steps

NOTE: Actual application may vary slightly from drawings.

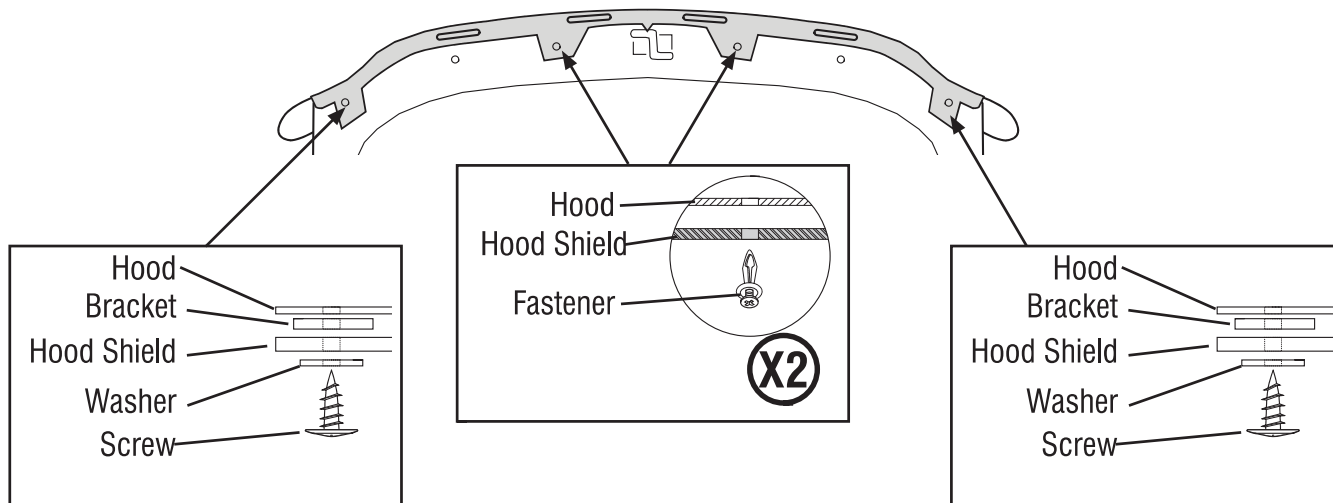


Do not over tighten!

6

Alcohol
Pad

Lower hood. Clean hood surface with an alcohol pad, and apply (4) bump on's to hood surface.

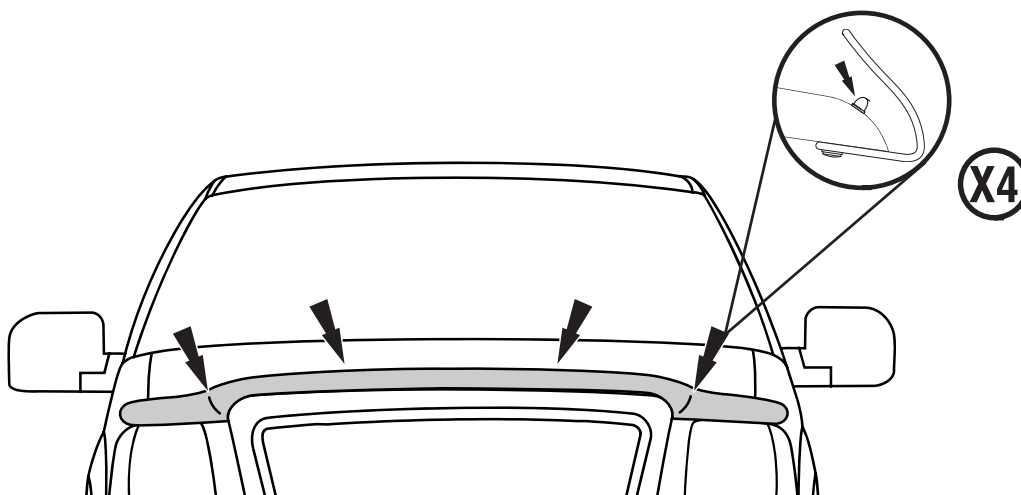

7

Care and Cleaning

- Wash only with mild soap & dry with a clean cloth.

Congratulations!

You have purchased one of the many quality Husky® branded products. We take the utmost pride in our products and want you to enjoy years of satisfaction from your investment. We have made every effort to ensure that your product is top quality in terms of fit, durability, finish and ease of installation.



1-800-344-8759 • Visit us at huskyliners.com

© 2024 Husky Liners, Inc. All rights reserved.

Husky® and the Husky® logo are trademarks of Husky Liners, Inc.