I - Sheet Number INS-HS45 Rev.D



#### **Hood Shield**

For proper installation and best possible fit, please read all instructions BEFORE you begin. For technical assistance or to obtain missing parts, please call Customer Relations at 1-800-344-8759.

### Important Safety Information



- CAUTION Before driving, ensure that the hood shield is properly anchored to vehicle.
- Do not use automatic "brush-style" car washes.
- Do not use cleaning solvents of any kind.
- Periodically check all components for tightness.

#### **Contents** NOTE: Actual product may vary from illustration.









Hood shield

Screw x4

Well Nut x4

Bump On x4


## **Tools Required**







Clean Towel



Phillips head screwdriver


## **Preparation Before Painting / Installation**

Open Hood. Remove (2) bumpers before installation.


- A trial fit is recommended to ensure proper positioning and fit.
- Check fit of parts before painting as we will not accept the return of modified or painted parts.
- Wash your vehicle's hood to remove any debris and/or dirt.
- Dry the hood with a clean towel.

#### **Installation Steps NOTE:** Actual application may vary slightly from illustrations.

Assemble fasteners by inserting screw through hood shield and into well nut. Hand tighten.



2

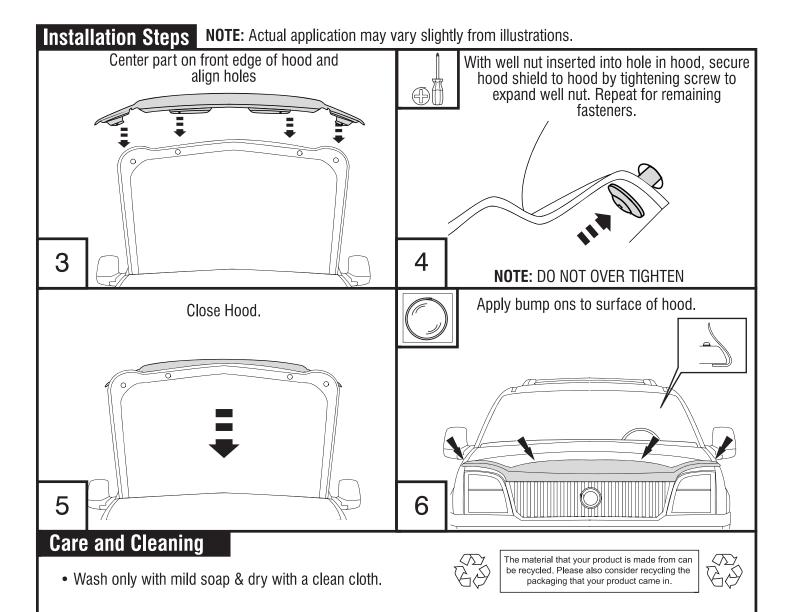

# **Congratulations!**

You have purchased one of the many quality Husky® branded products. We take the utmost pride in our products and want you to enjoy years of satisfaction from your investment. We have made every effort to ensure that your product is top quality in terms of fit, durability, finish and ease of installation.



1-800-344-8759 • Visit us at huskyliners.com
© 2024 Husky Liners, Inc. All rights reserved.
Husky® and the Husky® logo are trademarks of Husky Liners, Inc.