I - Sheet Number INS-HS82 Rev.D



Hood Shield

For proper installation and best possible fit, please read all instructions BEFORE you begin. For technical assistance or to obtain missing parts, please call Customer Relations at 1-800-344-8759.

Important Safety Information



- CAUTION Before driving, ensure that the hood shield is properly secured to vehicle.
- Do not use automatic "brush-style" car washes.
- · Do not use cleaning solvents of any kind.
- · Periodically check all components for tightness.

Contents NOTE: Actual product may vary from illustration.













Hood shield

Bump On x4

Hood Insert x2


Washer x2

Screws x2

Fastener x2

Tools Required







Clean Towel



Phillips screwdriver



Tape

Preparation Before Painting / Installation

• A trial fit is recommended to ensure proper positioning and fit.

Open hood. Locate (2) square holes on the underside of hood

- Check fit of parts before painting as we will not accept the return of modified or painted parts.
- Wash and dry your vehicle to remove any debris and/or dirt from the installation area.


Installation Steps NOTE: Actual application may vary slightly from illustrations.

and clean this area.



Press (2) hood inserts into the (2) square holes. If necessary use tape to hold them firmly in place.



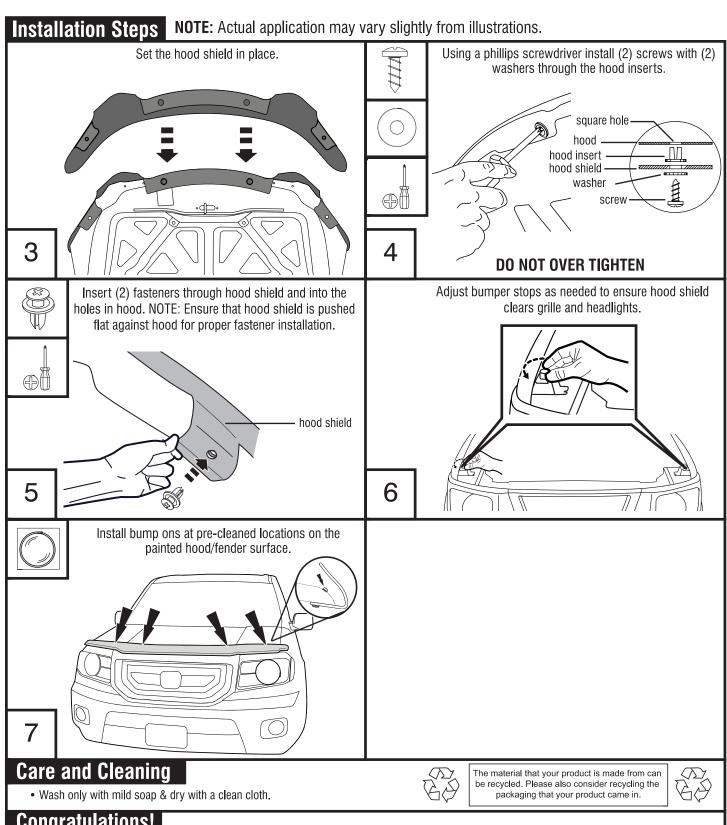

Congratulations!

You have purchased one of the many quality Husky® branded products. We take the utmost pride in our products and want you to enjoy years of satisfaction from your investment. We have made every effort to ensure that your product is top quality in terms of fit, durability, finish and ease of installation.

> 1-800-344-8759 • Visit us at huskyliners.com © 2024 Husky Liners, Inc. All rights reserved. Husky® and the Husky® logo are trademarks of Husky Liners, Inc.