



IAG Performance Stealth Mount Tag Delete For 2008-14 WRX / STI

Part# IAG-BDY-3210BK, IAG-BDY-3210BL

Thank you for choosing the IAG Tag Delete. The IAG Stealth Mount Tag Delete requires removal and reinstallation of the front bumper. IAG recommends professional installation for this product. If you do the installation yourself, please reference the OE Service Manual for anything not covered in these instructions. If you do not own a Service Manual you can access and download the Subaru Service Manual for your car online at techinfo.subaru.com (\$34.95).



Parts List		
Part Name	Quantity	Notes
IAG CNC Machined Tag Delete	1	
M4 Allen Screws	2	
IAG Square Washers	2	
3mm Allen Wrench	1	
Thread Locker	1	

2008-14 GR WRX / STI Stealth Mount



1. Align Tag Delete. The raised threaded bosses go inside the existing bumper holes.


2. Align recess with existing holes in bumper.



3. Apply a small amount of threadlocker (included) on the screws.



4. Insert IAG Square Washer into slot on bumper. It's easier to slide into place from the side.

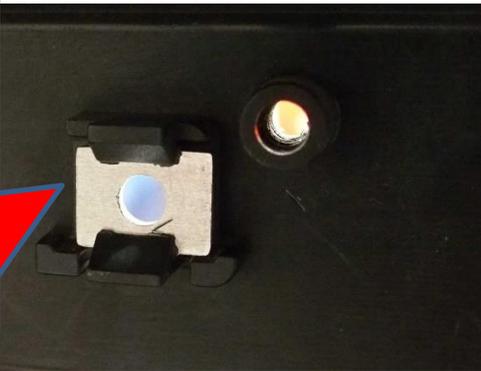

5. Use the allen key to hold the screw in place for the next step.



6. This is what the screw should look like when held with the allen wrench from behind.



7. Screw one side of the tag bracket in. Do not tighten. Repeat for both sides.



8. After both sides are started, tighten screws.



7. Finished

