




## Class III Receiver Hitch Part No. 69663C



Fits: **NISSAN NV 1500, 2500, & 3500 (ALL MODELS)**




GROSS LOAD CAPACITY WHEN USED AS A WEIGHT CARRYING HITCH: 7,500 LBS. TRAILER WEIGHT & 750 LBS. TONGUE WEIGHT.  
GROSS LOAD CAPACITY WHEN USED AS A WEIGHT DISTRIBUTION HITCH: 10,000 LBS. TRAILER WEIGHT & 1000 LBS. TONGUE WEIGHT

**WARNING: \*\*\* DO NOT EXCEED VEHICLE MANUFACTURER'S RECOMMENDED TOWING CAPACITY. \*\*\***




Parts List			
ITEM	QTY	PART NUMBER	DESCRIPTION
1	8	10-10277	HHCS,M12x1.25,40CL10.9,YZ
2	8	30-00149	WASHER,S-CON,1/2,YZ

TOOLS REQUIRED	
TORQUE WRENCH	
RATCHET	
19mm SOCKET	



### WELDNUT CLEANING

To remove debris from weldnuts in frame, spray lubricant or compressed air into hole.  
For heavy debris, use a small wire brush.  
(Be careful not to damage threads).

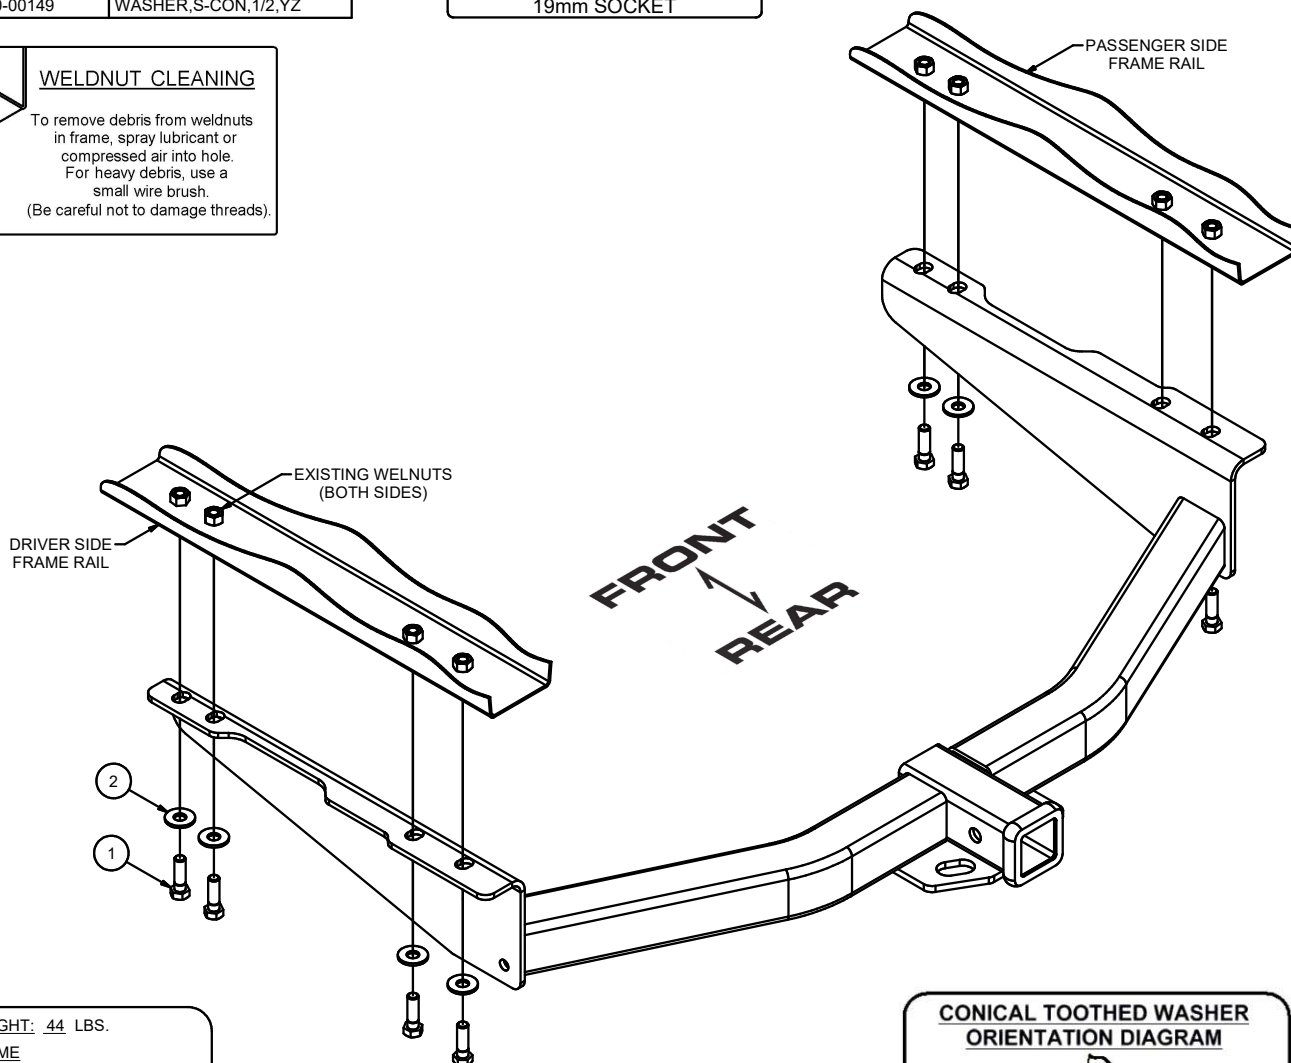

HITCH WEIGHT: 44 LBS.

### INSTALL TIME


PROFESSIONAL: 10 MINUTES

NOVICE (DIY): 20 MINUTES

### INSTALL NOTES:

- NO DRILLING REQUIRED
- NO TRIMMING REQUIRED

### CONICAL TOOTHED WASHER ORIENTATION DIAGRAM

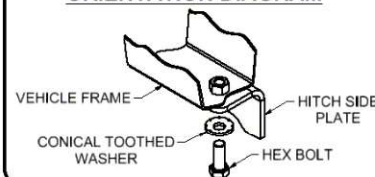

## INSTALLATION STEPS

1. Raise hitch into position aligning holes in hitch with weldnuts in the frame rails. See Weldnut Cleaning Detail
2. Secure hitch to weldnuts using M12-1.25 x 40 hex bolts and 1/2" conical toothed washers.
3. Torque all M12 hardware to 86 ft-lbs.

**PERIODICALLY CHECK THIS RECEIVER HITCH TO ENSURE THAT ALL FASTENERS ARE TIGHT AND THAT ALL STRUCTURAL COMPONENTS ARE SOUND.**

Keystone Automotive Operations Inc., warrants this product to be free of defects in material and/or workmanship at the time of retail purchase by the original purchaser. If the product is found to be defective, Keystone Automotive Operations Inc., may repair or replace the product, at their option, when the product is returned, prepaid, with proof of purchase. Alteration to, misuse of, or improper installation of this product voids the warranty. Keystone Automotive Operations Inc.'s liability is limited to repair or replacement of products found to be defective, and specifically excludes liability for incidental or consequential loss or damage. This product complies with safety specifications and requirements for connecting devices and towing systems of the state of New York, V.E.S.C. Regulation V-5 and SAE J684. For Technical & Warranty Support : 1-877-544-4449 Fax- 1-855-242-8922 [www.huskytow.com](http://www.huskytow.com)

12/1/2021