



# Rear Fender Flare J052RF



**2007 - Current:**

**Jeep Wrangler JK**



TO AVOID BEING SCRATCHED, PLEASE PROTECT THE SURFACE OF THE FENDER FLARE CAREFULLY.



REMOVE CONTENTS FROM BOX. VERIFY ALL PARTS ARE PRESENT.




READ INSTRUCTIONS CAREFULLY BEFORE STARTING INSTALLATION.



PLEASE USE SAFETY GLASSES & ENSURE TO BLOCK VEHICLE MOVEMENT DURING INSTALLATION PROCESS



60-180 min



Cutting Not Required



Drilling Not Required



[support@trailfx.com](mailto:support@trailfx.com)




1 866 638 4870



**LIMITED 3 YEARS**

### HARDWARE PARTS LIST

Qty	Part Description	Qty	Part Description
4	M8x50 Outer Hex Bolts	10	M6x50 Outer Hex Bolts
10	M6x20x2 Flat Washer	4	M8x24x2 Flat Washer
10	M6 Rivet nuts	4	M8 Hexagon flange nuts

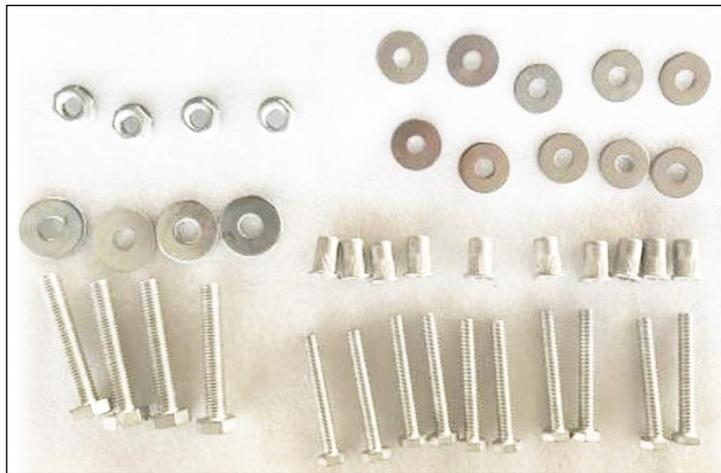

### INSTRUCTION PROCEDURE

1. Please check the Hardware counts as per the list above.




Use the below hardware parts to install fender flare

- 5xM6 Rivet nuts
- M6 Rivet nuts into the hole in the car.
- 5xM6x5 Outer Hex Bolts
- 5xM6x20x2 Flat Washer.



Use the below hardware parts to install fender flare

- 2xM8x50 Outer Hex Bolts
- 2xM8x24x2 Flat Washer
- 2xM8 Hexagon flange nuts

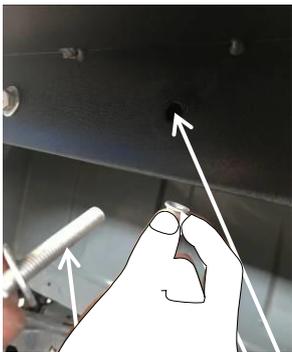

Install bolts and nuts on the corresponding hole.



Install bolts and nuts on the corresponding hole.



Installation completed

**PRODUCT CARE**

1. Periodically check the product to ensure all fasteners are tight and components are intact.
2. Regular waxing is recommended to protect the finish of the product.
3. **Use ONLY Non-Abrasive automotive wax.** Use of any soap, polish or wax that contains an abrasive is detrimental and Can scratch the finish leading to corrosion.

**FAQ's**

1. **Products are thumping / rattling after installation.**  
*Please ensure that all required mounting brackets / hardware's are installed & tighten correctly.*
2. **Missing / Excess Hardware.**  
*Recheck hardware count as per the part list.*

Check out these other TrailFX Products!!

www.TrailFX.com




**SIDE BAR**



**HEADACHE RACKS**



**BED RAILS**

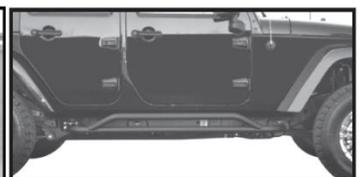

**ROCKER GUARDS**

*Keystone Automotive Operations Inc. (KAO) warrants this product to be free of defects in material and workmanship at the time of purchase by the original retail consumer. KAO disclaims any other warranties, express or implied, including the warranty of fitness for a particular purpose or an intended use. If the product is found to be defective, KAO may replace or repair the product at our option, when the product is returned prepaid, with proof of purchase. Alteration to, improper installation, or misuse of this product voids the warranty. KAO's liability is limited to repair or replacement of products found to be defective, and specifically excludes liability for any incidental or consequential loss or damage.*