



Assembly, Installation, Operation and  
Maintenance Instructions  
**Tailgate Cover**

**Part Number:  
RLIK27**

**Install Time:  
30 minutes**

**WARNING: PLEASE READ INSTRUCTIONS CAREFULLY BEFORE STARTING THE INSTALLATION.**

**APPLICATION:** *For use with various applications*

**Parts List:**

Description	Qty
Flat Washers	8
Tools Required	
Torx Screwdriver (T30)	

**Care and Maintenance:** To protect the finish of this product, clean with soap and water, do not use abrasive substances.



**Part Number: RLIK27**

**Missing Parts – Contact TrailFX at**

1(866) 638-4870 or [support@trailfx.com](mailto:support@trailfx.com)

Any required parts will be shipped to you directly – DO NOT return whole kit to store!


## INSTALLATION PROCEDURE:

1. **PLEASE READ INSTRUCTIONS CAREFULLY BEFORE STARTING THE INSTALLATION.** One person can perform the installation.



2. **Vehicle Preparation:** Thoroughly wash and dry the tailgate and surrounding areas.

3. Using a Torx screwdriver (T30), Remove the 6 or 8 OEM screws that correspond with the pre-drilled holes in the tailgate cover.

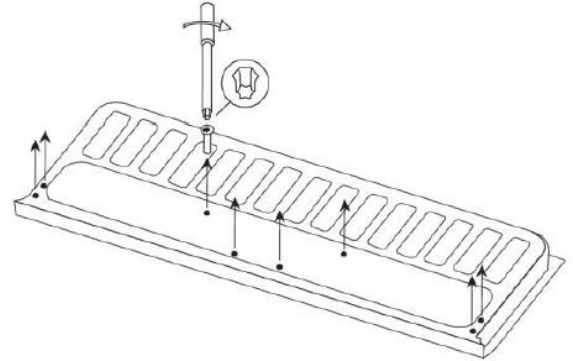

### DO NOT DISCARD OEM SCREWS

4. Install tailgate cover using the OEM screws saved from step 3 and the flat washers provided.

