

Tools required for a safe and smooth installation:

Proper Jack & Jack Stands, Tube Wrenches, Standard Socket Set, Standard Wrench Set, Torque Wrench, Lug Wrench, Pliers, Mallet, Brake Fluid, Brake Cleaner, Wheel Bearing Grease.

Drum Brake Removal:

1. Safely raise the vehicle off the ground until the wheels are clear and spin freely. Support the vehicle using the appropriate Jack Stands and remove the front wheels.
2. Starting at the front wheel hub, remove the grease cap, cotter pin, lock nut and flat washer from the spindle as well as the outer bearing.
3. You should now be able to slide the hub/drum assembly off the spindle. If you have trouble removing this assembly you may need to retract the brake shoes by inserting a flathead screwdriver into the adjustment slot in the drum brake backing plate. Use the screwdriver to disengage the adjusting lever from the adjusting screw. You should now be able to turn the adjusting screw to retract the brake shoes.
4. Before you remove the drum brake backing plate you will want to remove all brake fluid from your brake system. ***Be very careful not spill any brake fluid on any painted surfaces as it will damage your paint.*** To remove the brake fluid from your system first remove the lid from your master cylinder. Next place one end of a clear hose on the bleeder of your wheel cylinder and the other into a suitable container. Finally open the bleeder screw until all fluid has been removed from your system
5. From under the dash disconnect the pushrod from the pedal assembly.
6. Disconnect the brake line(s) from your master cylinder. Remove the retaining hardware and remove the master cylinder and or power booster from the firewall. This assembly will also include the pushrod that was previously disconnected from the pedal.
7. Disconnect the hard brake line from your flexible hose at the frame rail. It is recommended you use a tube wrench as to not damage the brake line fittings. If your fittings look rusty spray them with penetrating oil and let them soak for easy removal.
8. Remove the horseshoe clip from the brake hose at the frame mount.
9. Remove the drum brake backing plate assembly by removing the 4 retaining bolts and nuts attaching it to your spindle. Again the use of penetrating oil is recommended on any rusty hardware for easy removal.

Inspection:

Once you have removed all drum brake components from your spindles it is recommended that you clean your spindles bearing surfaces. Check for any debris or signs of damage to the spindle. Any light damage caused by rust can usually be cleaned up with an emery cloth.

At this point you should also test install your new bearings onto the spindle to ensure proper fitment without interference.

Brake Kit Installation:

1. The calipers will be installed on the front side of the spindle. Install **Caliper mounting brackets** so that the caliper mounting holes are orientated towards the front of the car. **Photo 2**
2. The caliper mounting bracket can be installed on the outside face of the factory spindle. Use the 7/16" bolts and lock washers to secure the upper holes and use the 5/8" nut, bolt and lock washer to secure the lower front hole. The factory hardware should be reinstalled in the lower rear hole. Torque the 7/16" bolts to 45-50 ft. lbs. and torque the 5/8" bolts to 125 ft. lbs.
3. Next you will need to properly pack the **inner and outer bearings** with grease prior to installation.
4. Remove the protective coating from your **rotors** on both the braking surface and bearing race surfaces using a brake cleaner available at your local parts store.
5. Install the greased **inner bearing** into the inner race of the **rotor**. **Photo 5**
6. Lightly pack grease into the inner lip of the **grease seal**. Next install the **grease seal** into the inner portion of the **rotor** using a soft mallet or piece of wood. This will prevent any damage from occurring during installation. * **The lip of the seal should face the bearing when installed. Photo 6**
7. Slide the supplied in spacer onto the spindle prior to installing the rotor. This will insure the rotor sits in the proper position on the spindle. The beveled face will point in.
8. Slide the **rotor** onto the **spindle** and install the greased **outer bearing, slotted washer** and **adjusting nut**. **Photo 7**
 - a. **Proper adjustment of the bearings is VERY IMPORTANT.** Rotate the rotor while tightening the spindle nut to 18-24 ft lbs. Next back off the adjustment nut about 1/2 turn and retighten to 10-15 ft lbs while aligning the retaining slots with the cotter pin hole in the spindle.
 - b. Install **cotter pin**, bend cotter pin so that each side is bent in the opposite direction of the other.
 - c. Install the **grease cap**. **Photo 8**
 - d. Spin the rotor to insure there is no interference with the grease cap and retaining assembly.
9. **Calipers** should arrive preloaded, if they are not you must install the brake pads so that the friction material is facing each other. Next install the metal retaining clips using the 1/4" bolts and lock washers supplied. Torque to 7-11 ft lbs. **Photo 9**
10. Install the **calipers** with the bleeder facing up. Use the **7/16-20 x 2" bolts** and lock washers provided. Place one of the supplied tube spacers between the caliper mounting boss and the caliper mounting bracket at each hole. Torque to 45-60 ft. lbs. **Photo 10 & 11**
11. Once the calipers are installed spin the rotors to insure there is no interference between the caliper and the rotor. If the caliper is not centered over the rotor you may need to install the additional shim washers included with the kit. These should be placed between the caliper mounting bracket and the tube spacer at each mounting hole. This will move the caliper inboard towards the engine.
12. Install the **flex hose** to the **caliper** using (1) **copper washer** between the hose fitting and the caliper. **Photo 12**
13. Install the other end of the flex hose to the frame bracket and retain it using the **horseshoe clip** provided. Reconnect the original hard line and tighten using a tube wrench.
14. Turn the wheels thru a complete left and right turn to insure there is no interference with the new brake system and any suspension or body components. Also check the rubber hoses during this operation to insure the hoses are not binding or twisting. If your rubber hoses bind during a turn you could experience loss of braking while driving. If it looks like they are binding remove the horseshoe clip and reposition the brake hose until it no longer binds.

Power Booster Installation

1. The supplied power brake booster is designed for factory manual brake cars. If you have a factory power brake car you can either obtain a manual brake firewall plate or modify your power brake firewall plate as outlined in the attached diagrams.
2. Align the supplied power booster with the holes on the firewall and slide the pushrod through the hole in the firewall. Secure the assembly to the firewall using your original hardware.
3. From under the dash connect the booster pushrod to the brake pedal and secure with the original hardware. Make sure the pedal moves freely without binding and that the brake lights turn on and off as the pedal is applied and released.
4. Use a **vacuum hose** to connect the power booster to a direct source of engine manifold vacuum or an aftermarket vacuum pump.
5. Temporarily install the master cylinder on the power booster studs. This will allow you to route the new brake lines, **but the master cylinder must be removed for bench bleeding.**
6. If your car had a factory single bowl master cylinder proceed to step 8. If your car already had a factory style dual bowl master cylinder installed originally remove the brake line that feeds the front brakes. Using the line supplied with the **green fitting** connect the front brake port (rear port) of the new master cylinder to the open port of the factory brass block.
7. Remove the brake line that feeds the rear brakes and using the other line supplied connect the rear brake port (front port) of the new master cylinder to the open port of the factory brass block.
8. Disconnect the rear brake line from the brass block. Connect the line to the **“out” port** of the adjustable proportioning valve supplied. Then using the short brake line supplied connect the **“in” port** of the valve to the rear port of the brass block. Proceed to step 11.
9. If your car had a single bowl master cylinder installed originally remove the line that ran from the master cylinder to the brass block. Using the supplied line with the green fitting connect the front brake port (rear port) of the new master cylinder to the top port of the brass block.
10. Disconnect the rear brake line from the brass block and plug that port with the **3/8-24 plug** provided.
11. Connect the line to the **“out” port** of the adjustable proportioning valve supplied.
12. Using the other brake line supplied connect the rear brake port (front port) of the new master cylinder supplied to the **“in” port** of the adjustable proportioning valve
13. With the lines now properly routed remove the master cylinder and follow the bench bleeding instructions.

Master Cylinder Bench Bleeding

1. Before you re-install your master cylinder you must **bench bleed** it in a vice off of the vehicle using the **bench bleeder kit** provided.
2. To Bench Bleed
 - a. Place your master cylinder in a **vice** by the mounting ears.
 - b. Attach a clear plastic hose to the short end of each of the plastic nozzles provided.
 - c. Clip the plastic bridge onto the partition wall of the master cylinder and insert each plastic tube into the holes insuring the end of the tube will be fully submerged in the brake fluid.
 - d. Press the tapered end of the nozzles firmly into the master cylinder ports with a twisting motion.
 - e. Fill the reservoir with new clean brake fluid (DOT 3 or DOT 4 Recommended).

- f. Using a large Phillips head screwdriver push the piston in, then release using full strokes. This MUST be done until ALL air has disappeared from the clear plastic hoses.

CAUTION- MASTER CYLINDER WILL NOT BLEED PROPERLY IF HOSES ARE NOT FULLY SUBMERGED IN BRAKE FLUID UNTIL THE BLEEDING PROCESS IS COMPLETE

Master Cylinder Install:

1. Remove the master cylinder from the vice and install on the power booster, secure with the supplied hardware.
Be very careful not spill any brake fluid on any painted surfaces as it will damage your paint.
2. Carefully remove the bleeder kit nozzles and install the brake lines in the appropriate ports.
3. Install the brake lines you routed previously into the correct ports of the master cylinder
4. Tighten all brake lines with a tube wrench and check for leaks.

Bleeding the vehicles braking system:

We recommend that the brake system is bled using a gravity bleed method. While there are many ways to bleed a system this way is less likely to introduce air in the system causing a spongy pedal. Whenever bleeding your system you must keep an eye on your fluid level. If your master runs dry you will have to bench bleed the master again.

1. Remove the cap from the master cylinder.
2. Starting at the right rear wheel cylinder or caliper attach a clear hose to the bleeder with the other end in a clear container.
3. Open the bleeder and observe the fluid flow. It may take a couple of minutes for the fluid to flow with a new system. Once the fluid begins to flow let it drip until you do not see any air.
4. Move to the left rear wheel, repeat step 3.
5. Move to the right front wheel, repeat step 3.
6. Move to the left front wheel, repeat step 3.
7. Repeat steps 2 thru 6 once more.
8. Install the lid on the master cylinder.
9. Pump the brake pedal until you achieve a firm pedal.
10. Remove lid on master cylinder & check fluid level
11. Repeat steps 2 thru 6 to insure all air has been removed.

Adjustable Proportioning Valve Adjustment

1. The adjustable proportioning valve is meant to control rear brake lockup by limiting the pressure to the rear brakes. If the rear brakes lockup prematurely the car can be difficult to control during a hard stop.
2. The valve provides a maximum of a 55% reduction in rear brake pressure. Meaning that even when adjusted to the full decrease position it will not shut off the rear brakes. Count the turns from the full decrease position to the full increase position. Turn the knob back in the full decrease direction half that number of turns. This will give you a good starting point for most vehicles.

3. Once you are confident that the brakes are fully bleed, working properly and broken in you can make several stops in a safe open area to determine your ideal setting. The goal is to provide as much pressure as possible to the rear brakes without locking them up prior to the front brakes.

Once you feel you have successfully removed all air from your brake system check all fittings and lines for leaks and verify all fasteners are tight. Install your wheels, and spin them to insure they still spin freely making sure the caliper doesn't interfere with the wheel and your brakes are not dragging or locked up.

You may now take your vehicle for a test drive in a safe area. We recommend that you drive the vehicle with light to medium application of the brakes for the first 150-200 miles. This will allow your brake pads to properly seat to your rotors to insure optimal braking performance.

If you have any questions please call our tech line at (716) 852-2139

Thank you for purchasing from Leed Brakes we hope you have had an enjoyable experience



Installation Photos

Disc Brake Conversion Kit

Applications: 1965-72 Dodge and Plymouth B&E-body cars



← Front of Car

Photo 1

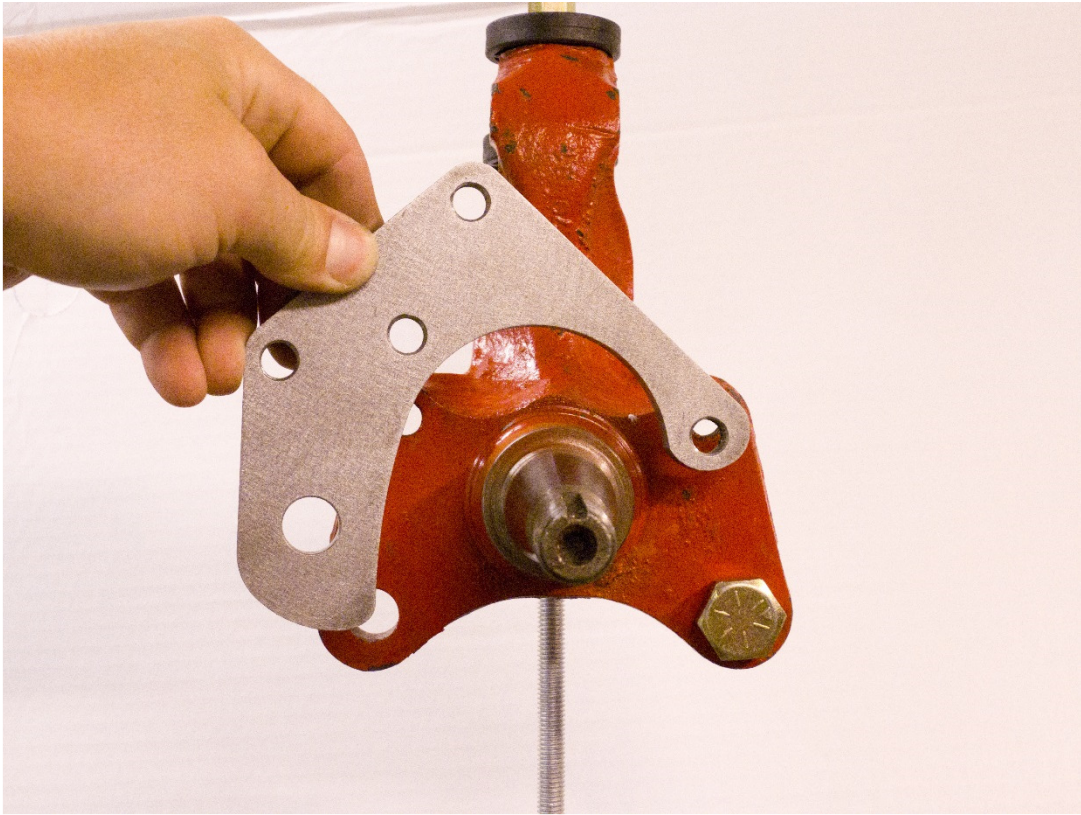


Photo 2

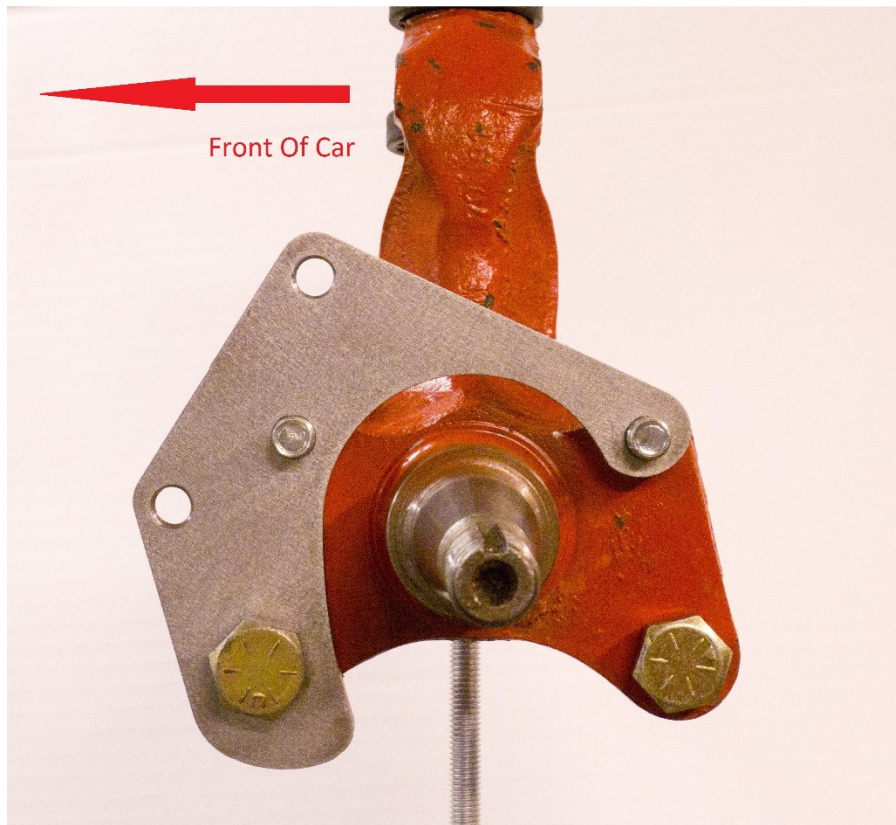


Photo 3

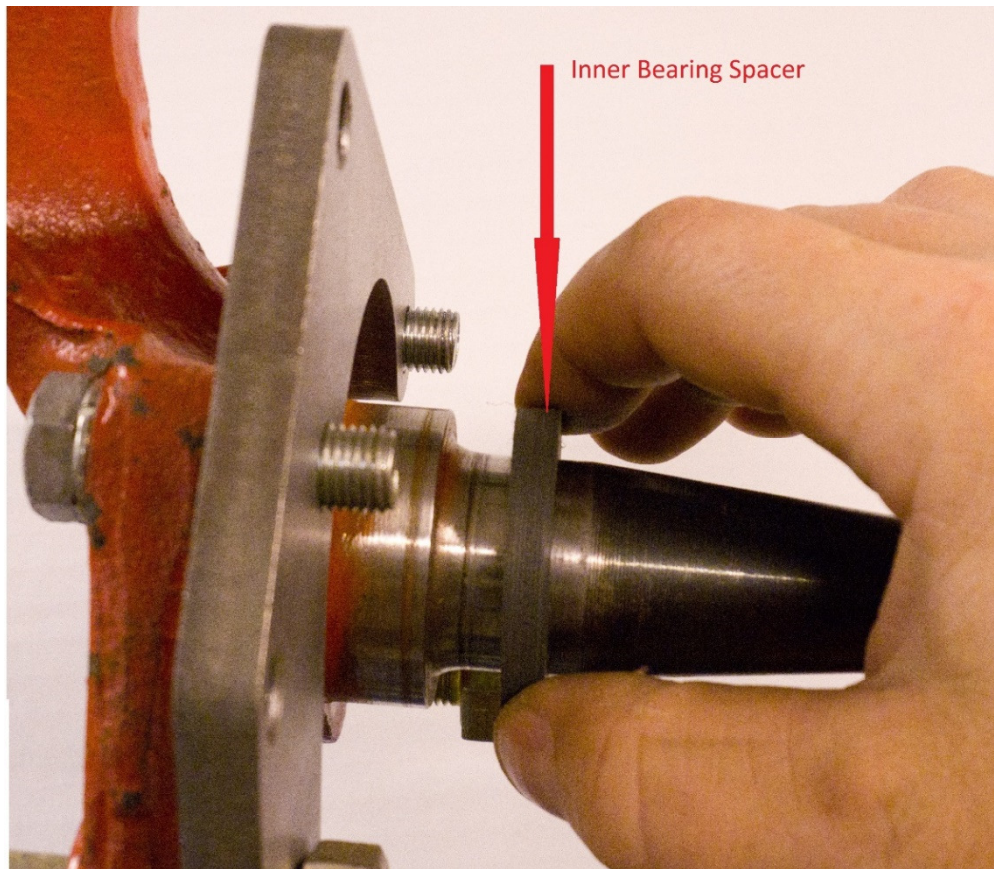


Photo 4

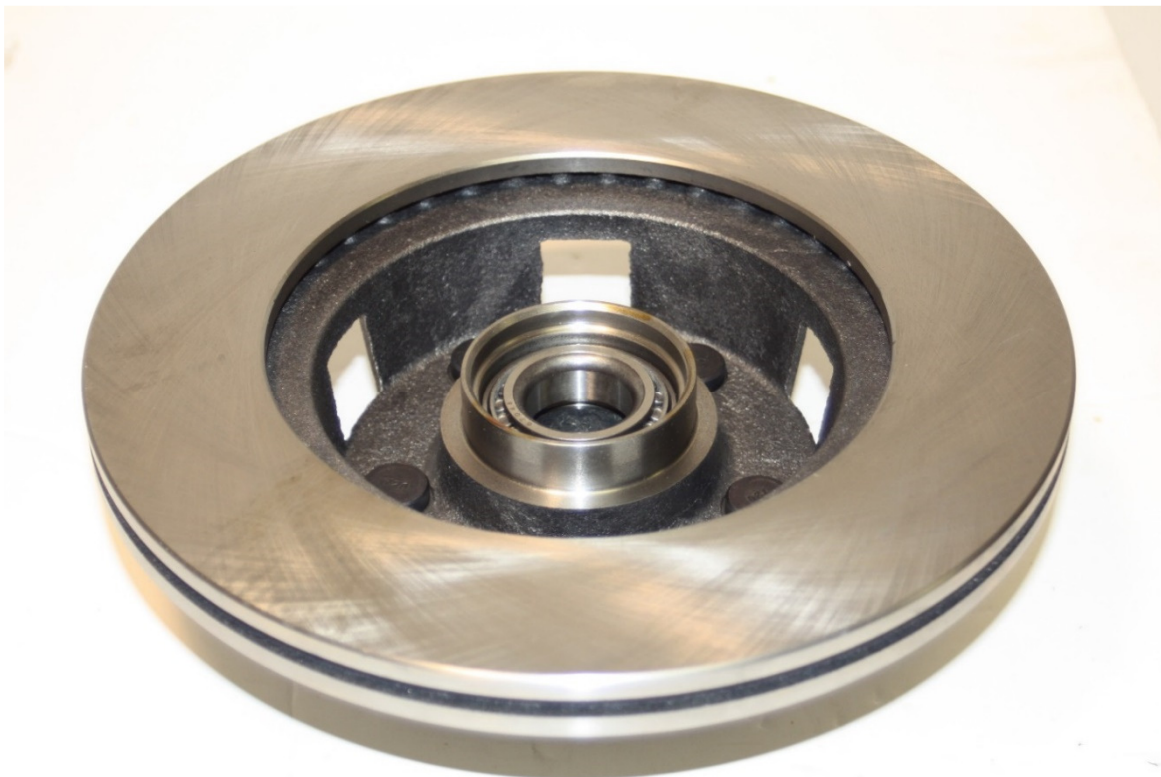


Photo 5

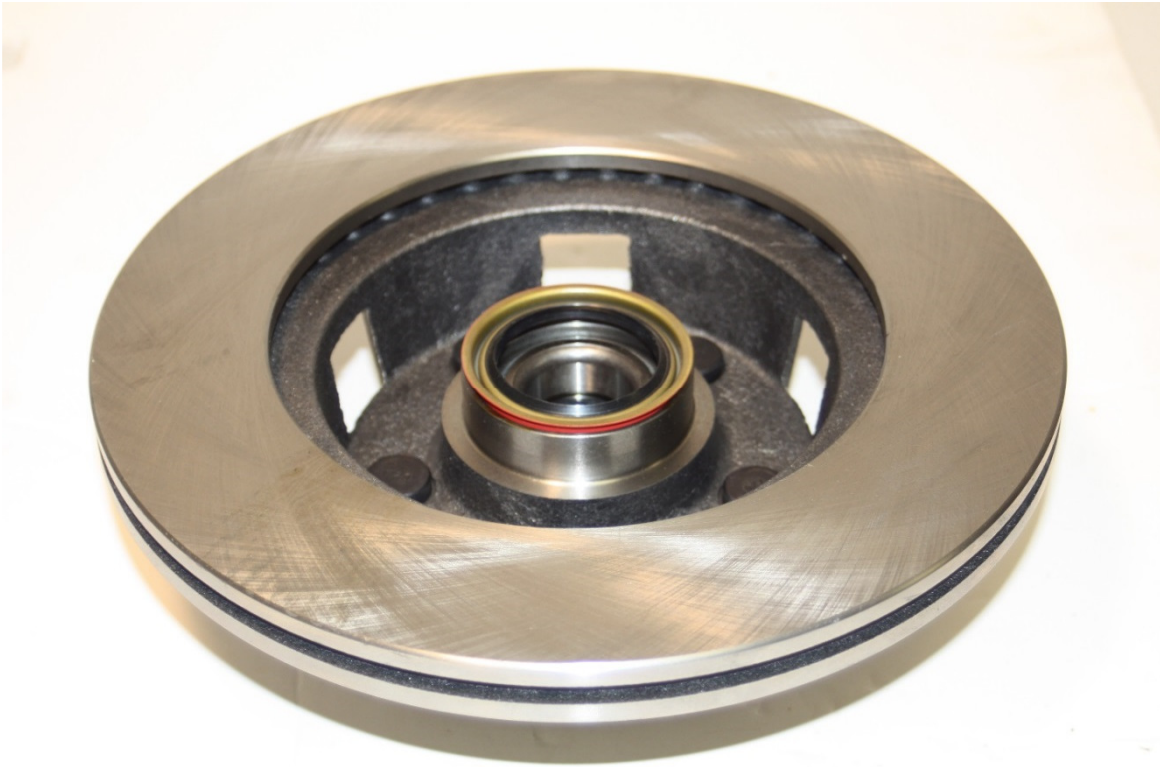


Photo 6



Photo 7



Photo 8



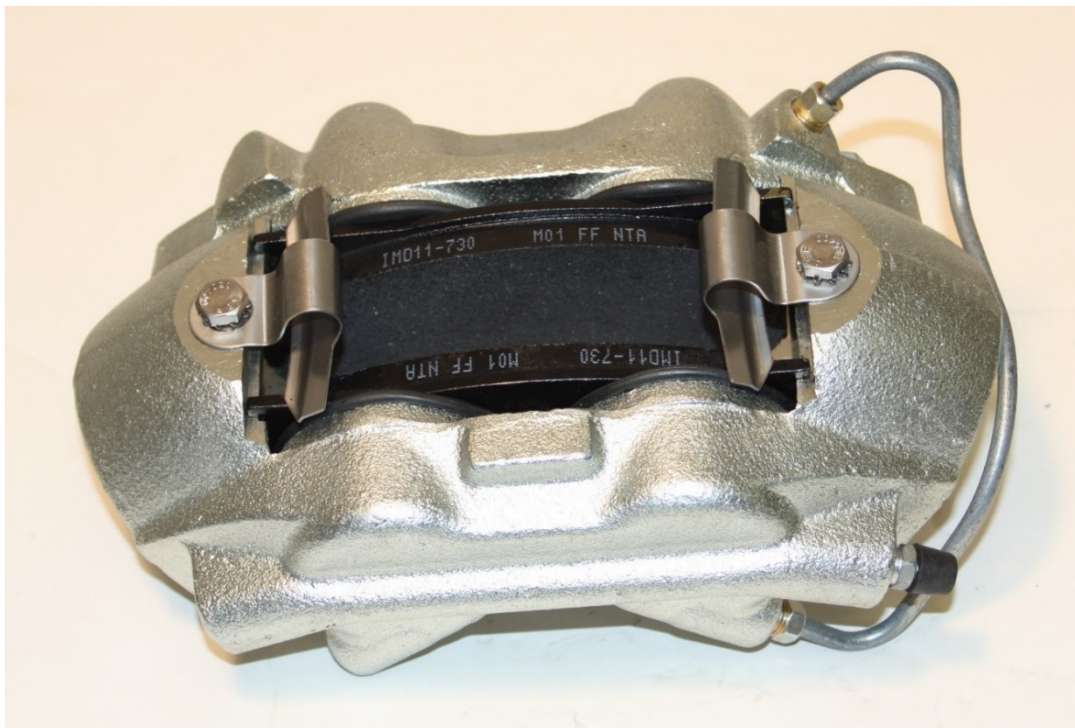


Photo 9

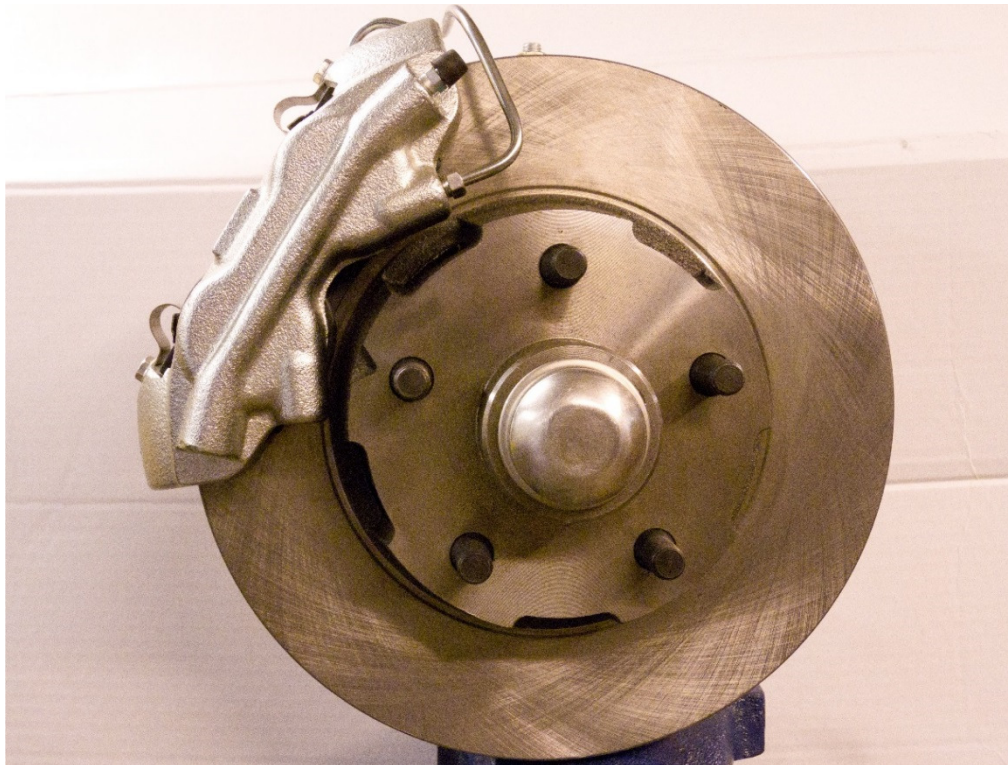

← Front of Car

Photo 10

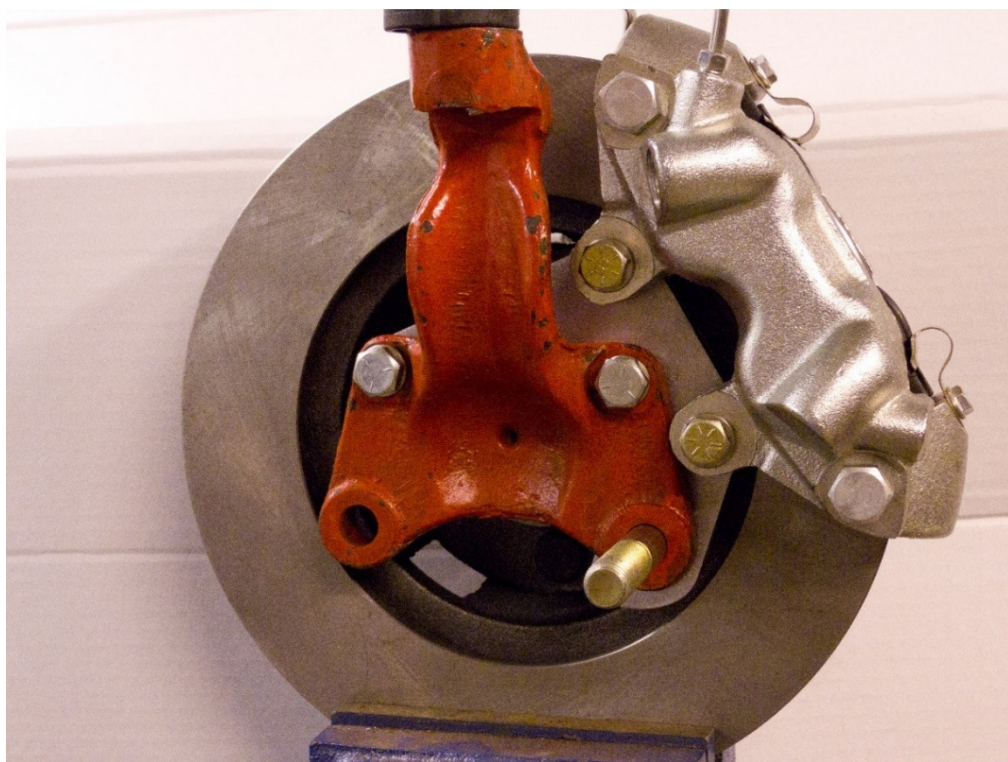

Front of car→

Photo 11


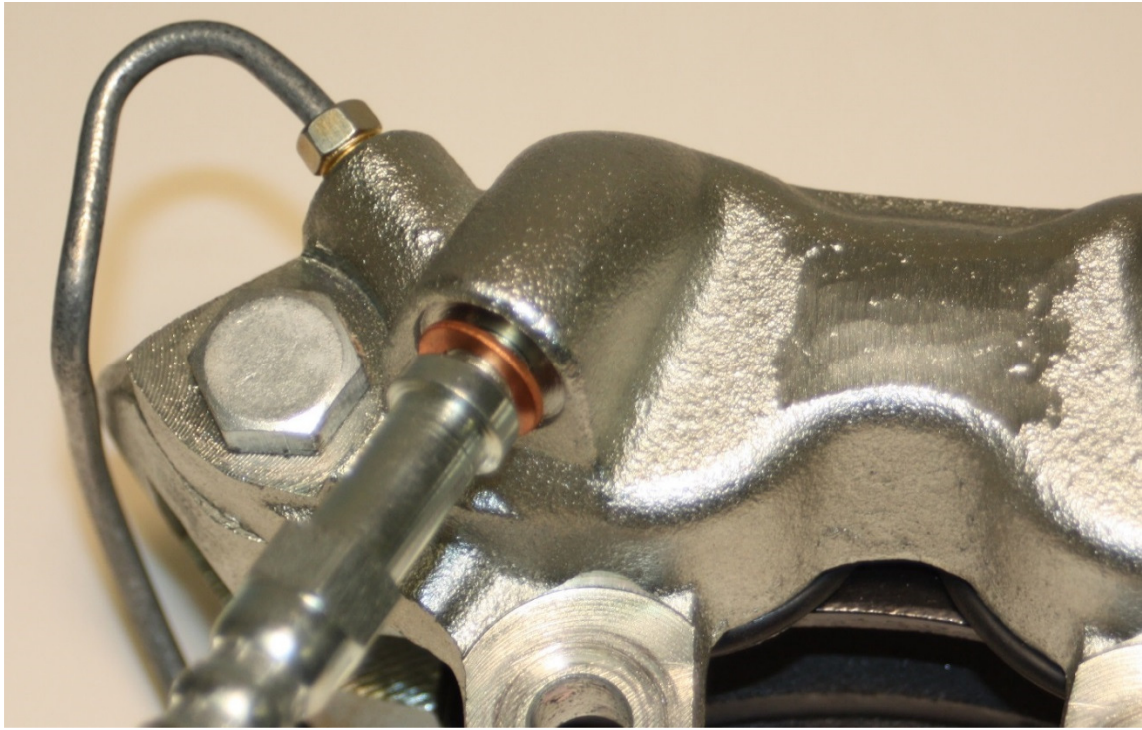


Photo 12

1966 And Later B & E-body Plate



1965 And Earlier B-Body Plate

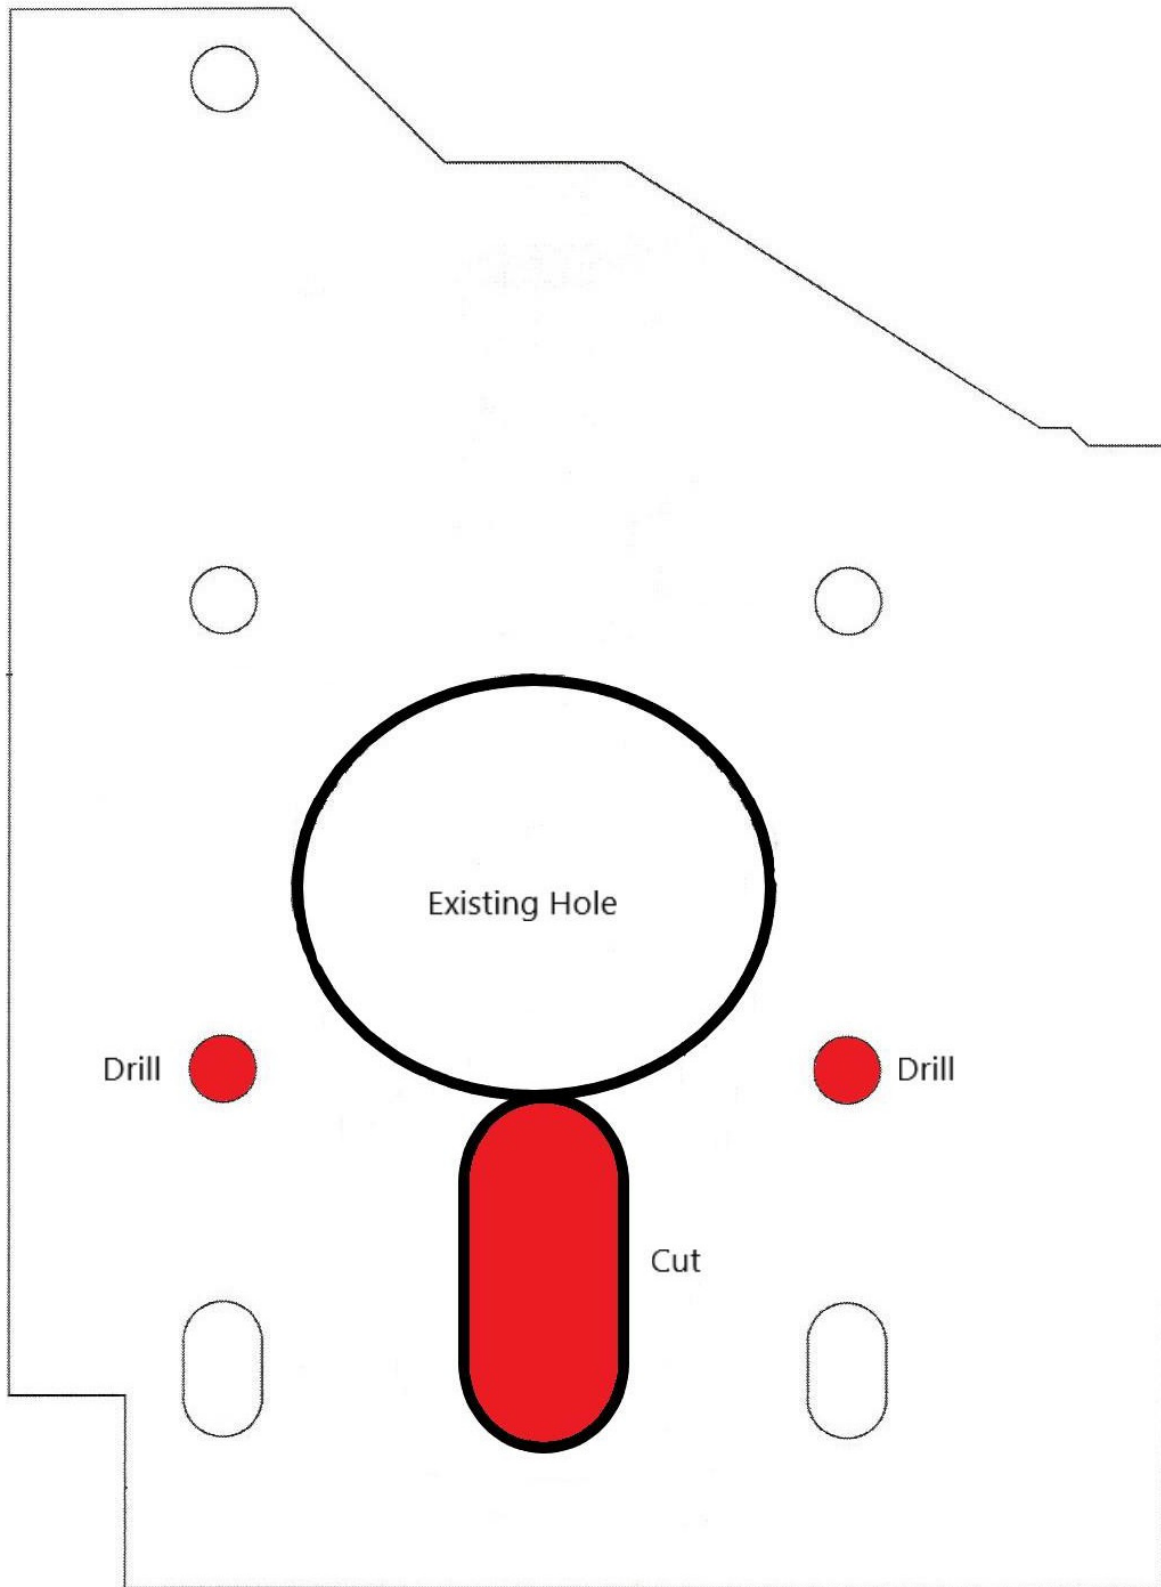