

# INSTALLATION GUIDE

Borne Off-Road Universal Lighting
SKU: BNLT-LB, BNLT-LP, BNLT-RL, BNLT-RD7

### • TABLE OF CONTENTS

- 1. RESOURCES & CONTACT INFO
- 2. IMPORTANT SAFETY INFORMATION LIGHT POD INSTALLATION
- 3. LIGHT BAR INSTALLATION
- 4. ROUND LIGHT INSTALLATION
- 5. ROCK LIGHT INSTALLATION



### **RESOURCES & CONTACT**



CALL 1.877.466.4744 CUSTOMER SERVICE HOURS: MON-FRI 8:30AM-5:00PM EST



@BORNEOFFROAD



@BORNEOFF-ROAD



**BORNEOFFROAD** 



@BORNEOFFROAD



ENGINEERING BLOG

IMPORTANT SAFETY INFORMATION & INSTALLATION INSTRUCTIONS

### IMPORTANT SAFETY INFORMATION

- Please read through all of these instructions and tips before proceeding with installation. We aim to provide a simple installation process for all applications. However, a professional installation is always recommended.
- IMPORTANT Always disconnect any power sources connected to your vehicle before servicing fuses or electrical systems.

### NOTE

- **1.** Borne Off-Road lights are designed to operate from 9V-16V only. Using this product on a 24V or higher system will cause permanent damage to electrical components.
- 2. These lights are intended for off-road use only.


LIGHT PODS		
DESCRIPTION	QUANTITY	
M6 Lock Washers	4	
M6 Button Head Bolts	4	
Nylon Fastener Covers	4	
M8 Hex Head Bolts	2	
M8 Nylon Lock Nuts	2	
Universal Mounting Brackets	2	
Universal Wiring Harness	1	

# MOUNTING INSTALLATION INSTRUCTIONS

- 1. Insert mounting brackets onto light as shown.
- **2.** Secure hardware to a snug position and mount your light in desired location.


# WIRING HARNESS INSTALLATION INSTRUCTIONS

- **1.** Always disconnect the negative battery terminal when working with any electrical circuits.
- 2. When routing wires through any metal or abrasive surfaces, ensure the surface is free of any sharp edges to prevent wire damage and/or electrical shorts.
- **3.** Route main power and ground leads from the harness to the battery terminals and attach the RED lead to battery +12V and BLACK lead directly to battery ground.
- **4.** Reconnect the negative battery terminal and test switches to verify functionality.
- 5. Your installation is now complete!

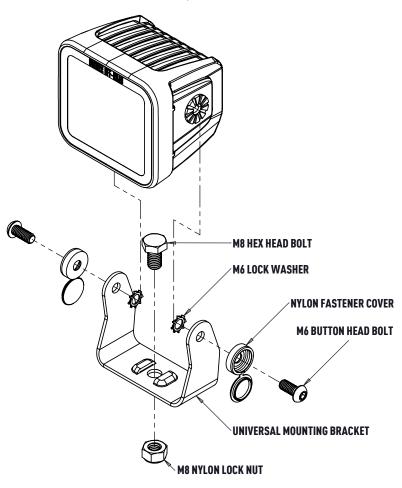

Continued on next page

LIGHT BARS		
DESCRIPTION	QUANTITY	
M8 Lock Washers	2	
M8 Button Head Bolts	2	
Nylon Fastener Covers	2	
M8 Hex Head Bolts	2	
M8 Nylon Lock Nuts	2	
Universal Mounting Brackets	2	
Universal Harness Pigtail	1	
Black Light Cover	1	

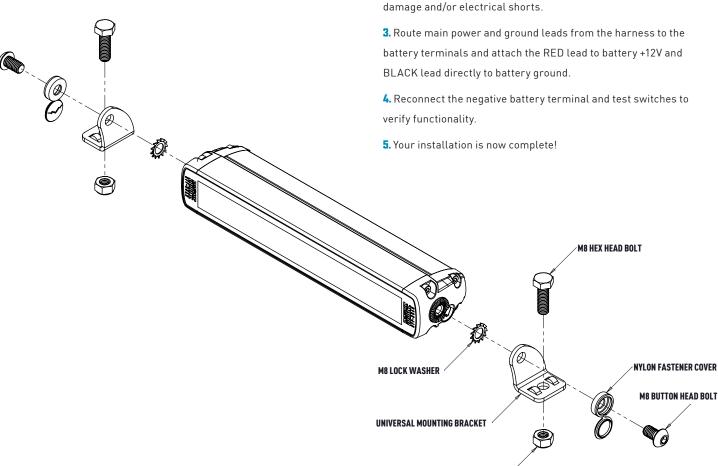

# MOUNTING INSTALLATION INSTRUCTIONS

- 1. Insert mounting brackets onto light as shown.
- **2.** Secure hardware to a snug position and mount your light in desired location.


# WIRING HARNESS INSTALLATION INSTRUCTIONS

- **1.** Always disconnect the negative battery terminal when working with any electrical circuits.
- **2.** When routing wires through any metal or abrasive surfaces, ensure the surface is free of any sharp edges to prevent wire damage and/or electrical shorts.

M8 NYLON LOCK NUT

ROUND LIGHTS		
DESCRIPTION	QUANTITY	
M6 Lock Washers	8	
M6 Button Head Bolts	8	
M10 Bolts	2	
M10 Nylon Lock Nuts	2	
M6 Flat Washers	8	
Universal Mounting Brackets	2	
Universal Wiring Harness	1	
Black Light Covers	2	

Round Lights Come Pre-Assembled

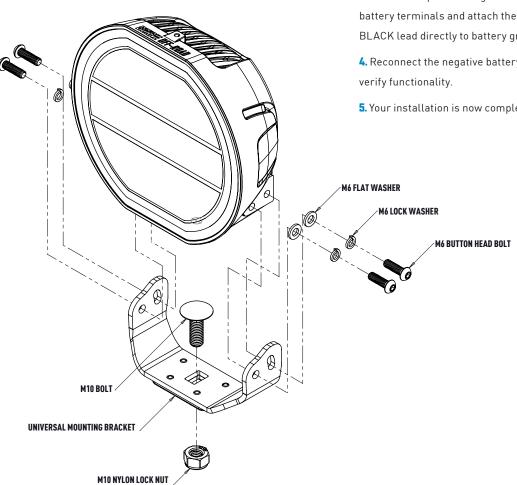

### **MOUNTING INSTALLATION INSTRUCTIONS**

- 1. Insert mounting brackets onto light as shown.
- 2. Secure hardware to a snug position and mount your light in desired location.

### WIRING HARNESS INSTALLATION **INSTRUCTIONS**

- 1. Always disconnect the negative battery terminal when working with any electrical circuits.
- 2. When routing wires through any metal or abrasive surfaces, ensure the surface is free of any sharp edges to prevent wire damage and/or electrical shorts.
- 3. Route main power and ground leads from the harness to the battery terminals and attach the RED lead to battery +12V and BLACK lead directly to battery ground.
- 4. Reconnect the negative battery terminal and test switches to
- 5. Your installation is now complete!

# ROCK LIGHTS DESCRIPTION QUANTITY Flat Mounting Pads 4 Curved Mounting Pads 4 Short Jumper Harnesses 2 Long Jumper Harnesses 2 Universal Wiring Harness 1

# MOUNTING INSTALLATION INSTRUCTIONS

**1.** Secure hardware to a snug position and mount your light in desired location.

## WIRING HARNESS INSTALLATION INSTRUCTIONS

- **1.** Always disconnect the negative battery terminal when working with any electrical circuits.
- **2.** When routing wires through any metal or abrasive surfaces, ensure the surface is free of any sharp edges to prevent wire damage and/or electrical shorts.
- 3. Route main power and ground leads from the harness to the battery terminals and attach the RED lead to battery +12V and BLACK lead directly to battery ground.
- **4.** Reconnect the negative battery terminal and test switches to verify functionality.
- 5. Your installation is now complete!