



# INSTALLATION GUIDE


**Capable Bumper License Plate Relocation Kit Fits 2022+ Ford Bronco**  
**SKU: MMLP-BR-22C**

## TABLE OF CONTENTS

- Pg 1** RESOURCES AND CONTACT INFORMATION
- Pg 2** EXPLODED VIEW & DISCLAIMER
- Pg 3** IMPORTANT SAFETY INFORMATION  
REQUIRED TOOLS  
INSTALLATION INSTRUCTIONS
- Pg 5** DISPOSAL INSTRUCTIONS  
WARRANTY INFORMATION

## RESOURCES & CONTACT

-  **CALL 1-877-GOMISHI**  
CUSTOMER SERVICE HOURS: MON-FRI 8:30AM-5:00PM EST
-  **MISHIMOTO**
-  **GOMISHIMOTO**
-  **MISHIMOTO**
-  **WEBSITE**  
[WWW.MISHIMOTO.COM](http://WWW.MISHIMOTO.COM)
-  **ENGINEERING BLOG**  
[WWW.MISHIMOTO.COM/ENGINEERING](http://WWW.MISHIMOTO.COM/ENGINEERING)

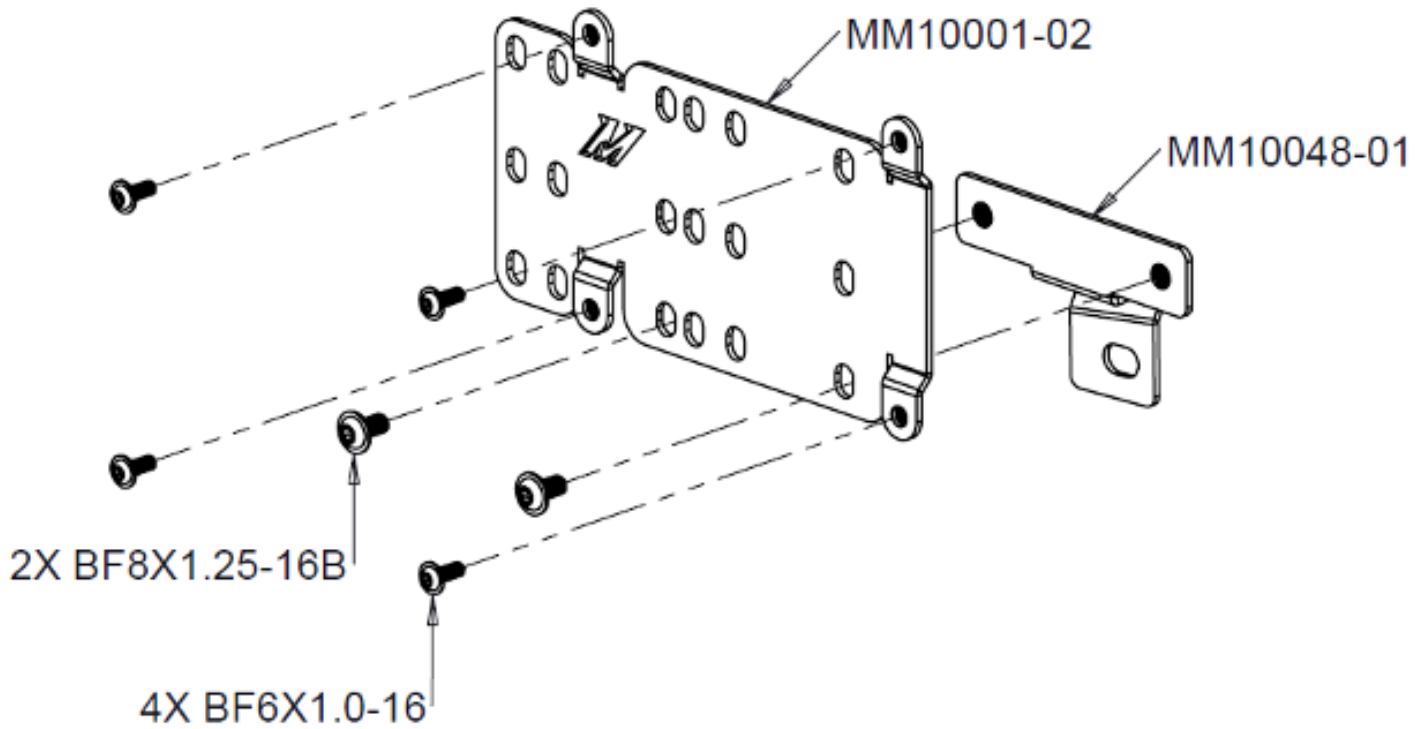

## DISCLAIMER

> This license plate has a wide range of adjustability for maximum compatibility with a variety of accessories. Some positions may interfere with parking sensors in the front bumper, please be aware of this before operating the vehicle

## PARTS BREAKDOWN

PART NUMBER	DESCRIPTION	QTY
MM1048-01	BRACKET 1	1
MM10001-02	BRACKET 2	1
BF6X1.0-16	M6 BOLT	4
BF8X1.25-16B	M8 BOLT	2

## IMPORTANT SAFETY INFORMATION

- › Mishimoto recommends you use safety glasses and protective gloves during the installation of our products
- › Raise vehicle only on jack stands or on a vehicle lift
- › Allow vehicle to cool completely prior to attempting installation
- › Do not run the engine or drive the vehicle while overheating; serious damage can occur
- › Please dispose of any liquids properly
- › Mishimoto is not responsible for any vehicle damage or personal injury due to installation errors, misuse, or removal of Mishimoto products
- › If you need any assistance while installing our products, reach out to our Customer Service Team at 1-877-GOMISHI

## REQUIRED TOOLS

3/8" DRIVE RATCHET AND EXTENSION	LEVEL
15MM SOCKET	FILE
3/8" DRIVE TORQUE WRENCH	SANDPAPER
4MM ALLEN WRENCH	MASKING TAPE
5MM ALLEN WRENCH	MARKER


**INSTALL TIME: 45 MINUTES**

**INSTALL DIFFICULTY:** 

## INSTALLATION INSTRUCTIONS

1. Remove the passenger-side front bumper trim panel by pulling outward to release it from the bumper.
2. Remove the outermost 15mm bolt from the front bumper.
3. Fasten the MM10048-01 bracket to front bumper using the 15mm bolt removed in the previous step. Push the bracket upwards so that it fits tightly against the bumper. Torque the bolt to 81 lb/ft.


(Image on top right)

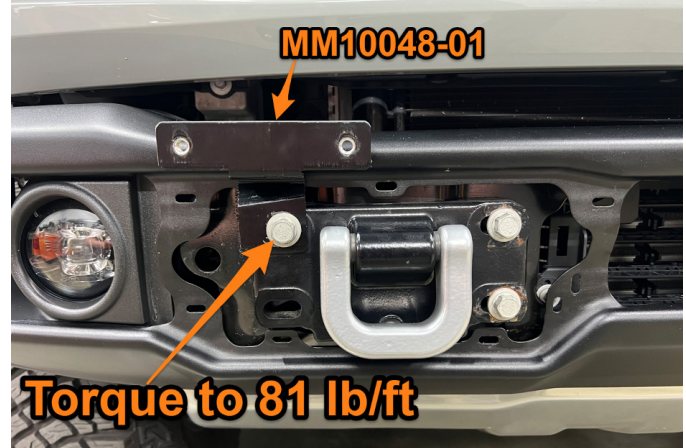

4. Reinstall the front bumper trim panel. Apply a strip of masking tape to the upper face of the trim panel as shown in the image above. Using a marker, add marks to the tape to indicate the location of the bracket on the trim panel.




5. Remove the trim panel from the bumper and transfer the markings to the back side as shown. Using a file and sandpaper, trim the marked area.

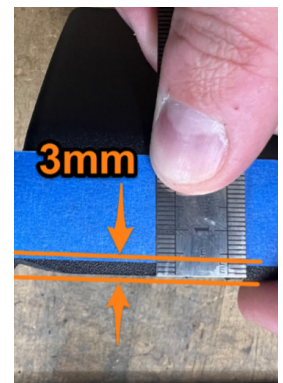



6. After trimming, the trim panel should resemble what is shown in the below images.

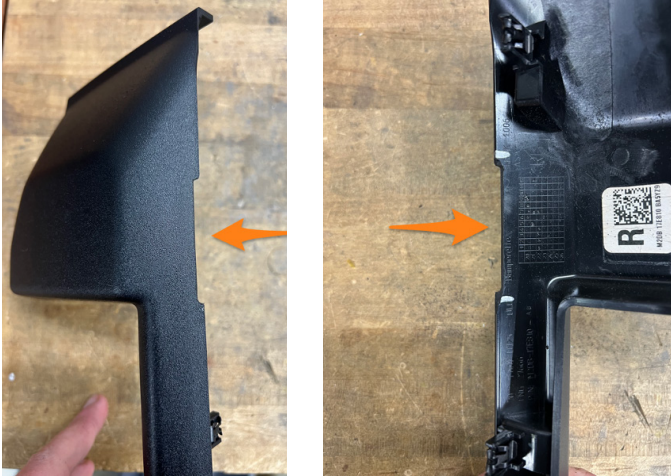

7. Reinstall the trim panel.



8. Fasten MM10001-02 to MM10048-01 in the desired orientation using the provided M8 bolts. A level should be used to ensure a nice, clean installation.



9. Fasten the front license plate to MM10001-02 with the provided M6 bolts.



**Congratulations! You have finished your installation.**

## DISPOSAL INSTRUCTIONS

- › Do not dispose of any product as unsorted municipal waste. Use separate collection facilities. Contact your local authority for information regarding the collection systems available.
- › Never improperly dispose of any coolant, oil, or other chemicals.

## WARRANTY INFORMATION



- › All claims must be accompanied with a picture of the Mishimoto product showing the issue for which the claim is being submitted.
- › Mishimoto asks that the customer inspect their purchased item for any damage immediately upon arrival.
- › Any product deemed dead on arrival (DOA) must be claimed within 14 business days of delivery. Claims outside of this time frame will not be covered under the Mishimoto Lifetime Warranty.
- › This warranty does not include payment and/or reimbursement of the cost of labor in connection with the removal of any product returned pursuant to the warranty policy or in connection with the installation of any replacement items provided under the warranty policy.
- › Mishimoto has the right to refuse a claim at any time.

- › When Mishimoto accepts a claim, Mishimoto retains full discretion to choose if it will: (i) repair or replace purchaser's original Mishimoto product; (ii) replace purchaser's original Mishimoto product with the most current available model; or (iii) provide the purchaser with a gift card redeemable on [Mishimoto.com](https://www.mishimoto.com) in the amount of the original purchase price of the original Mishimoto product. The provision of a replacement of a Mishimoto product is subject to availability and Mishimoto retains the right to substitute any warranty claim item with a comparable item or credit at any time.
- › If Mishimoto determines that it will provide a replacement item in connection with a claim under this warranty policy, and such item is out of stock, Mishimoto will place the customer on backorder and ship the replacement product to the purchaser once it becomes available.
- › Mishimoto is not liable for incorrect shipments in connection with a claim if a claim form is completed incorrectly, or if a model number is not included in a claim.
- › If you have a vehicle equipped with an automatic transmission, please make sure to specify this within the text box on the claim form. Mishimoto is not responsible for incorrect replacement shipments if transmission type is not indicated.



**WARNING**  
Cancer and  
Reproductive Harm  
[www.P65Warnings.ca.gov](https://www.P65Warnings.ca.gov)

This product can expose you to chemicals which are known to the state of California to cause cancer. For more information visit: [www.p65warnings.ca.gov](https://www.p65warnings.ca.gov)