

IMF105



2024+ Subaru Impreza Mud Flap Installation Instructions














Manufacturer warranty covers material defects on new, never installed parts. Once installed, all mud flap replacement part costs are the responsibility of the vehicle owner. Caution against blind spots during parking. Avoid curbs and excessive compression to the flaps. Check stock and aftermarket wheel/suspension clearances.

INSTALLATION QUESTION? FOR REPLACEMENT PART QUOTES, SEND FLAP RECEIPT OR PHOTO → www.rallyarmor.com/support

Recommended Tools Low-profile offset, ratcheting, flat & Phillips screwdrivers, pick.

ONLY install on even surface using hand tools, not powered tools. AVOID OVERTIGHTENING HARDWARE.

ABOUT OUR STANDARD IN MUD FLAPS Polyurethane is a high grade plastic that may feature minor surface layer marks. These are visual variations that don't affect flap construction or performance. Most matte away as the material ages naturally.

MF105 KIT CONTENTS CONFIRM ALL PARTS AND QUANTITIES BEFORE INSTALLATION			
MUD FLAP KIT PN: MF105	SEE PAGE 4 DRAWINGS	PART DESCRIPTION	QUANTITY
MF105-LF		LEFT FRONT	1
MF105-RF		RIGHT FRONT	1
MF105-LR		LEFT REAR	1
MF105-RR		RIGHT REAR	1
BRACKET KIT PN: BMF105 SEE PG 4			
BMF45-FRT		BRACKET FRONT	2
BMF105-LR		BRACKET LEFT REAR	1
BMF105-RR		BRACKET RIGHT REAR	1
HARDWARE KIT PN: HMF105 SEE PG 4			
1SS		SCREW	2
1SS#8		THIN SCREW	4
1.5SS		LONG SCREW	6
EXPANCH		EXPANSION ANCHOR	4
POLCLP		CLIP	2
SCLP		S CLIP	6
SMWASH		WASHER	16
SSLNUT		LOCK NUT	4

2024+ Subaru Impreza Mud Flap Installation Instructions

FRONT FLAP

To access interior wheel well, turn steering wheel towards installation side. Do not fully tighten fasteners until flap is fully aligned to vehicle. **Bracket/Hardware 1 x Flap → 1 x BMF45-FRT; 1 x 1SS; 3 x 1.5SS; 1 x POLCLP; 3 x SCLP; 4 x SMWASH**

FIGURE A If equipped, uninstall factory splash guards. Remove fasteners 1 – 3. Located under side skirt, remove and retain fastener 4.

FIGURE B Pull liner away to place SCLP over mounts 1 - 3. Reinstall liner and fastener 4.

FIGURE C To enhance clearance between tire & flap, subtly curve bottom of BMF45-FRT towards rear bumper. Place POLCLP over bottom mount.


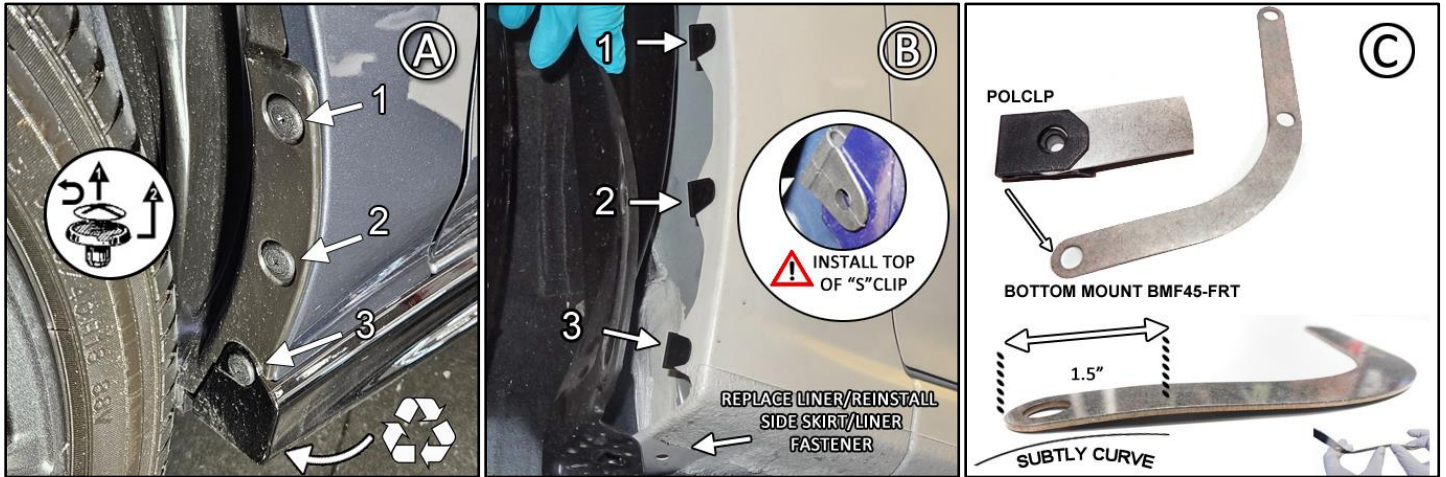


FIGURE D On side skirt equipped vehicles, mount BMF45-FRT under skirt, ensuring mounts 2 & 3 are visible through skirt.

FIGURE E/F Install SMWASH & 1.5SS through mounts 1 – 3 and SMWASH & 1SS on mount 4. Align flaps to even ground before tightening fasteners until washers just seat against flap.

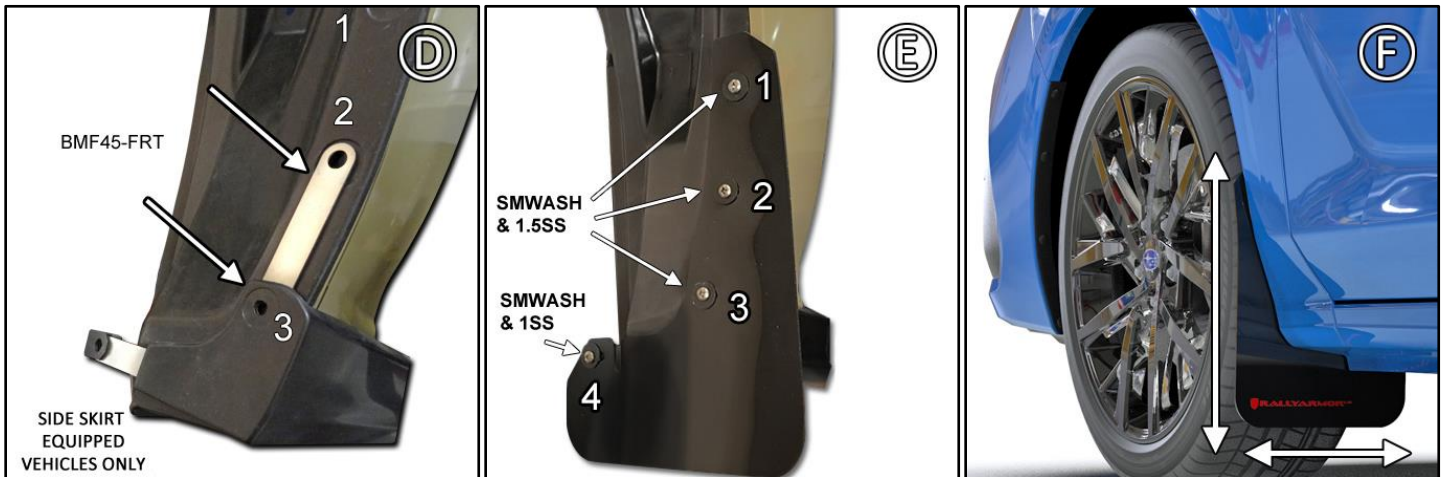

2024+ Subaru Impreza Mud Flap Installation Instructions

REAR FLAP Do not fully tighten fasteners until flap is fully aligned to vehicle.

Bracket/Hardware 1 x Flap → 1 x BMF105-LR/RR; 2 x 1SS#8; 2 x EXPANCH; 4 x SMWASH; 2 x SSLNUT

FIGURE G/H/I To access rear bumper mounts, temporarily uninstall fasteners & portion of liner covering rear bumper.



FIGURE J/K Install EXPANCH over mounts 1 & 2. TIP: You can secure EXPANCH with a small piece of tape to ease reinstallation of liner. Reinstall liner as shown. Use a pick or awl to ensure EXPANCH are visible through liner mounts.

FIGURE L/M Install BMF105-LR/RR between bumper & liner, aligning mounts over EXPANCH 1 & 2. Place logo-side of flap facing vehicle rear against liner mounts 1 & 2, then install SMWASH & 1SS#8.

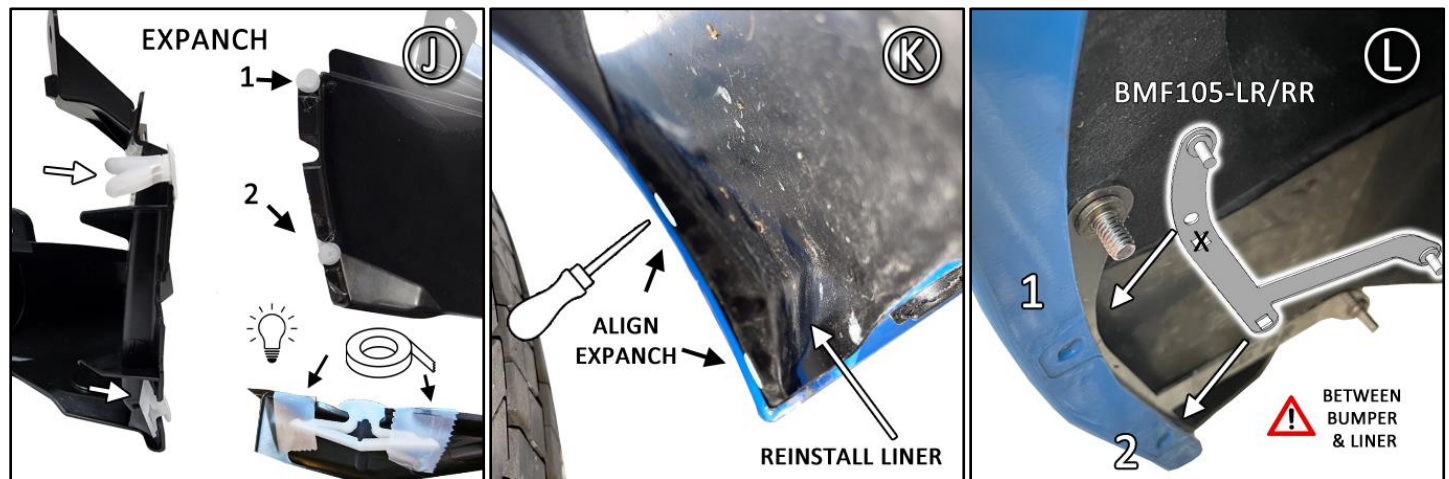


FIGURE N Install SMWASH & SSLNUT through mounts 3 & 4.

2024+ Subaru Impreza Mud Flap Installation Instructions

FIGURE O Align flaps to even ground before tightening fasteners until washers just seat against flap.

