

#### 2022+ Honda Civic & Sport Mud Flap Installation Instructions

#### Does not fit CIVIC TYPE R

View instructions and photos online

<u>CARE AFTER INSTALLATION</u> Once installed, vehicle owner is responsible for condition of mud flaps and all costs associated with replacing damaged or lost parts. Warranty covers manufacturer defect on new, never installed parts.


Watch for blind spots when parking Avoid contact with curbs and objects that compress flaps with excessive force. Check wheel clearances, especially on vehicles equipped with aftermarket wheels and suspensions.

QUESTION ON INSTALLATION? CONTACT www.rallyarmor.com/support

NEED TO PURCHASE REPLACEMENT PARTS? SEND RECEIPT OR PHOTO OF MUD FLAPS TO www.railyarmor.com/support

### **IMPORTANT NOTES** ALWAYS USE ALWAYS TEST COMPATIBILITY **CAUTION DURING** WITH YOUR SPECIFIC WHEEL, PARKING/REVERSAL TIRE AND SUSPENSION **SCENARIOS** COMBINATION ALWAYS ALIGN YOUR MUD CLEANING INSTRUCTIONS: FLAP PERPENDICULAR TO USE WATER AND SOFT CLOTH GROUND PRIOR TO TIGHTENING TO CLEAN FLAPS. AVOID SOLVENT BASED CLEANERS

#### **INSTALLATION KIT CONTENTS** QUANTITY **PART** ITEM ID 2 **SPACER** 1SP 10 **SCREW 1SS** 2 LONG SCREW **2SS** 10 **INSERT** INS7 18 WASHER **SMWASH** 1 **BRACKET LEFT REAR** BMF90-LR 1 **BRACKET RIGHT REAR** BMF90-RR



**Recommended Tools** Low-profile offset or ratcheting screwdriver, flathead screwdriver, needle nose pliers (optional). **Important Tips** Installation should be done on even surface. Do not use drill to tighten hardware. Hand tools only. Avoid overtightening.

#### **RALLY ARMOR - A BIT ABOUT OUR STANDARD IN MUD FLAPS**

Rally Armor mud flaps are fabricated from a high grade polyurethane plastic that is rigorously reviewed for quality and consistency. As with all manufacturing processes, controlled conditions and multiple QC checkpoints minimize major irregularities, however certain very minor surface layer marks appear periodically. These are visual variations that do not affect construction nor do they impede the performance of the flaps. Most matte away as the material ages naturally with continued exposure to the outdoors. Each flap is unique in appearance yet all are structurally sound.

2.12.2022 VERSION 1



Setting the standard in mud flaps®

### 2022+ Honda Civic & Sport Mud Flap Installation Instructions


Does not fit CIVIC TYPE R

## FRONT MUD FLAP | Hardware 1 x Front Flap → 2 x 1SS; 1 x 2SS; 4 x SMWASH; 1 x 1SP - OPTIONAL 2 x INS7

To gain access inner wheel well area, turn steering wheel towards installation side.

**FIGURE A** If vehicle is equipped with factory splash guards, remove prior to installing mud flaps. Remove screws 1 – 4, retaining 1 & 2. **FIGURE B** On vehicles without factory splash guards or original screws 1 & 2 are damaged, install INS7 in place of 1 and 2. Otherwise, reinstall factory screws.

FIGURE C Install 1SP behind mud flap over mount 4.

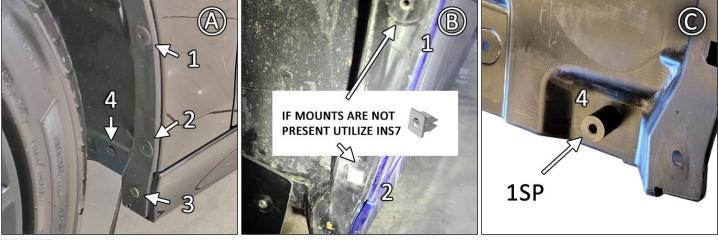

**FIGURE D** Position logo-side of flap facing rear of vehicle against liner mounts. Fasten 1SS and SMWASH to mounts 1 & 2, factory screw and SMWASH on point 3. For mount 4, install 2SS, SMWASH and SPACER **behind** mud flap.

FIGURE E/F Check tire clearance then ensure mud flap is parallel to even ground. Hand tighten until washers are seated to flap.







2.12.2022 VERSION 1



### 2022+ Honda Civic & Sport Mud Flap Installation Instructions

Does not fit CIVIC TYPE R

### REAR MUD FLAP Bracket & Hardware 1 x Rear Flap > BMF90-LR/RR; 3 x 1SS; 3 x INS7; 5 x SMWASH

FIGURE G/H Remove and retain liner screws 1, 2 and underbody bumper screw 3.


**FIGURE I** Press INS7 into the 3 BMF90-LR/RR square mounting points. To help seat INS7 flush against bracket, compress stem side of INSERT with needle nose pliers.



**FIGURE J** Position BMF90-RR/LR bracket behind bumper, over liner. Align upper mounts 1 and 2 on bracket to bumper mounting holes. Install original screw to mount 6.

**FIGURE K** Place logo-side of flap facing rear of vehicle against liner and bracket mounting points. Fasten original screw and SMWASH to points 1 & 2. Use 1SS and SMWASH for mounts 3 – 5.

FIGURE L Check tire clearance then ensure mud flap is parallel to even ground. Hand tighten until washers are seated to flap.

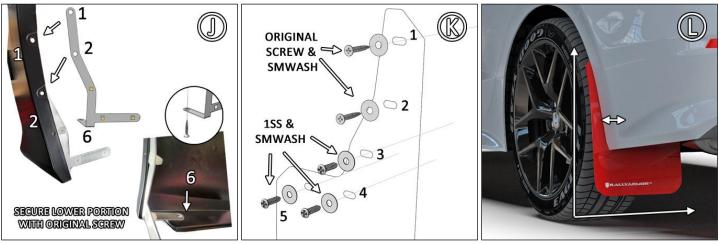

3 2.12.2022 VERSION 1

#### IMF90



# 2022+ Honda Civic & Sport Mud Flap Installation Instructions Does not fit CIVIC TYPE R

