

# ROUGH COUNTRY

## SUSPENSION SYSTEMS®

### FORD 2021-22 F-150 Tremor 4" Lift Kit

THANK YOU FOR CHOOSING ROUGH COUNTRY FOR YOUR SUSPENSION NEEDS.

Rough Country recommends a certified technician install this system. In addition to these instructions, professional knowledge of disassemble/reassembly procedures as well as post installation checks must be known. Attempts to install this system without this knowledge and expertise may jeopardize the integrity and/or operating safety of the vehicle.

Please read instructions before beginning installation. Check the kit hardware against the parts list. Be sure you have all needed parts and know where they go. Also please review tools needed list and make sure you have needed tools.

#### PRODUCT USE INFORMATION

**▲ WARNING** The taller a vehicle is, the easier it will roll. We strongly recommend, because of rollover possibility that seat belts and shoulder harnesses should be worn at all times. Avoid situations where a side rollover may occur.

**▲ WARNING** Generally, braking performance and capability are decreased when larger/heavier tires and wheels are used. Take this into consideration while driving. Do not add, alter, or fabricate any factory or after-market parts to increase vehicle height over the intended height of the Rough Country product purchased. Mixing component brands is not recommended.

Rough Country makes no claims regarding lifting devices and excludes any and all implied claims. We will not be responsible for any product that is altered. If questions exist we will be happy to answer them concerning the design, function, and correct use of our products.

The 4" suspension system was developed using a 35X12.50/20 tire with 20 x 9 wheel with 6mm offset. The lifts were designed to lift the front to level the vehicle. Due to manufacturing, dimension variances, and inflation all tire and wheel combinations should be tested prior to installation on all oversized / wider than stock tires. We recommend using a 20" minimum wheel with corresponding tire, 9" in width with an offset of 6mm.

**▲ NOTICE** Vehicles will require the EPAS (Electronic Power Assist Steering) plugs to be disconnected prior to beginning installation of this kit. See installation instructions. Failure to disconnect these plugs may result in damage to the EPAS module resulting in an error message being displayed, which will require replacement of the EPAS module

#### ▲ NOTICE DEALER AND VEHICLE OWNER

Any vehicle equipped with any Rough Country product should have a "Warning to Driver" decal installed on the inside of the windshield or on the vehicle's dash. The decal should act as a constant reminder for whoever is operating the vehicle of its unique handling characteristics.

#### Tools Needed:

5mm Allen Wrench	Floor Jack
8mm Allen Wrench	Jack stands
8mm wrench /socket	Reciprocating Saw
10mm wrench /socket	Hammer
12mm Wrench	9/16 wrench /socket
13mm wrench / socket	1 1/16" Wrench
15mm wrench /socket	Drill
16mm wrench /socket	1/4" Drill Bit
18mm wrench /socket	5/8" Drill Bit
19mm wrench /socket	11/32" Drill Bit
21mm wrench /socket	Torque Wrench
22mm wrench /socket	
24mm wrench /socket	
30mm wrench /socket	

#### Torque Specs:

Size	Grade 5	Grade 8
5/16"	15 ft/lbs	20 ft/lbs
3/8"	30 ft/lbs	35 ft/lbs
7/16"	45 ft/lbs	60 ft/lbs
1/2"	65 ft/lbs	90 ft/lbs
9/16"	95 ft/lbs	130 ft/lbs
5/8"	135 ft/lbs	175 ft/lbs
3/4"	185 ft/lbs	280 ft/lbs
	Class 8.8	Class 10.9
6MM	5 ft/lbs	9 ft/lbs
8MM	18ft/lbs	23 ft/lbs
10MM	32ft/lbs	45ft/lbs
12MM	55ft/lbs	75ft/lbs
14MM	85ft/lbs	120ft/lbs
16MM	130ft/lbs	165ft/lbs



**4" KIT CONTENTS**

**40730 (4" Kit w/ N3 Shocks):**

40730BOX3  
40730BOX5  
555BOX3  
40730BOX1  
587BOX2  
23165

**40770 (4" Kit w/ V2 Rr Shocks):**

40730BOX3  
40730BOX5  
555BOX3  
40730BOX1  
587BOX2  
760751



## KIT CONTENTS

### 40730BOX3

U-Bolts x4  
9/16BAG  
3" Dual Pin Block x2

### 40730BOX5

1557BAG15 x1  
1557BAG8 x1  
40730BAG1 x1  
587BAG1 x1  
Cam Bolt Set x4  
Front Diff Bracket x1  
Dr Rear Diff Mount x1  
Front Pass Diff Bracket x1  
Pass Diff Brace x1  
Driver Sway Brar Drop x1  
Pass Sway Bar Drop x1  
Sway Bar Drop Bracket Badge x2  
Front Skid Plate x1

### 555BOX3

4" Strut Spacer x2  
10mmStudbag-2

### 40730BOX1

Tremor Front Crossmember x1  
Tremor Rear Crossmember x1

### 587BOX2

Driver Knuckle x1  
Pass Knuckle x1

### 23165

N3 660751 x2

### 760751

V2 Shocks x2

### 1557Bag15 Containing:

#### **For Pass Diff Brace:**

12mm x35mm x2  
12mm Lock Nut x2  
Flat Washers x4

### 1557Bag8 Containing:

#### **For Fr Dr Side Upper Diff Mount:**

3/4 Flat Washer x4  
1/2" Nylock Nut x1  
18mm-2.5 Nylock Nut x2  
9/16-12 Nylock Nut x3  
1/2-13 x1.5 Hex Head Nut x1  
9/16-12 x4 Hex Bolt x3  
18mm-2.5 x150 x2  
9/16 Flat Washer x6  
1/2" Flat Washer x2

### 40730BAG1 Containing:

#### **For Rear Bump Stop:**

10mm-1.5 x 60mm Bolts x2  
Bump Stop x2

### 587BAG1

3/8" Washer x9  
3/8-16 x1" Hex Head Bolts x6  
3/8-16 Nylock Nuts x3  
5/16 Flat Washer x4  
5/16-18 x3/4 Hex Head Bolts x2  
5/16-18 Nylock Nuts x2  
5/16" Vent Hoes Coupler x1  
5/16 x4" Vent Hoes x1  
7/16-14 x1.25 Hex Head Bolt x4  
7/16-14 Nylock Nut x4  
#8-32 x1/2 SS Button Head Bolt x 4  
#8-32 SS Lock Nut x4  
Brake Line Bracket x2

### 10mmStudBag Containing:

#### **For Front Strut Spacers:**

10mm Studs x6  
10mm Lock Washer x6  
10mm Hex Nuts x7  
1/2" Jam Nut x1  
3/8" Flat Washers x6


### 9/16Bag:

#### **For Rear Blocks:**

9/16" Nuts x8  
9/16" Flat Washers x8



**4" N3 Kit Shown in Picture**

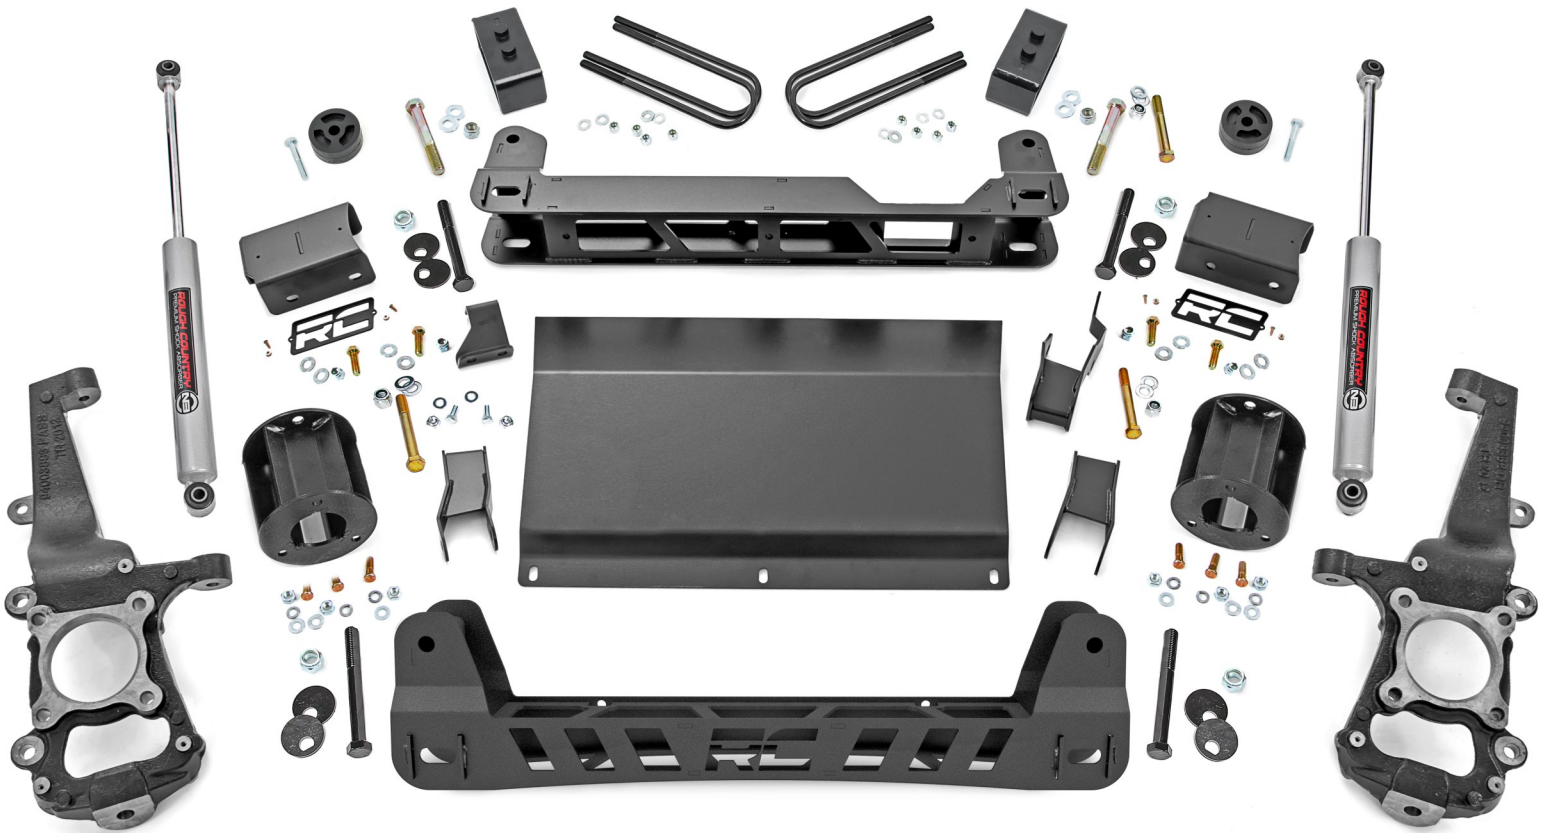



## INSTALLATION INSTRUCTIONS

1. Chock the rear wheels and jack up the front of the vehicle.
2. Place jack stands under the frame rails and lower onto jack stands.
3. Remove the wheels/tires using a 21mm socket.
4. Remove the skid plate with a 13mm socket. **See Photo 1.**
5. Remove the EPAS (Electronic Power Assist Steering) Plugs as shown located on the steering assembly by the front differential. **See Photo 2. This must be done BEFORE installation is started.**



PHOTO 1

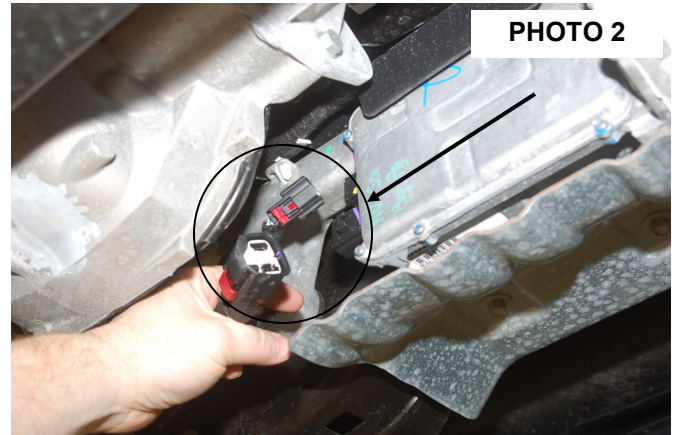


PHOTO 2

6. Remove tie-rod end using a 21mm wrench. Using the appropriate tool remove the tie-rod from the knuckle. **Photo 3.**
7. Remove the ABS and brake line bracket from the knuckle using a 8mm wrench for the ABS wire and a 10mm wrench for the brake line bracket. Retain hardware for reuse. **See Photo 4.**

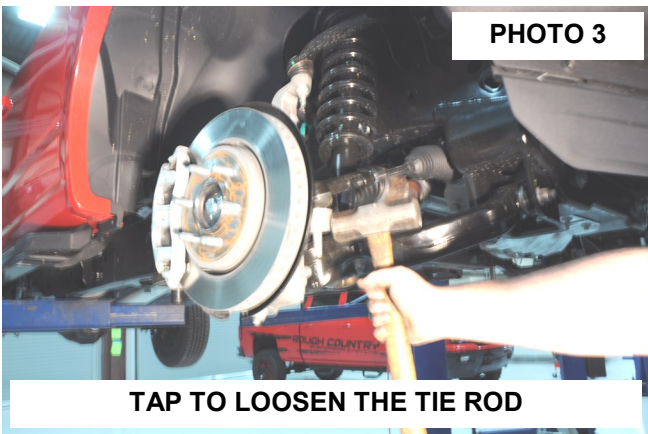


PHOTO 3

TAP TO LOOSEN THE TIE ROD

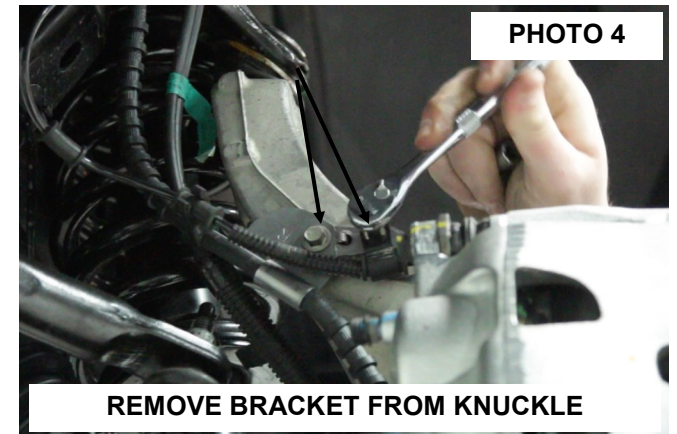


PHOTO 4

REMOVE BRACKET FROM KNUCKLE

8. Remove the vacuum line from the hub. **See Photo 5.**
9. Using a 19mm socket or 21mm socket, remove brake caliper as shown in **Photo 6.** Hang caliper out of way. Do not let caliper hang by brake hose as this will damage hose. Retain hardware for reuse. Remove rotor.

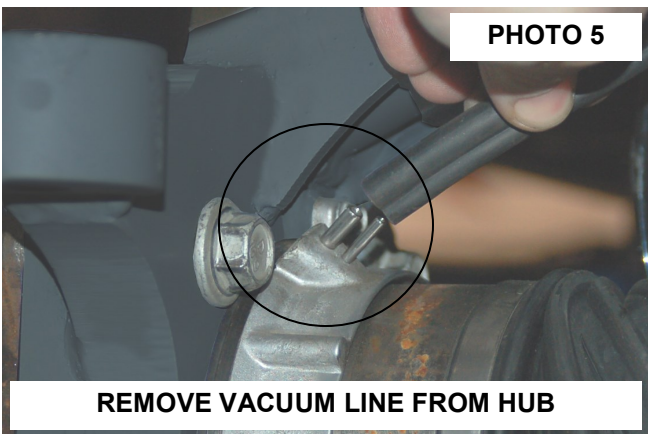


PHOTO 5

REMOVE VACUUM LINE FROM HUB



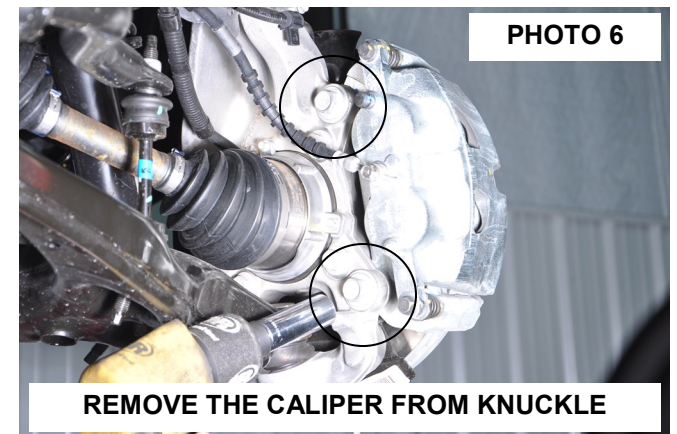


PHOTO 6



REMOVE THE CALIPER FROM KNUCKLE

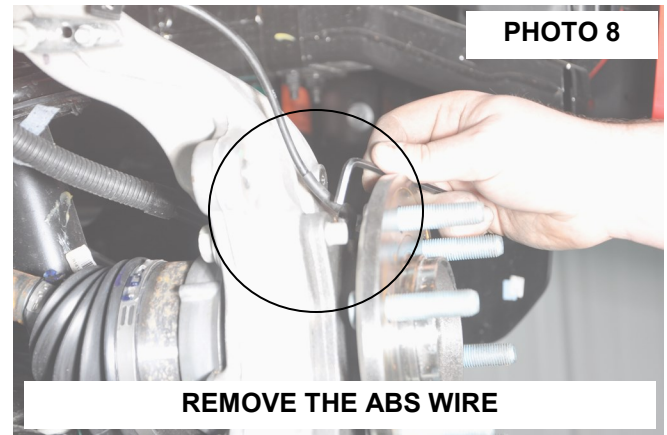



10. Remove the dust shield using a 8mm socket and dust cap. **See Photo 7.**  
11. Remove the ABS wire from the bearing assembly using a 5mm allen wrench. **See Photo 8.**

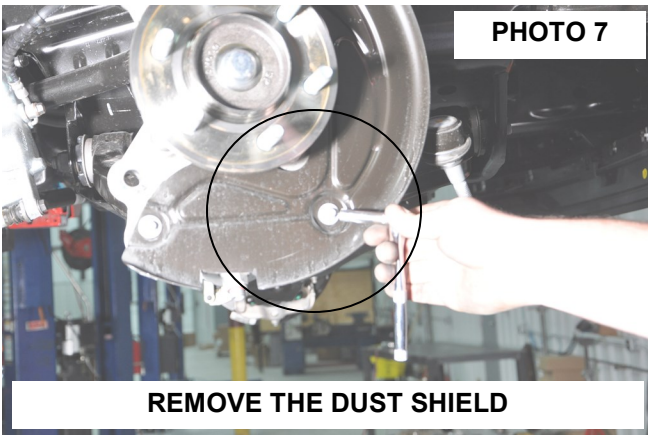

12. Remove the axle nut using a 15mm socket. Retain hardware for reuse. **See Photo 9.**  
13. Loosen the upper ball joint nut using a 21mm wrench. Use the appropriate tool to release ball joint from knuckle. **See Photo 10.**

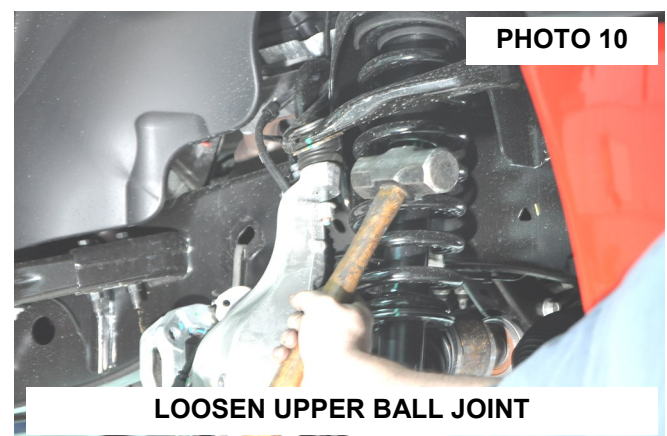
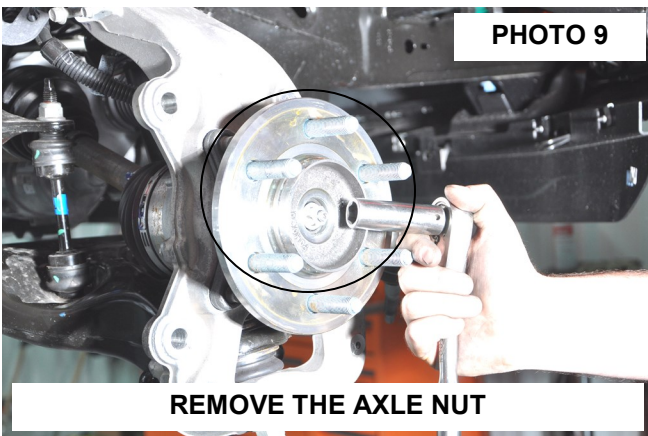


14. Loosen the lower ball joint using a 24mm wrench. Use the appropriate tool to release ball joint from knuckle. **See Photo 11.**  
15. Remove the upper and lower ball joint nuts and remove the knuckle from the vehicle.  
16. Remove the sway bar links from the sway bar using a 8mm and 19mm wrench. Retain hardware for reuse. **See Photo 12.**

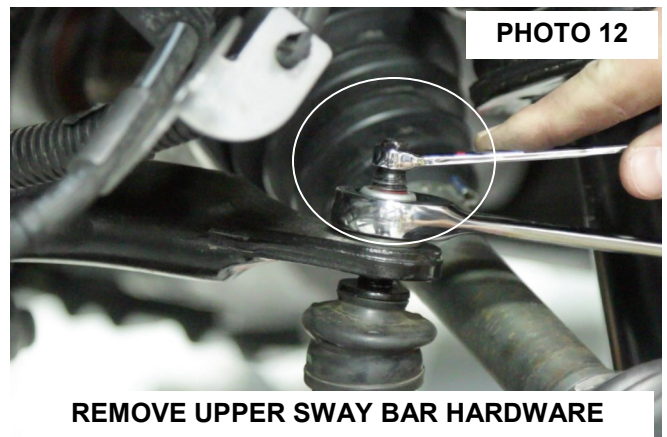
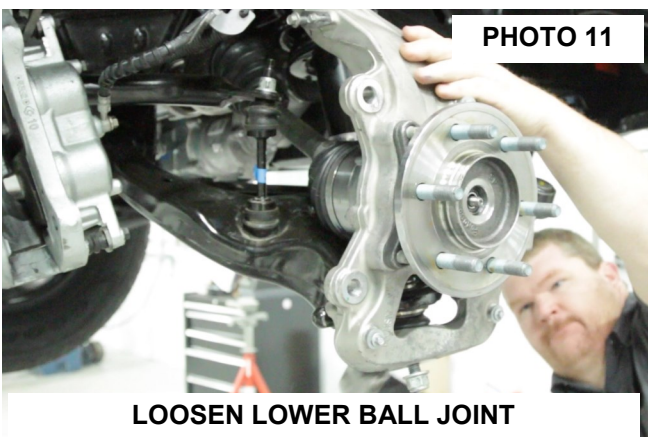






17. Remove the lower strut nuts using a 18mm socket. **See Photo 13.** Retain hardware for reuse.
18. Remove the sway bar from the frame mount using a 15mm socket. *Please note the position that the sway bar is installed from the factory to make sure it is reinstalled correctly.* Retain hardware for reuse. **See Photo 14.**

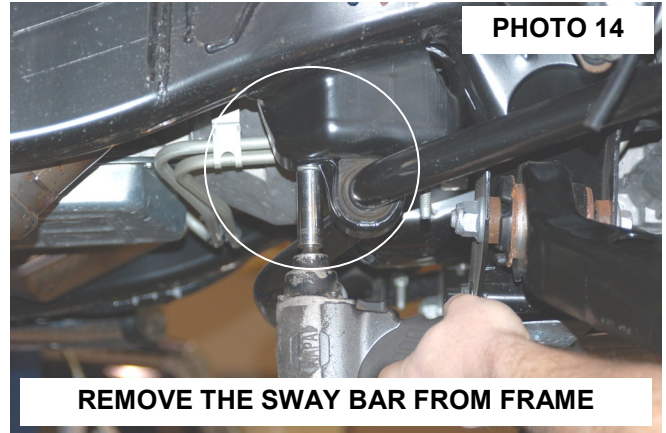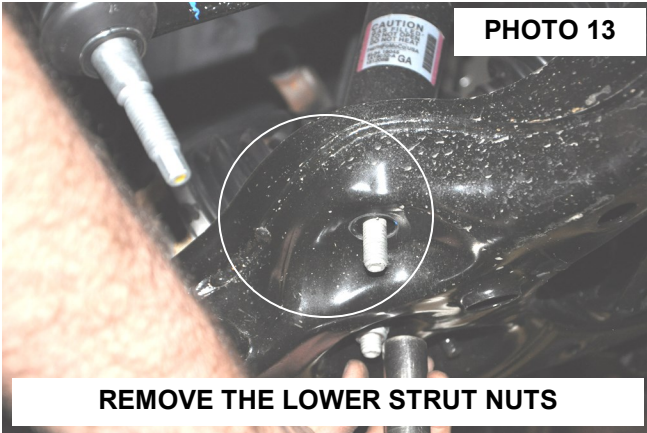

19. Remove the lower control arm using a 21mm and 1-1/16" wrench. Retain hardware for reuse. **See Photo 15.**
20. Remove the strut from the upper mount using a 15mm socket / wrench. Retain hardware for reuse. **See Photo 16.**

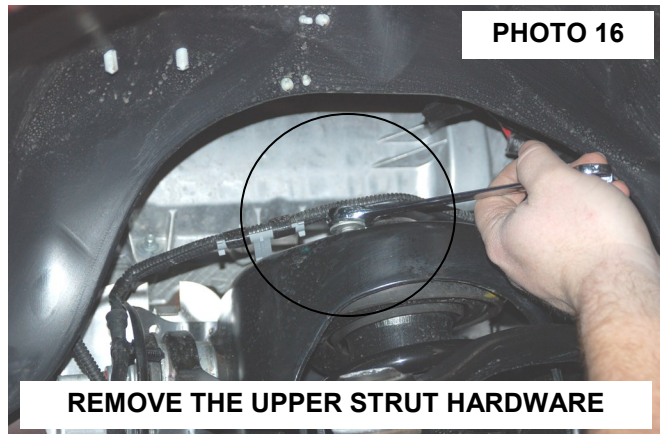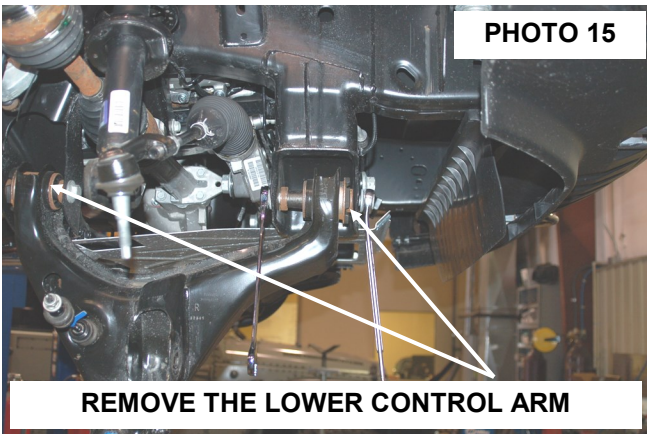

21. Remove the lower skid plate if equipped by removing the 4 bolts using a 13mm socket. **See Photo 17.**
22. Remove the driveshaft from the front differential using a 10mm socket. **See Photo 18.** Secure driveshaft out of the way.

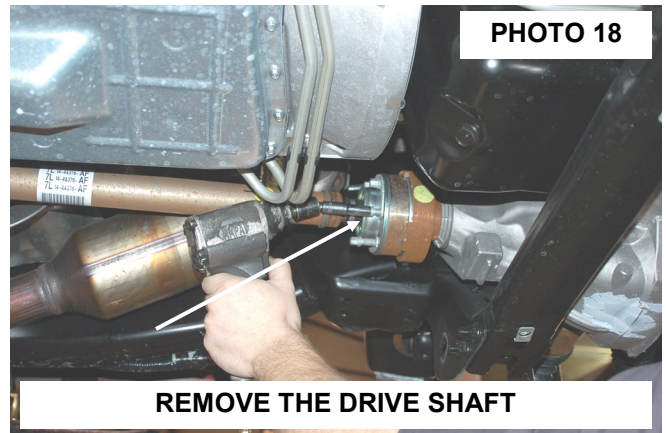
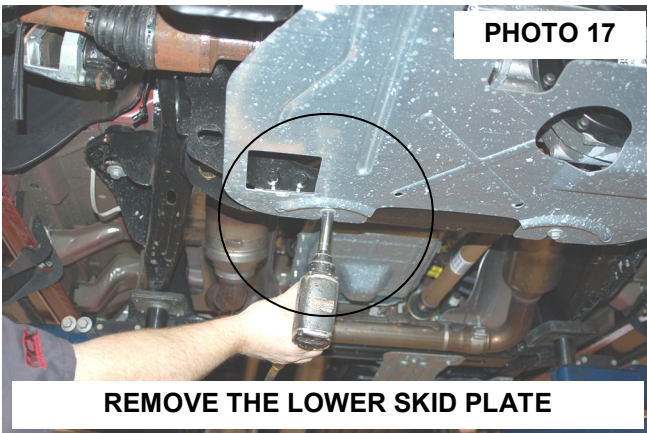




23. Remove the stock rear cross-member using a 15mm & 18mm socket. Retain hardware for reuse. **See Photo 19.**

**▲ NOTICE** 2018 Models will have to make rear crossmember mount cuts in steps 26-30 before removing the differential.



24. Support the differential using a floor jack and remove the upper driver side differential bolt using a 18mm wrench. Retain hardware for reuse. **See Photo 20.**

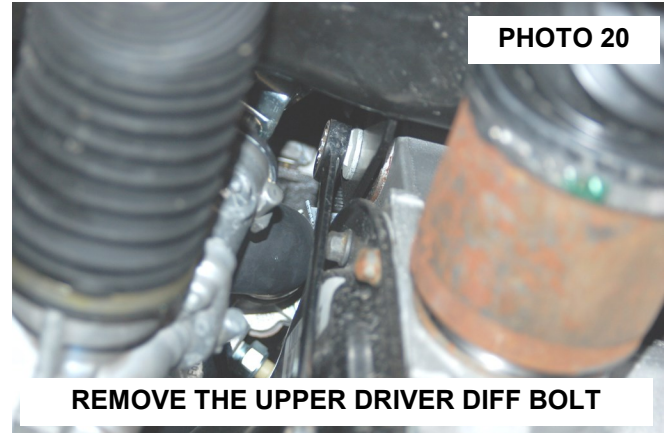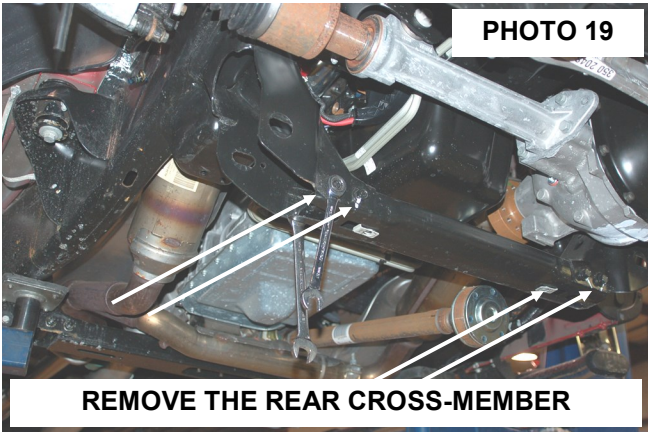

25. Remove the differential vent tube from the differential.

26. Remove the passenger side differential bolt using a 18 & 21mm wrench. Retain hardware for reuse. **See Photo 21.**

27. Remove the lower rear driver side differential bolt using a 21mm socket / wrench. Lower and remove the differential from the vehicle. Tape supplied cutting template on front and back side of the driver side lower cross-member mount. Using template as a guide, trim cross-member mount to allow the differential to be removed. **See Photo 22.**

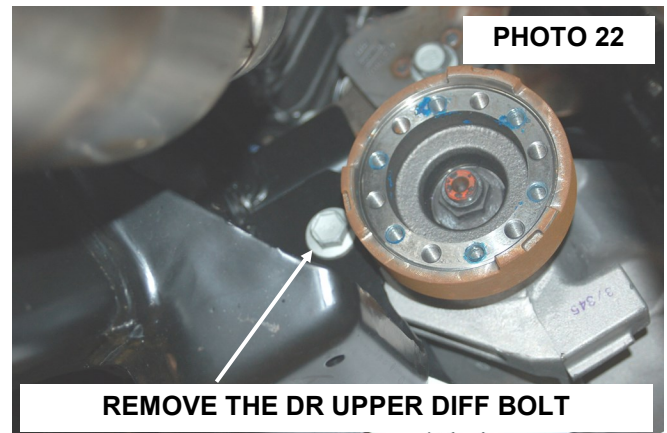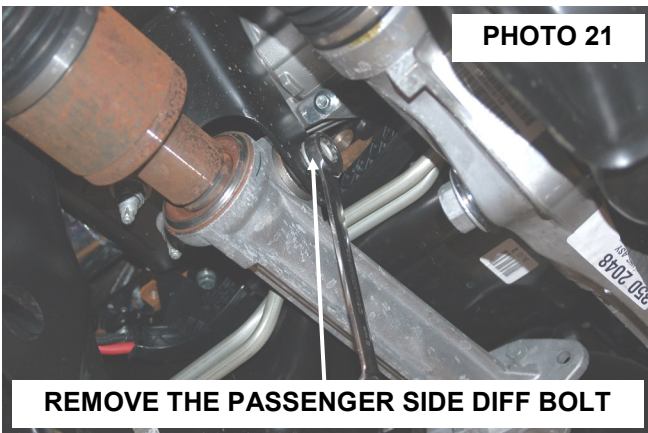


28. Tape supplied cutting template on front and back side of the driver side lower cross-member mount. Using template as a guide, trim cross-member mount to allow the differential to be removed. **See Photo 23.**

29. Complete the trimming of the frame on the driver side using the template. **See Photo 24.**



**PHOTO 23**





**PHOTO 24**

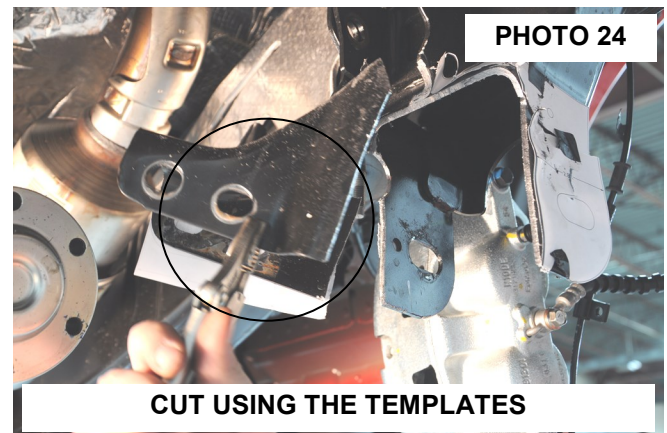



30. Install the new bracket on the passenger side diff mount with the supplied hardware. Install the 9/16" x 4" bolt, washers & nut in the in the passenger side mount. Do not tighten at this time. **See Photo 25.**
31. Install the front driver side diff mount with the supplied 9/16" x 4" bolt, washers and nut **from the front to rear.**  
**NOTE: The differential mount bolts will need to be inserted from the front of the differential in order to clear the rack and pinion. Do not tighten at this time. See Photo 26.**

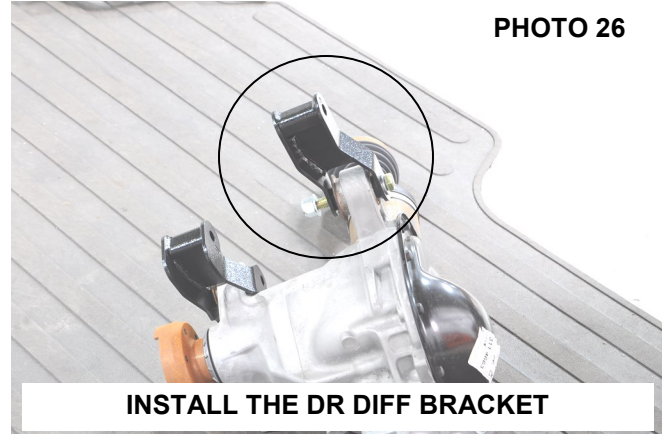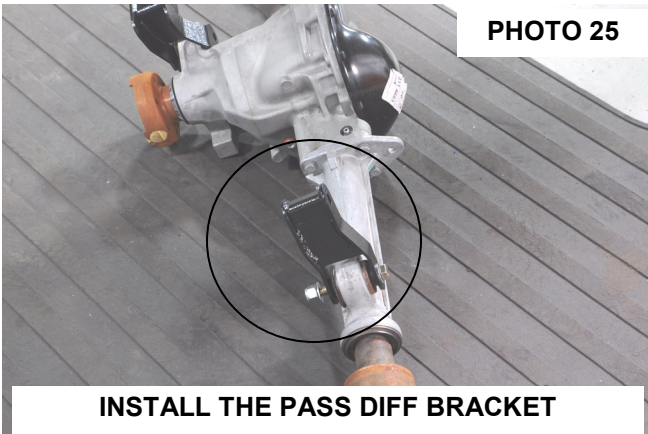

32. Install the rear diff mount using the supplied 9/16" x 4" hardware. Do not tighten at this time. **See Photo 27.**
33. Raise the differential into place and install the upper differential bolts using the stock hardware. **See Photo 28.** Do not tighten at this time.

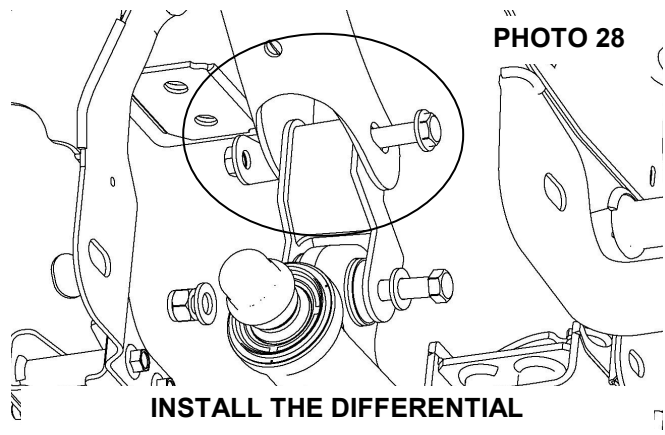
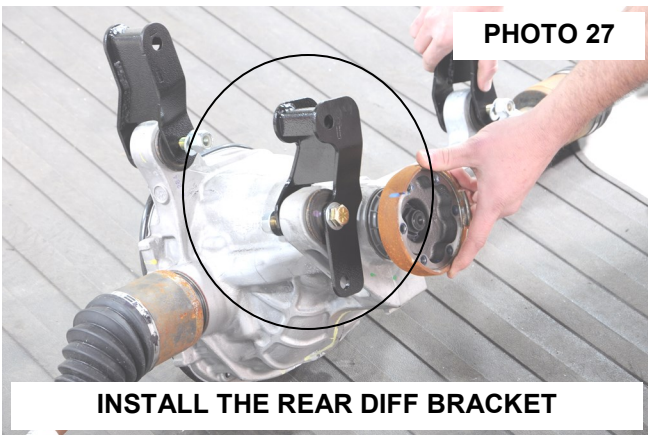


34. Install the sway bar drop brackets using factory hardware. **Do not tighten at this time.**
35. Install the rear cross-member with the supplied 18mm x150mm bolt. The bolt will install through the sway bar bracket and rear cross-member, securing it to the stock location. Do not tighten at this time. **See Photo 29.**
36. Install the passenger side differential brace as shown in **Photo 30** using the supplied 12mm hardware in 1557BAG15. Do not tighten at this time.

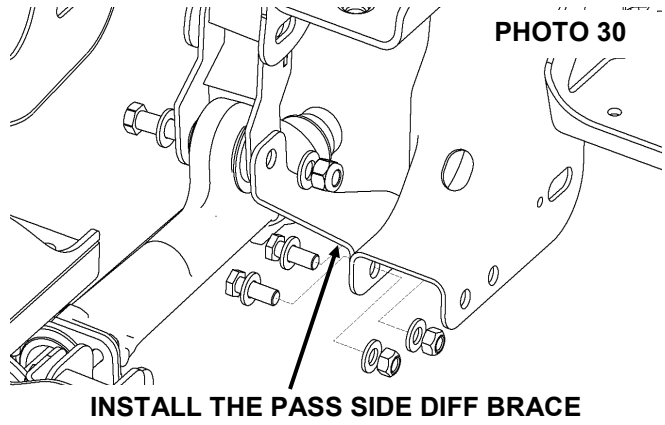
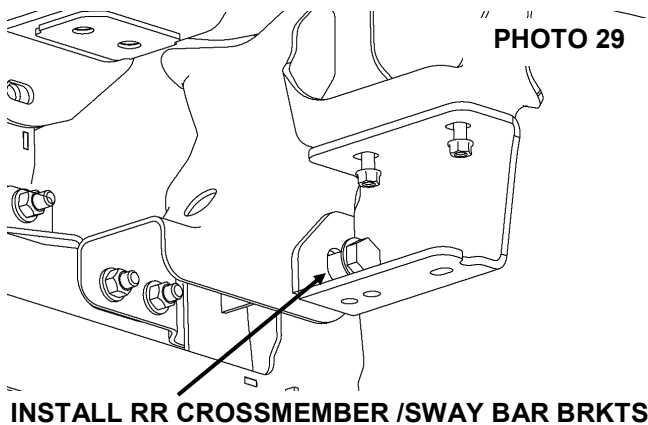






37. Install the rear drivers side diff mount. Use the factory bolt in the top mount and the supplied 1/2" hardware in the crossmember mount. Torque the factory bolt to 90ft-lbs and the 1/2" hardware to 90ft-lbs. **See Photo 31.**
38. Tighten the (3) 9/16" x4" differential bolts. Torque to 100ft/lbs with a 21mm socket and 22mm wrench. **See Photo 32.**
39. At this time tighten the (3) upper factory diff bolts. Torque to 90ft-lbs. using 18mm socket and wrench. Torque the lower 9/16" x4 hardware to 100ft/lbs using a 21mm & 22mm socket and wrench. Also torque the passenger side diff brace hardware to 55ft/lbs using a 19mm socket & 18mm wrench.

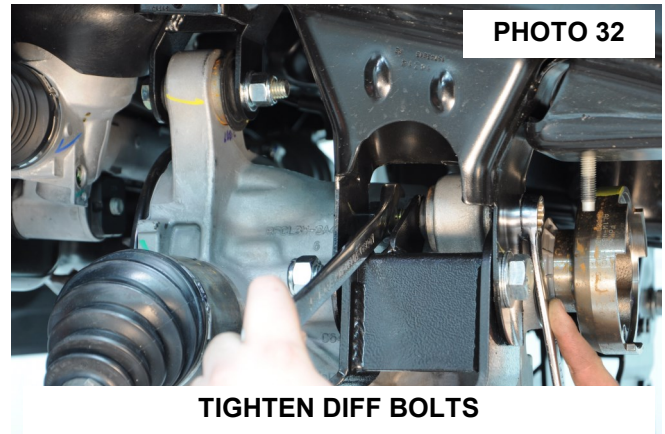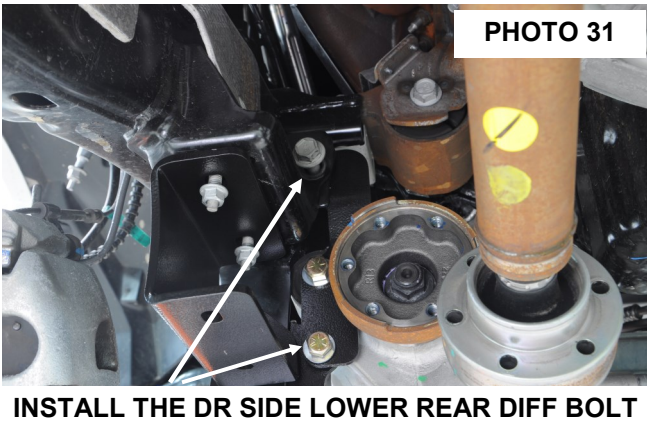

40. Tighten the sway bar drop mounts to the frame. Torque nuts to 35ft-lbs. using a 15mm socket. **See Photo 33.**
41. Reinstall the vent tube on the differential with the new supplied vent tube extension 1557BAG13.
42. Install the front cross-member using the factory hardware. **See Photo 34.** Do not tighten at this time.

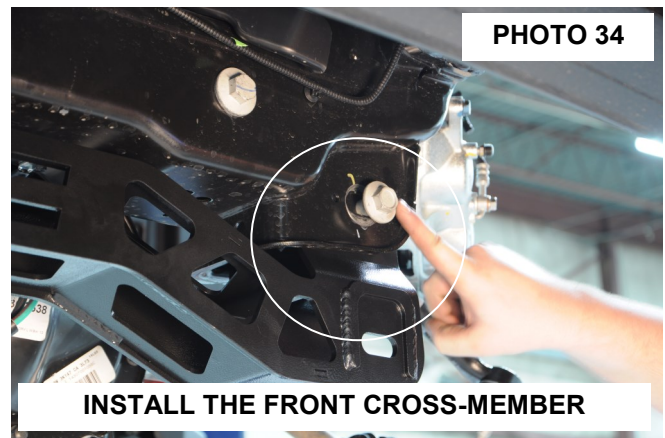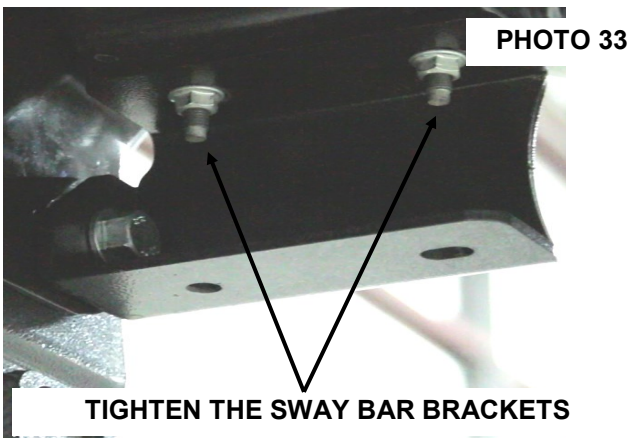


43. Install the lower control arms using the supplied 18mm x 160mm cam bolts, washers and nuts. **See Photo 35.** Do not tighten at this time.
44. Install the new skid plate in the rear cross member threaded holes using the supplied 3/8" x 1" bolts, washers. Attach to the front cross member using the supplied 3/8" x 1" bolts, washers and nylock nuts from 1557BAG13. **See Photo 36.** Torque using a 9/16" socket and wrench to 30ft-lbs.
45. Tighten all upper cross-member bolts. Torque to 190 ft-lbs using a 21mm, 1 1/16" socket and 1 1/16" wrench.

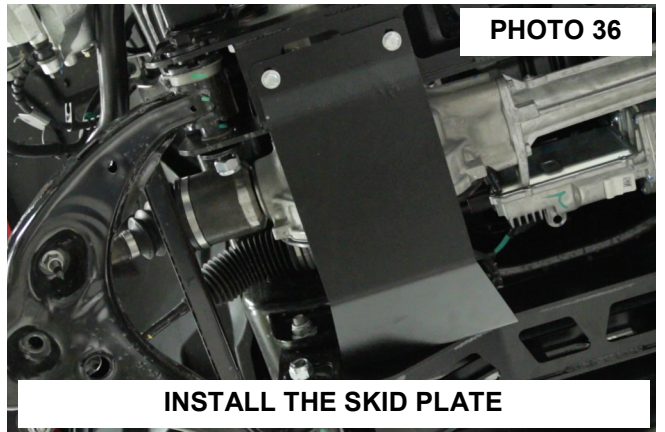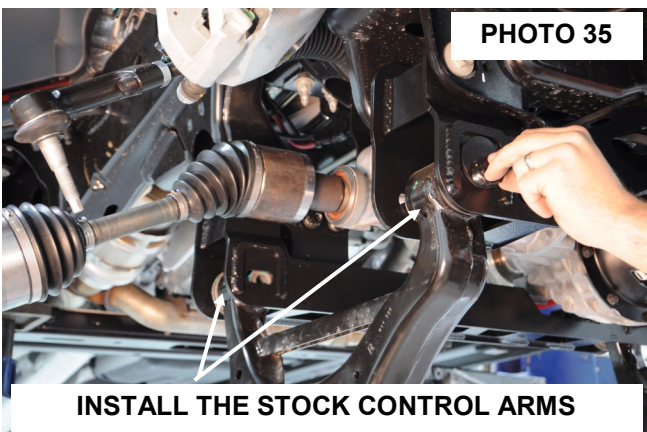




46. Install the drive shaft spacer with supplied 10mm x 85mm hardware. **See Photo 37.** Torque to 35ft-lbs. using a 8mm allen.
47. Using a 10mm wrench remove the brake line bracket from the driver and pass side frame. **See Photo 38.**

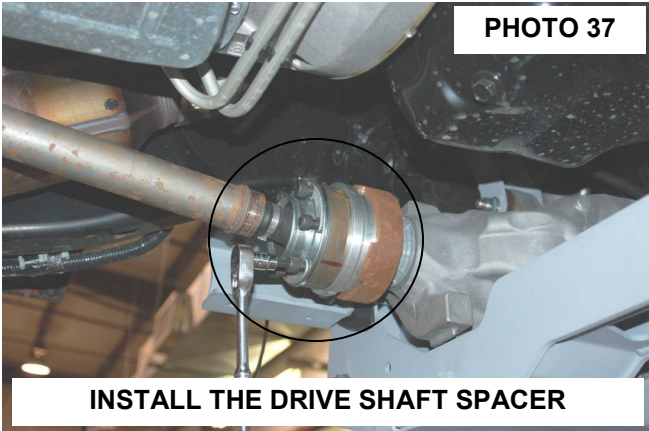


**INSTALL THE DRIVE SHAFT SPACER**

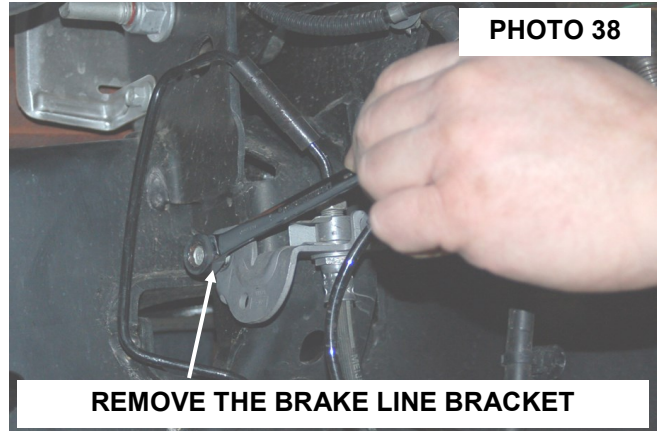


**REMOVE THE BRAKE LINE BRACKET**

48. On the passenger side remove the brake line from the two factory clips. **See Photo 39.**
49. Install the new brake line bracket on the driver and passenger side with the stock hardware. **See Photo 40.**

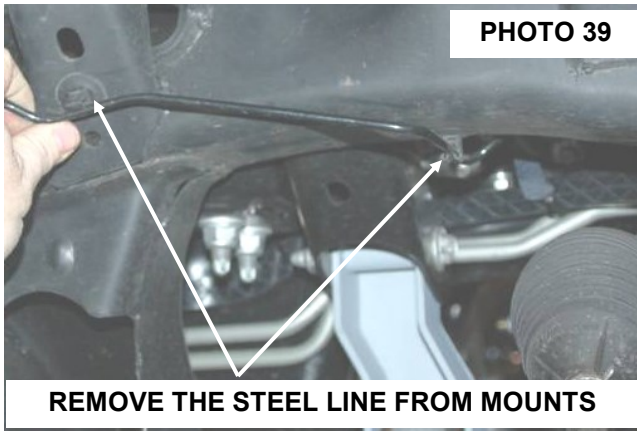

**REMOVE THE STEEL LINE FROM MOUNTS**

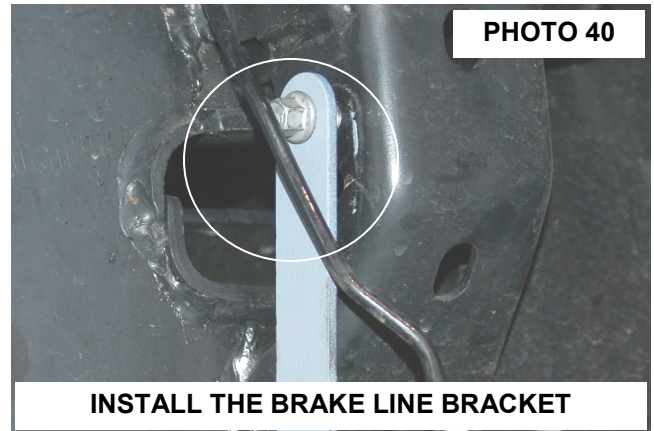


**INSTALL THE BRAKE LINE BRACKET**


50. Install the factory passenger side brake line in the new bracket using the supplied 5/16" x 3/4" bolt, washer and nuts. **Take care to not kink the brake line. See Photo 41.**
51. On the driver side, pull slightly on the brake line to allow the line to be installed on the new bracket. Secure the brake line to the new bracket with the supplied 5/16" x 3/4" bolt, washers and nut. **Take care to not kink the brake line.**
52. Using a 13mm socket / wrench, torque the supplied brake line bolts to 15ft-lbs. Torque stock hardware to 18ft-lbs.

**▲ NOTICE** If installing new lifted struts or Vertex coil overs, follow supplied strut instructions and skip to step 56.

52. Install the supplied 10mm studs in the strut spacers with a 17mm wrench, using the 1/2" jam nut as a spacer. **See Photo 42.**

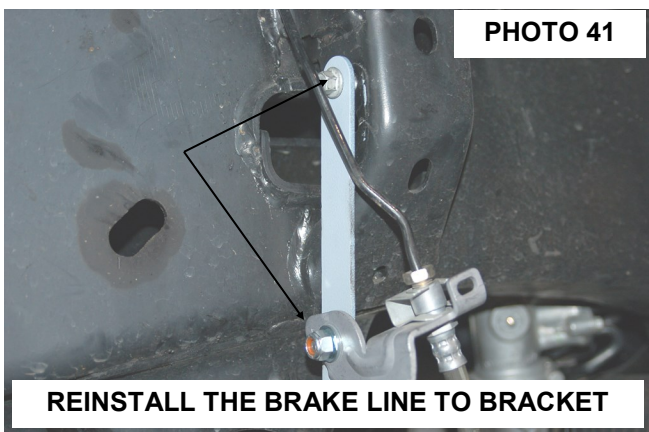



**REINSTALL THE BRAKE LINE TO BRACKET**

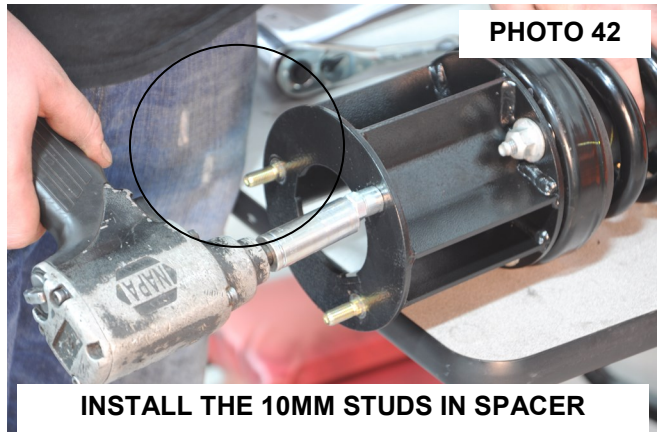



**INSTALL THE 10MM STUDS IN SPACER**





54. Using the stock hardware, install the strut spacers on the struts. Torque to 45ft-lbs. using a 15mm. **See Photo 43.**
55. Install the strut with strut spacers installed in the stock upper mount. Secure with supplied 10mm nuts, washers and lock washers. **See Photo 44.** Do not tighten at this time.

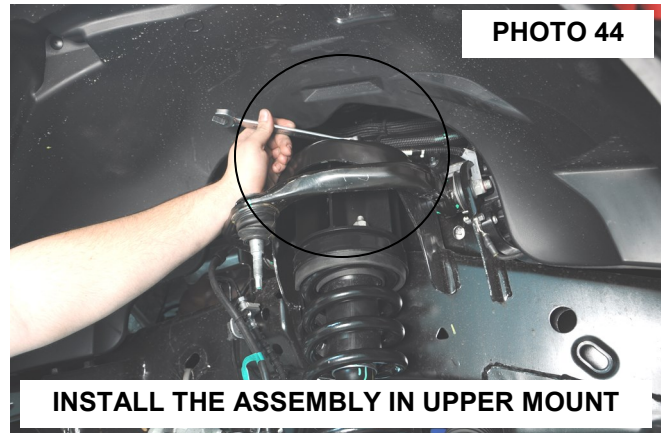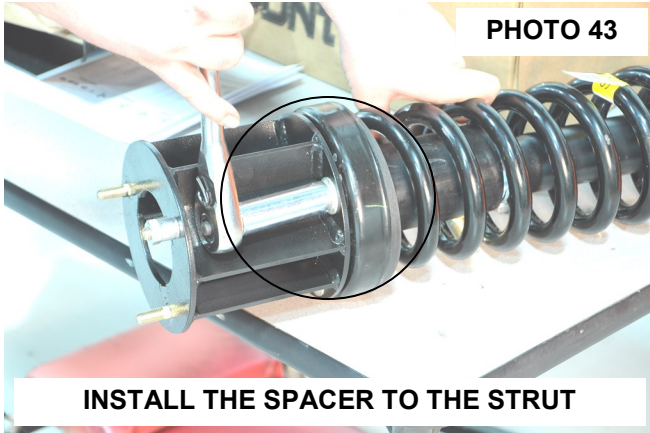


56. Install the lower strut in the lower control arm using the factory hardware. Torque using a 18mm socket.
57. Torque upper strut mount hardware using 17mm wrench.
58. Install the sway bar on the sway bar links located on the lower control arms. Install nut to hold the sway bar in place but do not tighten at this time. **See Photo 45.**
59. Swing up the sway bar and install on the sway bar drop brackets using the supplied 7/16" x 1" bolts, washers and nuts. Torque to 45ft-lbs. using a 5/8 wrench and socket. Torque the sway bar links to 18ft-lbs. using an 18mm socket. **See Photo 46.**

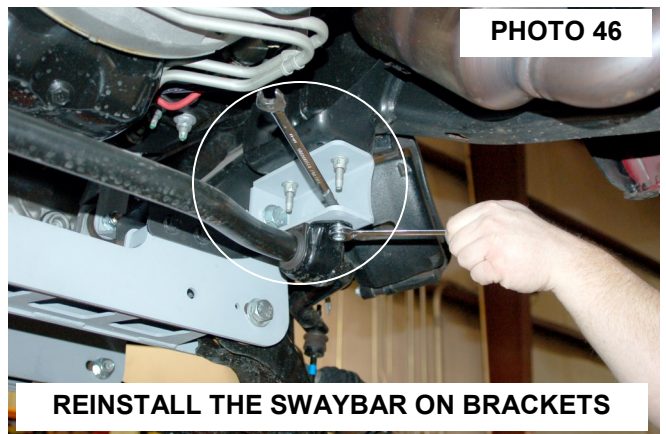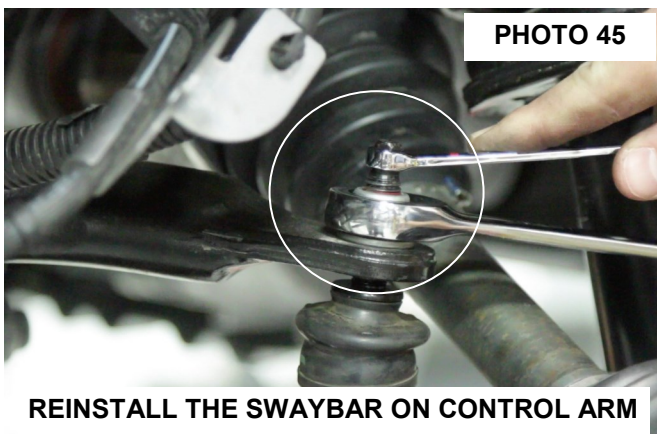


60. Remove the stock bearing assembly from the stock knuckle using a 18mm for the bearing and a 8mm for the locking hub mechanism. Install the bearing assembly on the lifted knuckle using the stock hardware. Torque to 160ft-lbs. using a 18mm wrench. **See Photo 47.**
61. Install the new knuckles using the stock hardware on the lower ball joints, tighten using 24mm and a 12mm wrench. **See Photo 48.** Final torque to 110ft-lbs. using a torque wrench. **Do not use air impact on the upper and lower ball joint, tighten with hand tools.**

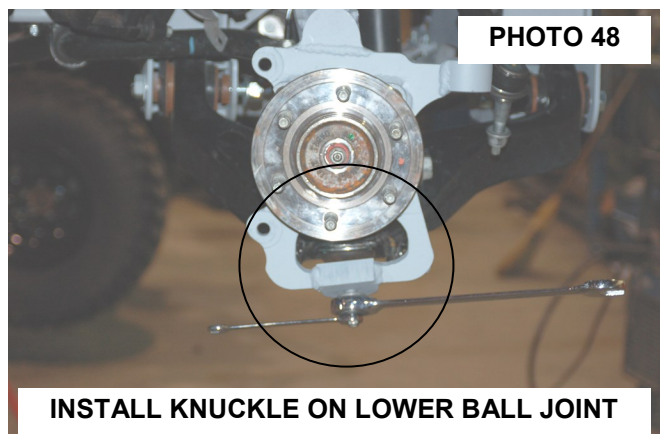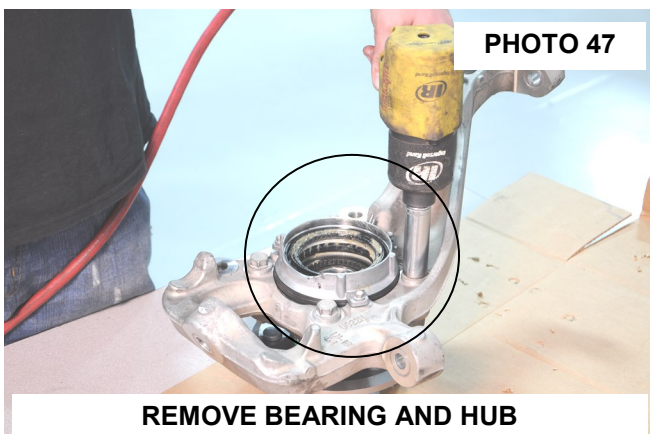

62. Install axle nut and torque to 30ft-lbs. **▲ NOTICE** Do Not Use an impact, caution must be taken or damage to shaft may occur. **See Photo 49.**
63. Install the ABS wire on the bearing assembly, torque to 8 ft-lbs. using a 5mm Allen. **See Photo 50. Install the factory dust shield on the supplied knuckle, using factory hardware. torque to 14ft-lbs. use a 8mm socket.**

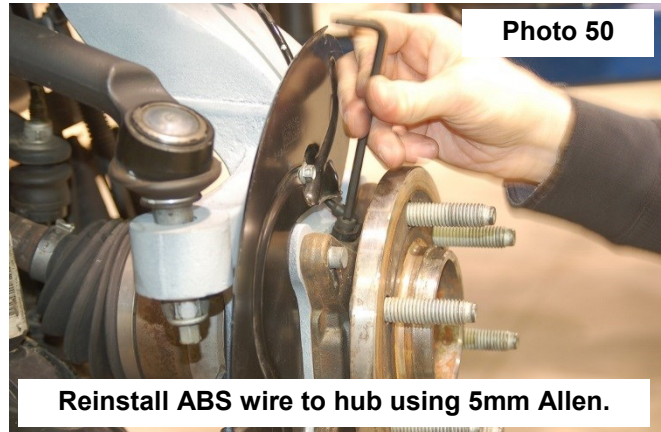

64. Install the caliper to the knuckle with the stock hardware, Torque to 140ft-lbs. using a 21mm socket. **See Photo 51.**


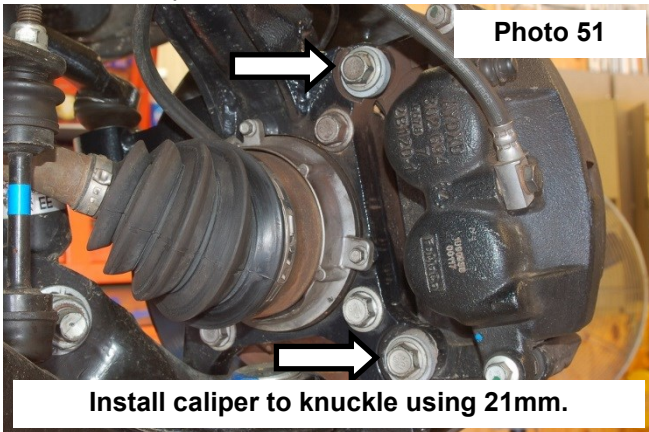


65. Make sure the ABS wire are out of harms way. Using a zip tie, secure the and ABS wire to the knuckle neck.
66. Install the tires and wheels using a 21mm socket. Remove the jack stands and lower the truck to the ground.
67. Tighten the lower control arm bolts using a 1-1/16" wrench and socket. **Torque to 240 ft/lbs.**





## REAR INSTALLATION



1. Chock the front tires and jack the rear the rear end up. Put jack stand under the frame rail and lower truck onto jack stands.
2. Remove tires and wheels using a 21mm socket.
3. Remove rear shocks from the upper and lower mount using 18mm and a 15mm wrench. **See Photo 1 & 2.** Retain the stock hardware.

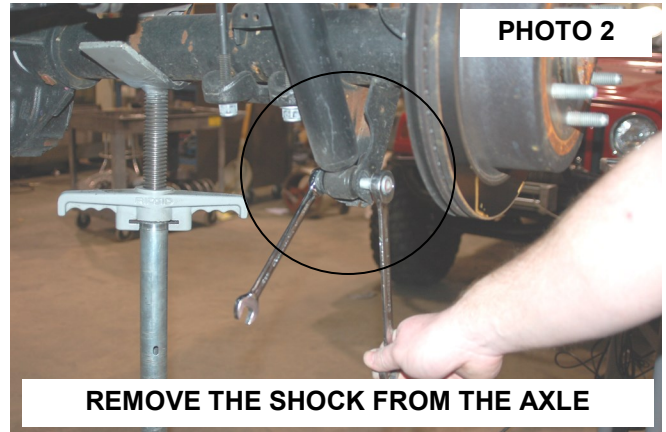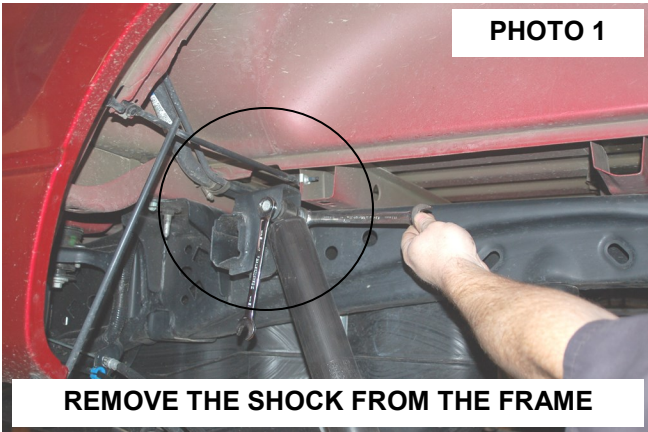

4. Using a 10mm wrench, remove the brake line assembly on the inner driver side frame rail. **See Photo 3.**
5. Install the brake line assembly to the new bracket using the supplied 3/8" x 1" bolt, washers and nut. Torque to 30ft-lbs. using a 9/16" socket and wrench. **See Photo 4.**
6. Install the brake line extension bracket on the frame using the stock hardware and torque to 18ft-lbs. using a 10mm socket. **See Photo 4.**

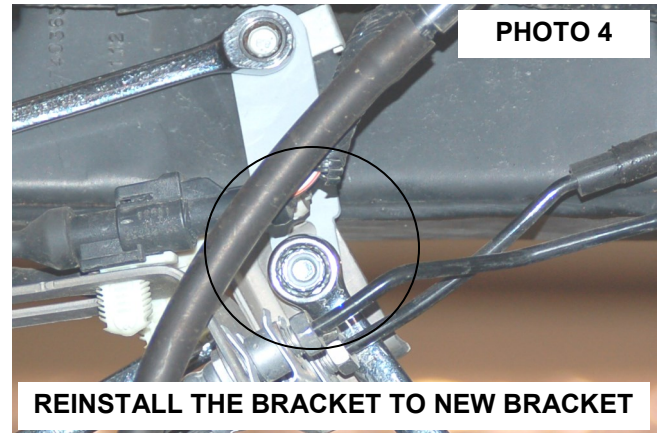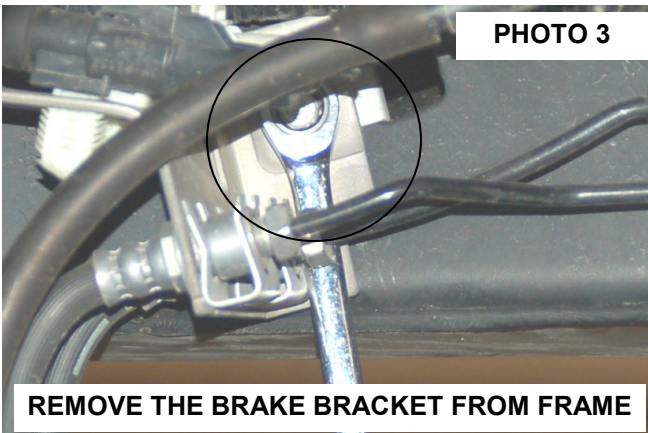

7. Remove the e-brake cable mount with a 10mm wrench as shown on the drivers side as shown in **Photo 5.**
8. Install the supplied e-brake bracket with the factory hardware. Torque to 10ft-lbs. use a 18mm wrench. **See Photo 6.**

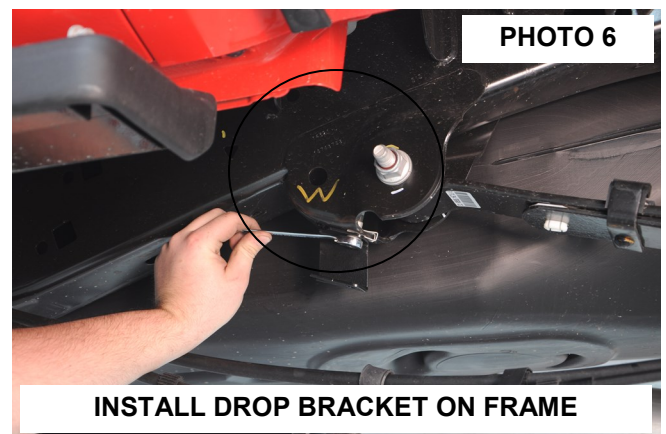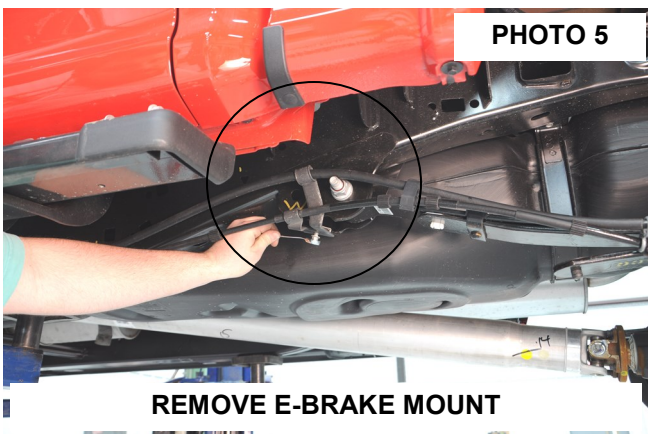



9. If equipped install the e-brake cable mount to the new e-brake drop bracket using the supplied 5/16" bolt, washers, and lock nut, torque to 15ft-lbs. using a 1/2" wrench and socket. **See Photo 7.**
10. Using a jack support the rear end and remove U-bolts using a 21mm socket and remove the factory blocks. **See Photo 8.**

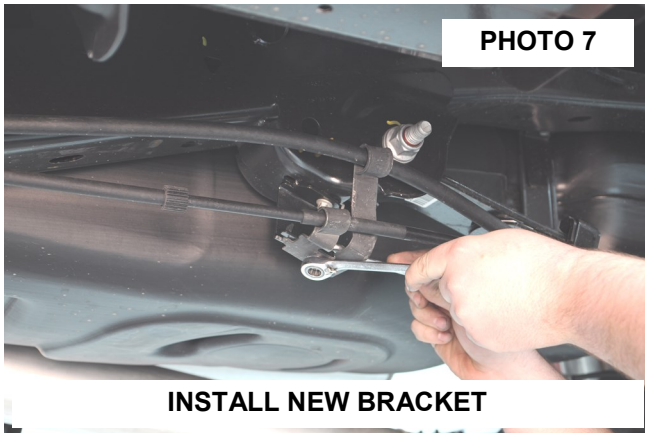


PHOTO 7

INSTALL NEW BRACKET

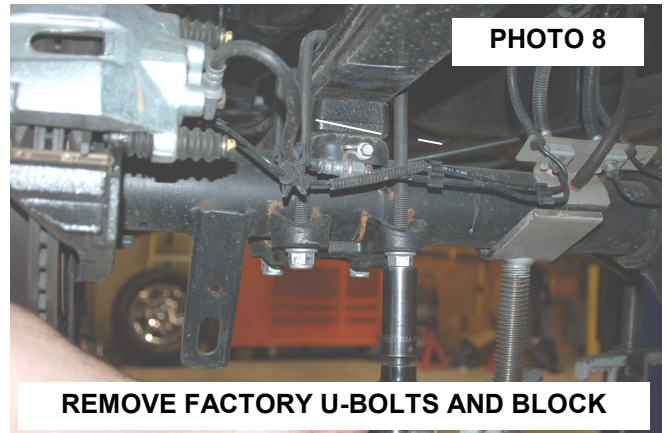


PHOTO 8

REMOVE FACTORY U-BOLTS AND BLOCK

11. Install the supplied blocks on the block pin holes on the axle and raise the axle into place. **See Photo 9.**  
**Note- Taller end of block to the rear of the truck!**
12. Install the U-bolts, bottom plate, washers and nuts. torque to 90ft-lbs. using a 22mm socket.
13. Remove the bump stop using a 15mm socket. See Photo 10.

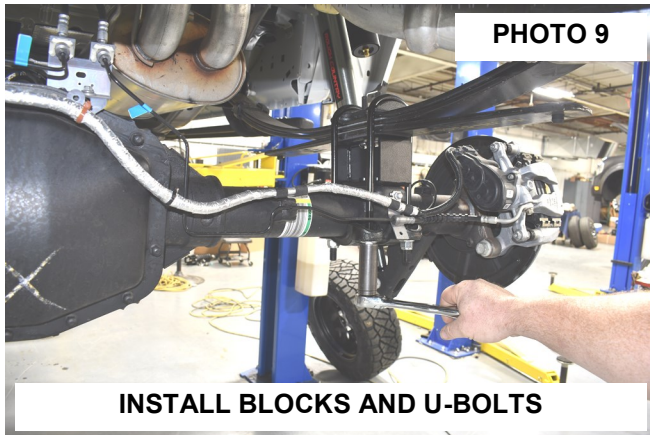


PHOTO 9

INSTALL BLOCKS AND U-BOLTS

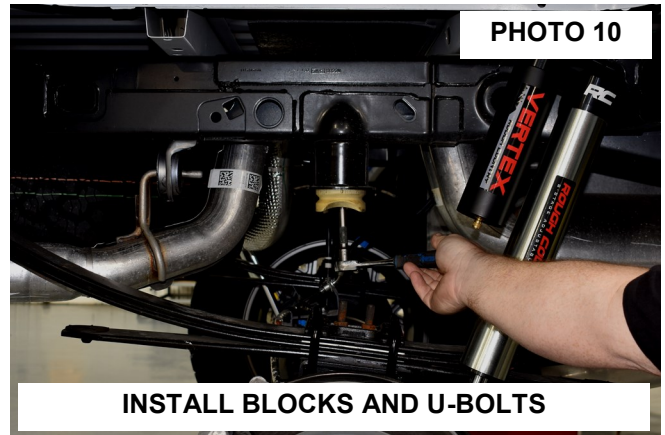


PHOTO 10

INSTALL BLOCKS AND U-BOLTS

14. Locate the spacer and 10mm x 60mm hex head bolt. See Photo 11.
15. Place the spacer in-between the bumpstop and the frame. Then secure using the 10 x60mm hex head bolt. Tighten using a 17mm socket. See Photo 12.

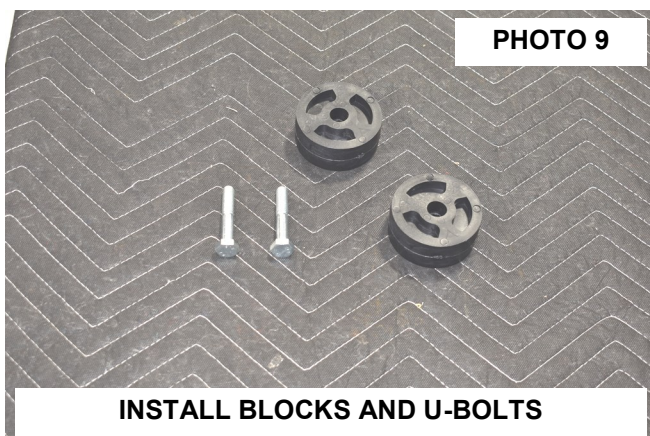


PHOTO 9

INSTALL BLOCKS AND U-BOLTS

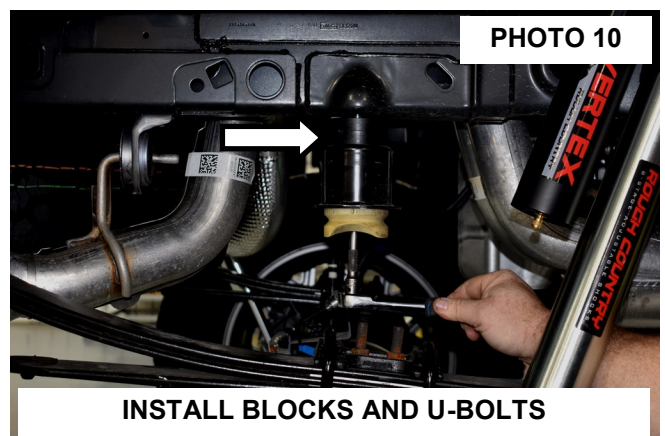


PHOTO 10


INSTALL BLOCKS AND U-BOLTS

15. For V2 rear shocks and Vertex rear shocks follow shock installation instructions included in shock package and skip to step 17.
16. Install the new shock absorbers in the upper and lower mounts using the stock hardware. Torque to 55ft-lbs. using a 18 and 15mm wrench. **N3 shocks will mount with the body down.**
17. Install the rear tire and wheels.
18. Raise up the rear of the vehicle and remove the jack stands. Lower the vehicle to the ground.






CUTTING / DRILLING TEMPLATE—FR SIDE OF DRIVER CROSSMEMBER

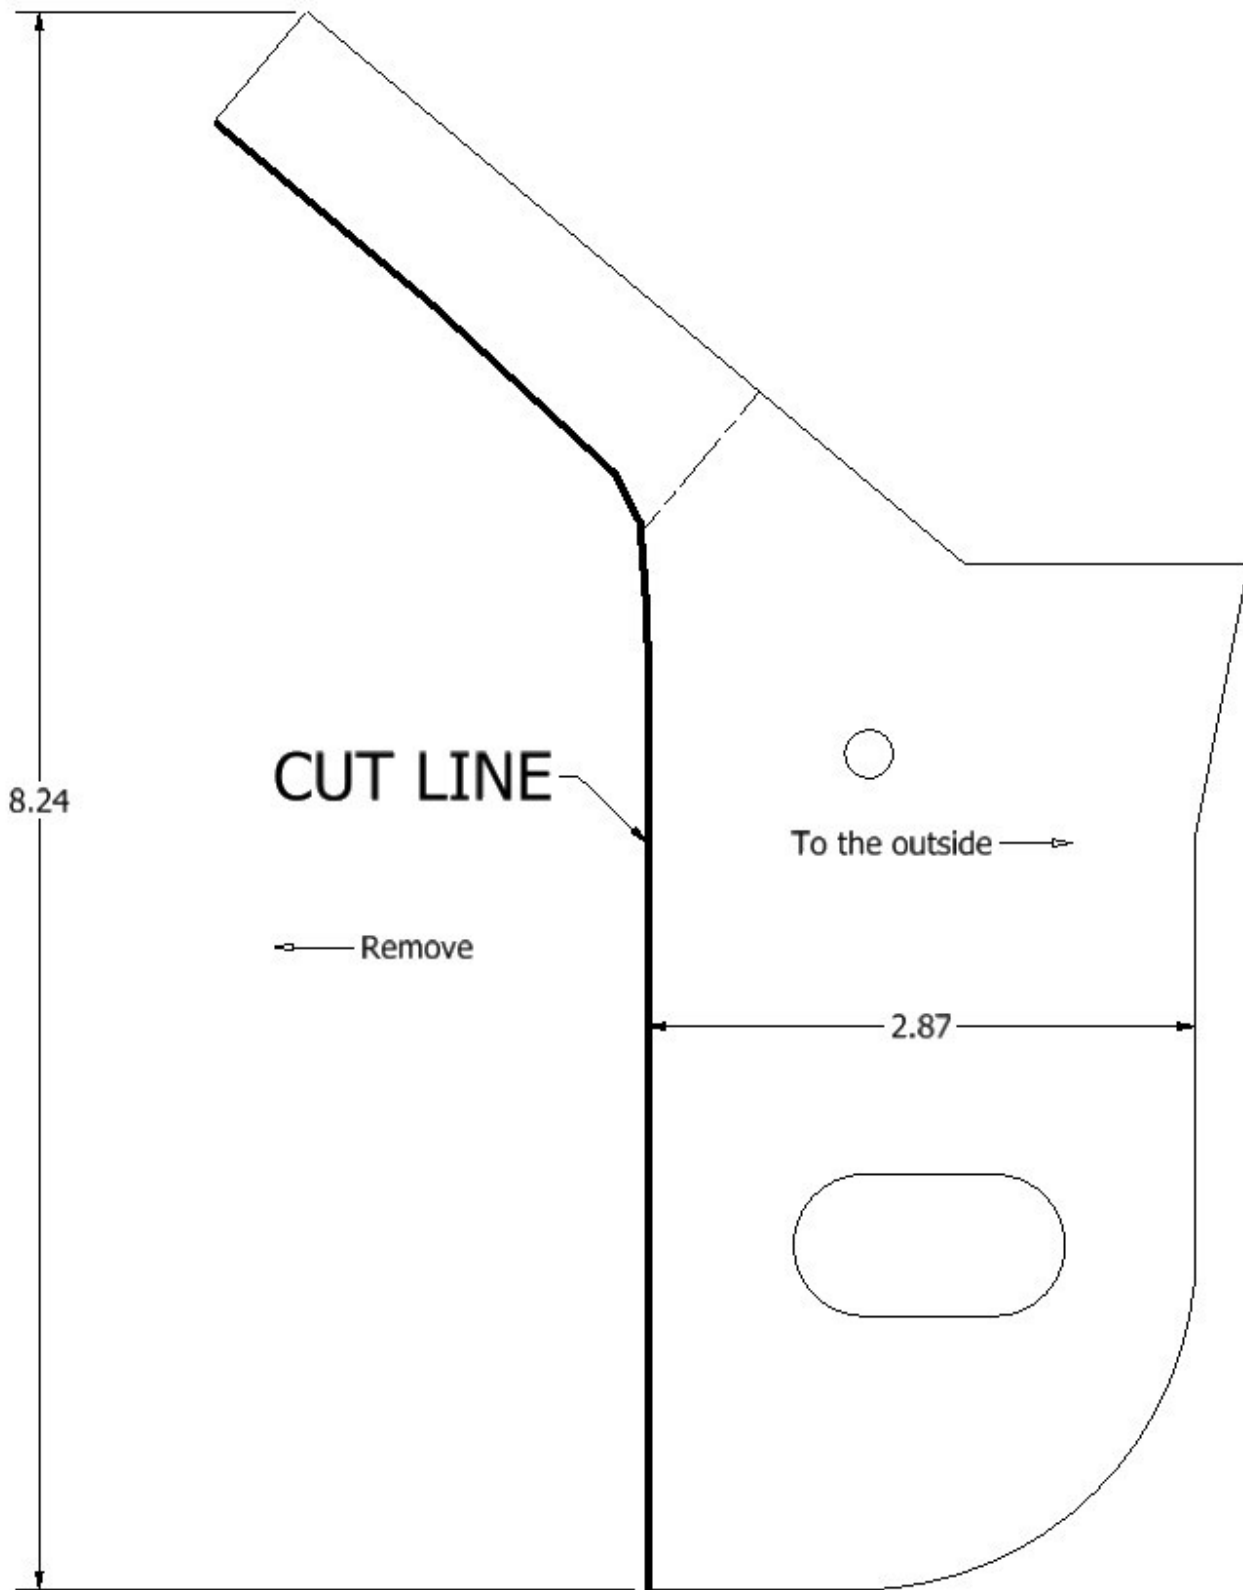



CUTTING / DRILLING TEMPLATE—REAR OF DRIVER SIDE CROSSMEMBER

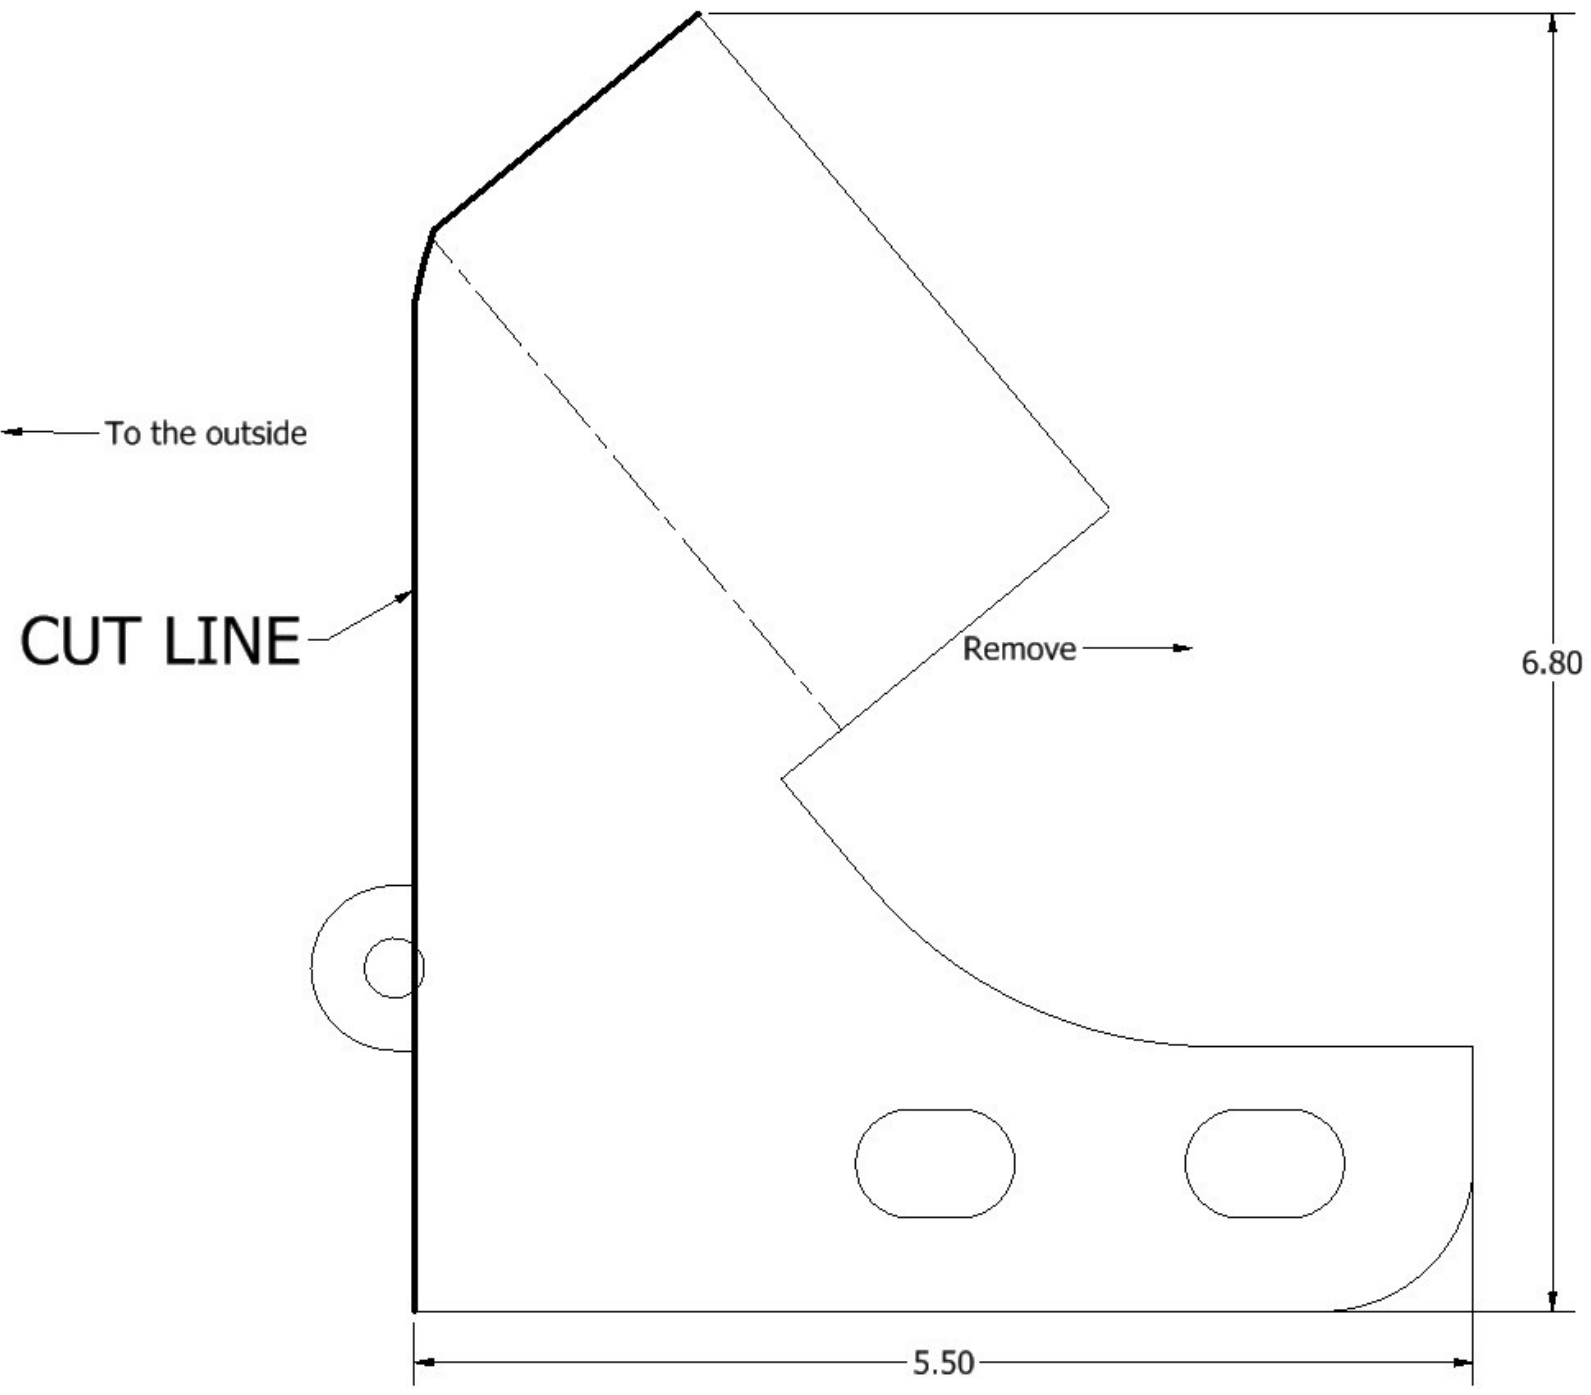



## POST INSTALLATION INSTRUCTIONS

1. Check all fasteners for proper torque. Check to ensure there is adequate clearance between all rotating, mobile, fixed and heated members. Check steering gear for interference and proper working order. Test brake system
2. Perform steering sweep. Check to ensure brake hoses have sufficient slack and will not contact rotating, mobile, or fixed members, adjust lines/brackets to eliminate interference and maintain proper working order. Failure to perform inspections may result in component failure
3. Readjust headlights to factory settings
4. Have vehicle aligned by a certified alignment professional.
5. Re-torque all nuts, bolts, and especially u-bolts after the first 100 miles, again after another 100 miles and then check periodically thereafter
6. All components must be retightened after 500 miles, and every three thousand miles after installation.

### **Thank you for purchasing a Rough Country Suspension System.**

By purchasing any item sold by Rough Country, LLC, the buyer expressly warrants that he/she is in compliance with all applicable , State, and Local laws and regulations regarding the purchase, ownership, and use of the item. It shall be the buyers responsibility to comply with all Federal, State and Local laws governing the sales of any items listed, illustrated or sold. The buyer expressly agrees to indemnify and hold harmless Rough Country, LLC for all claims resulting directly or indirectly from the purchase, ownership, or use of the items.



