
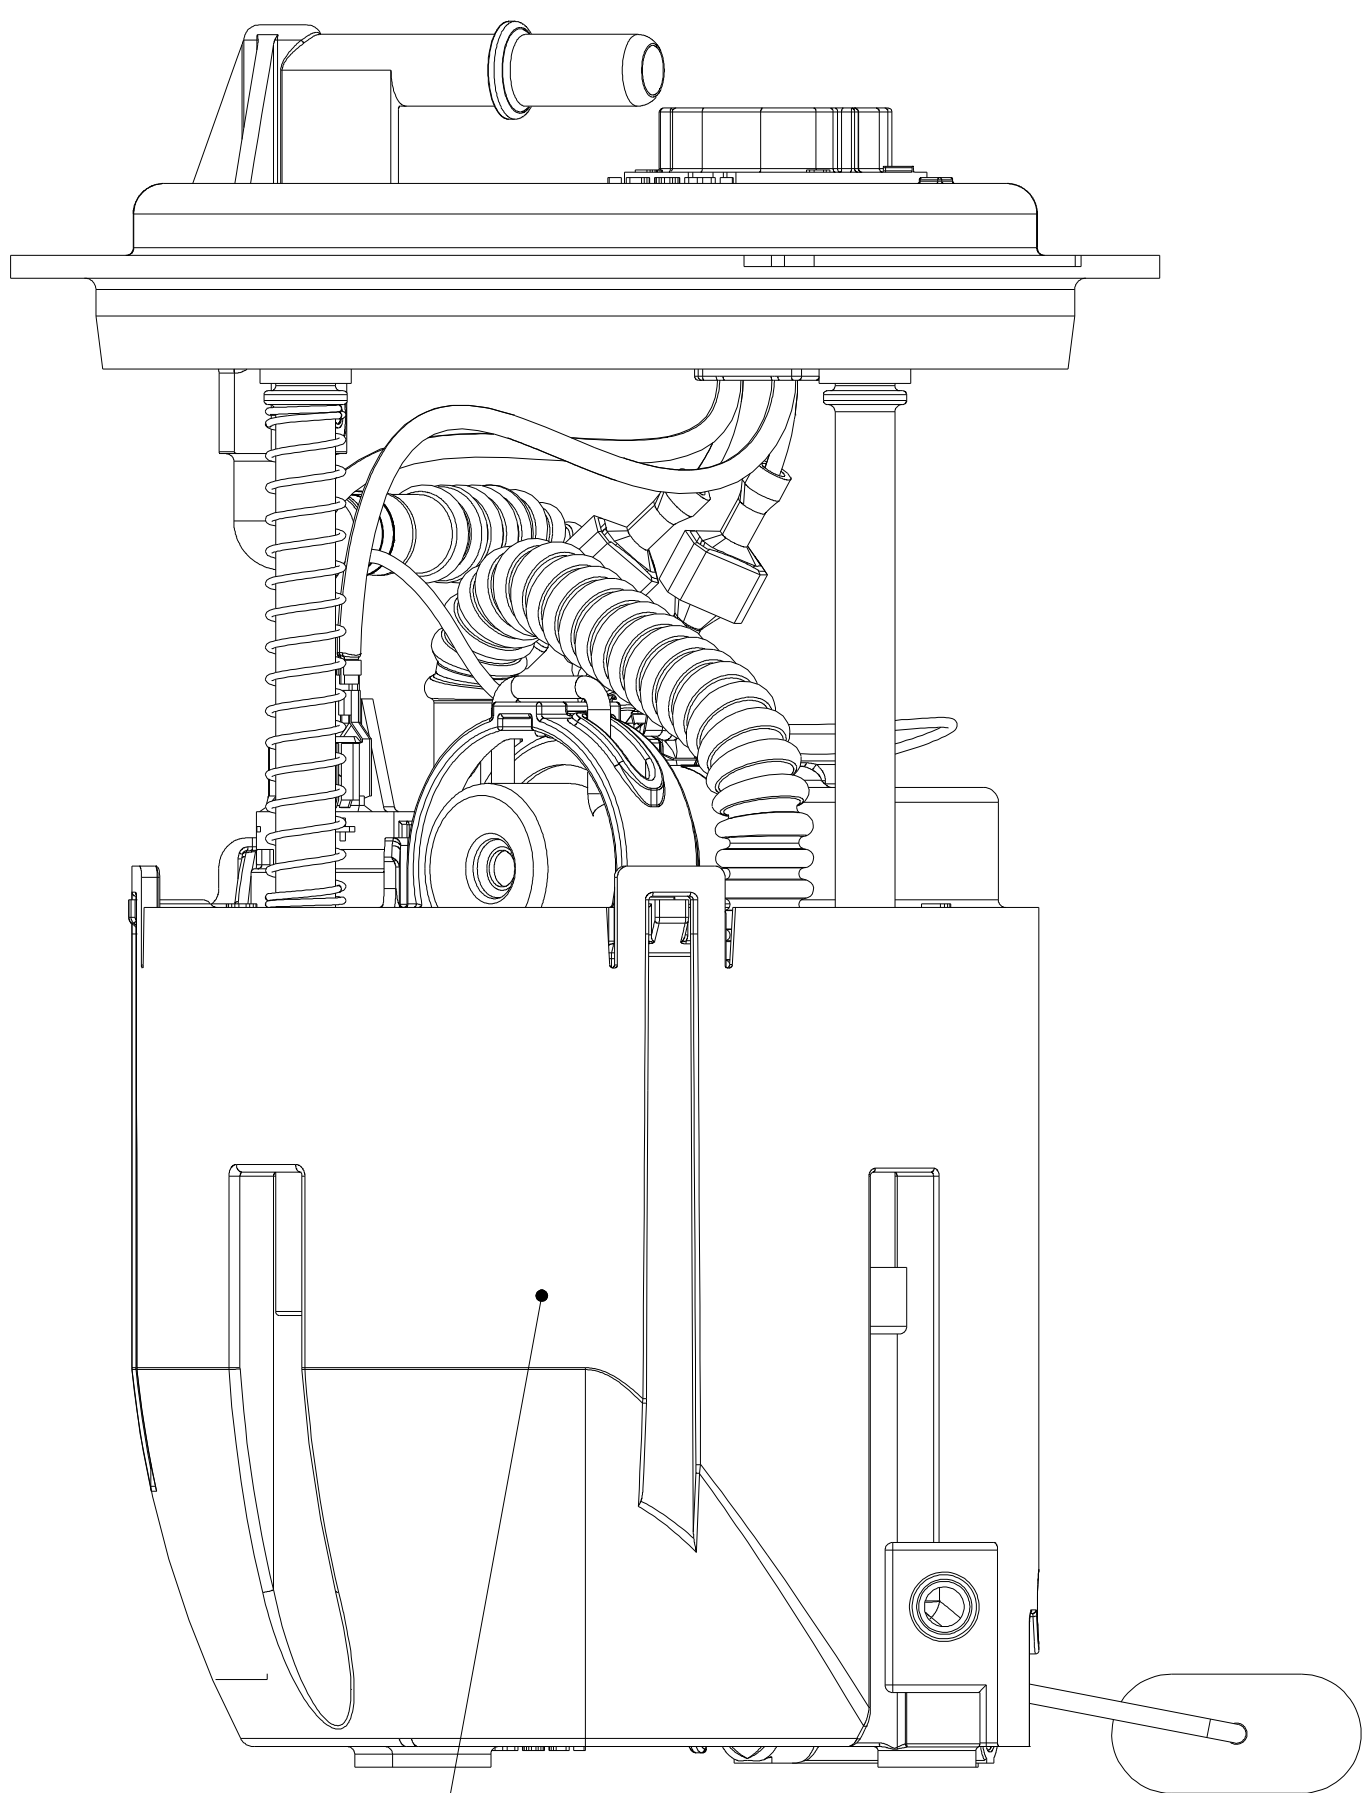
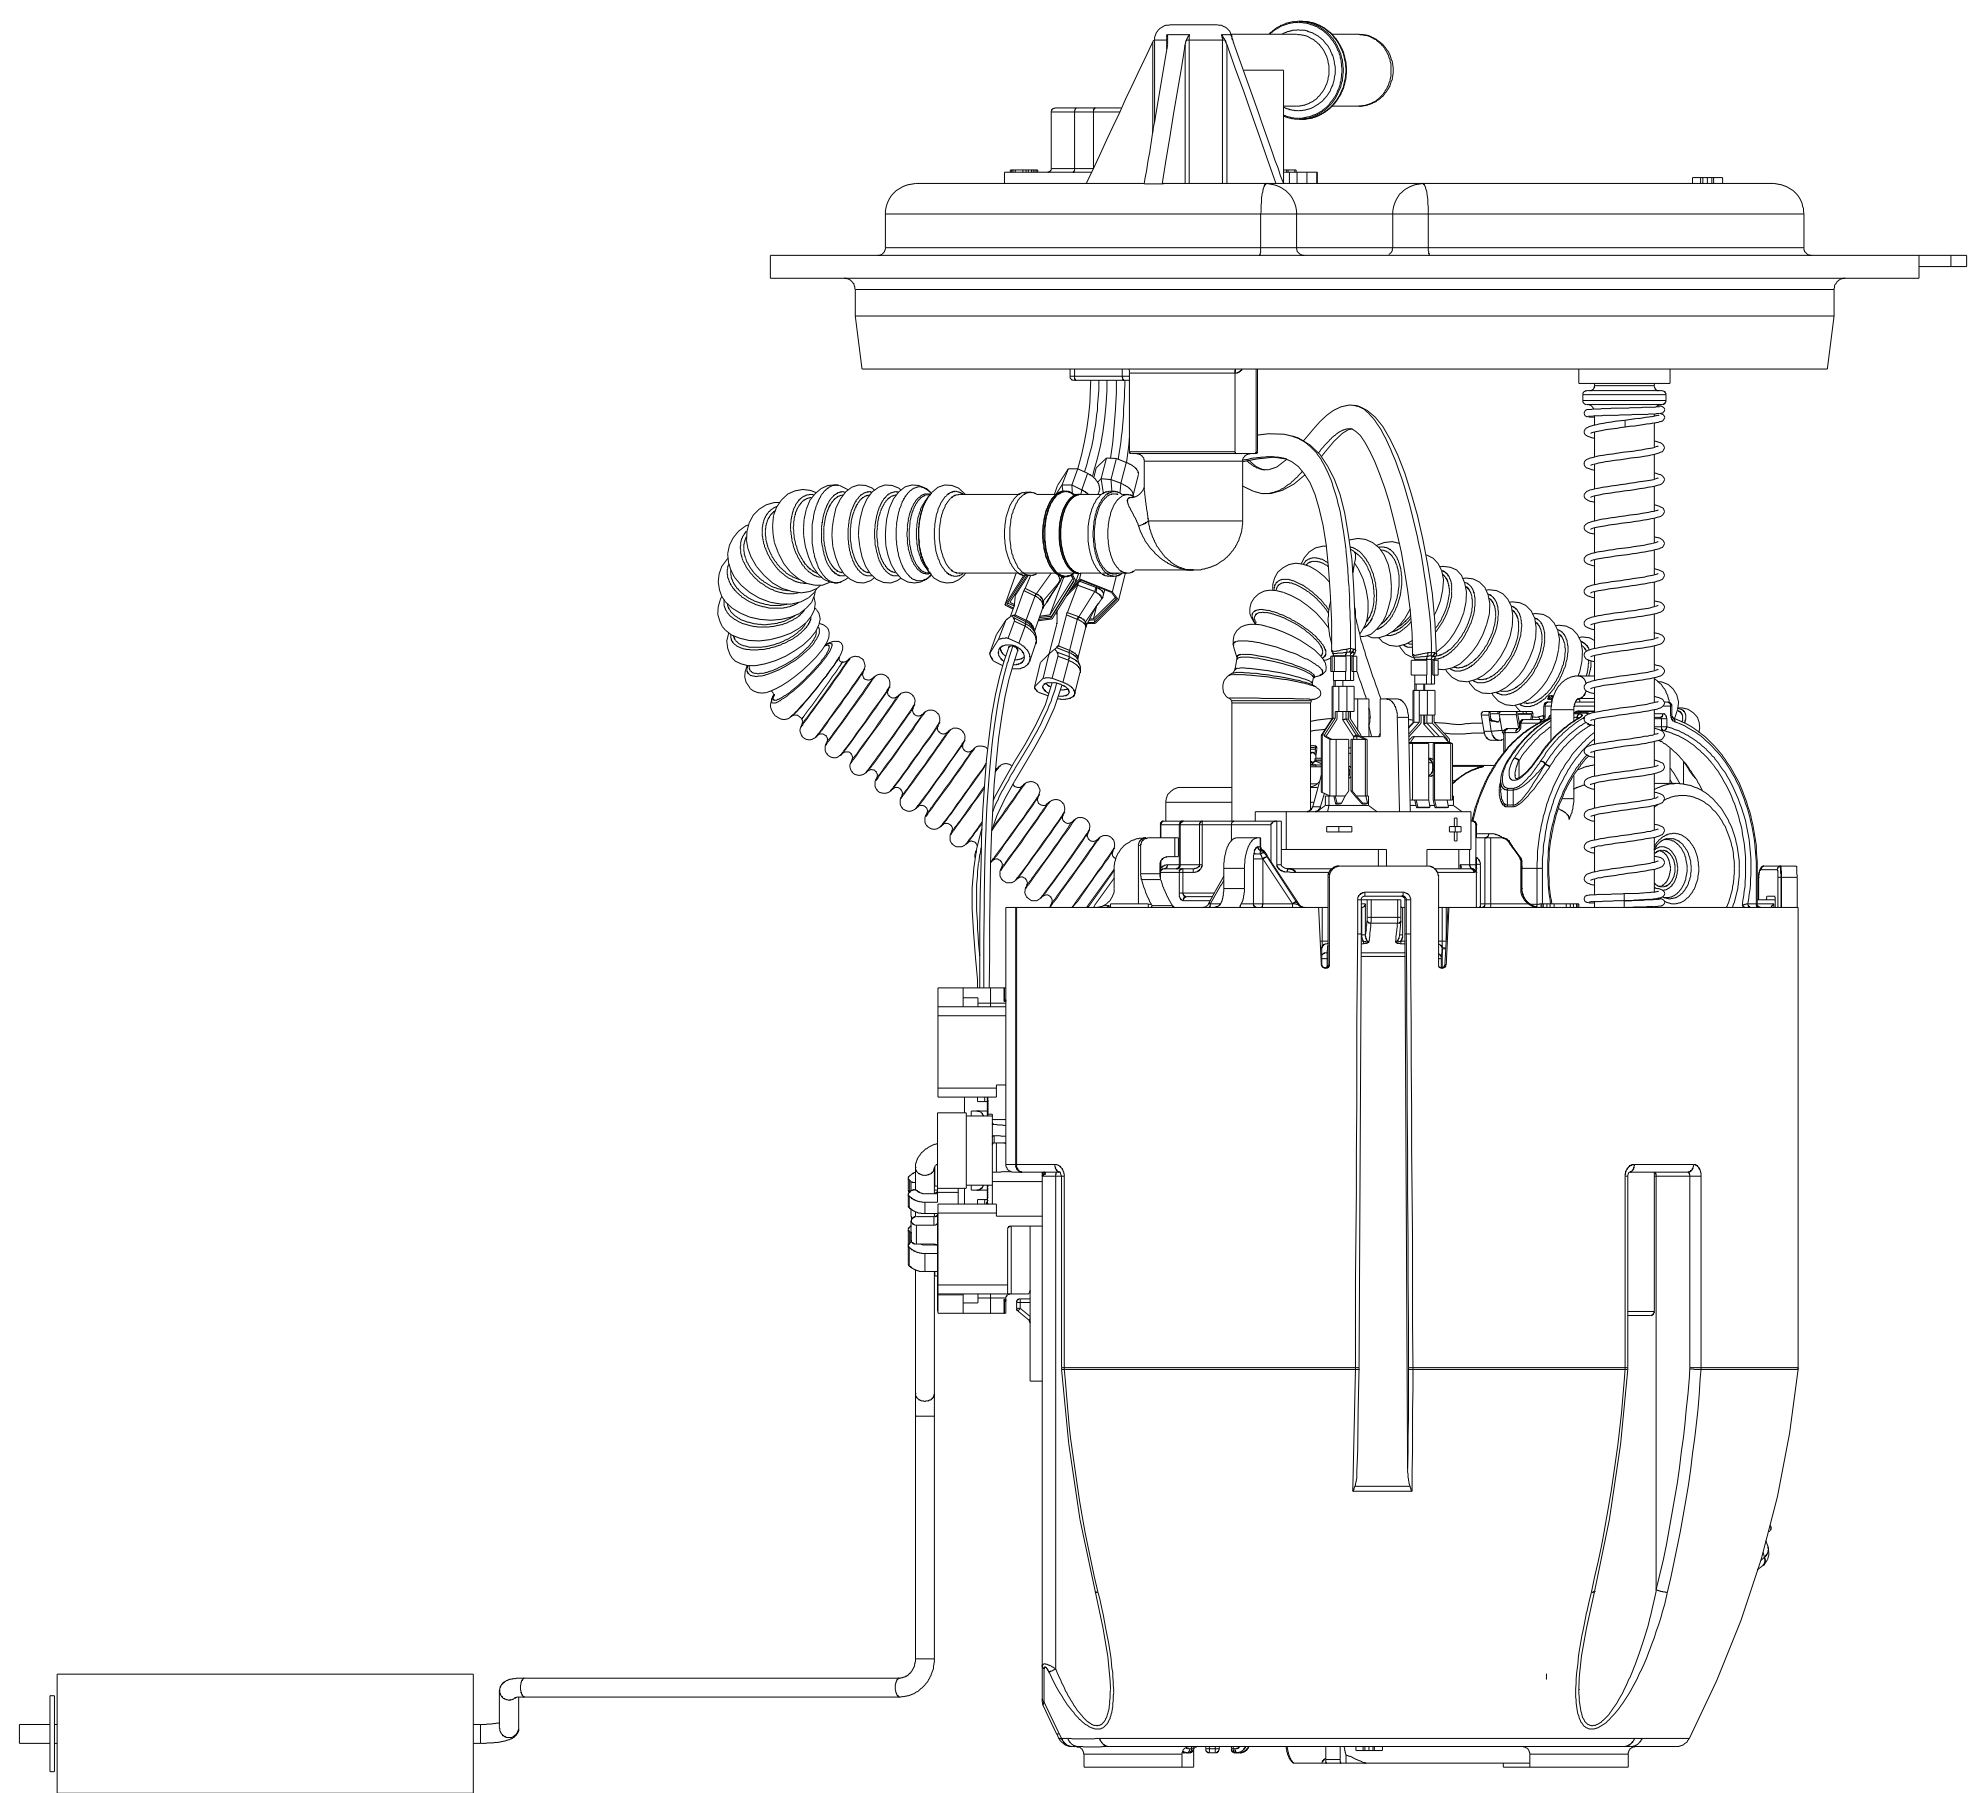
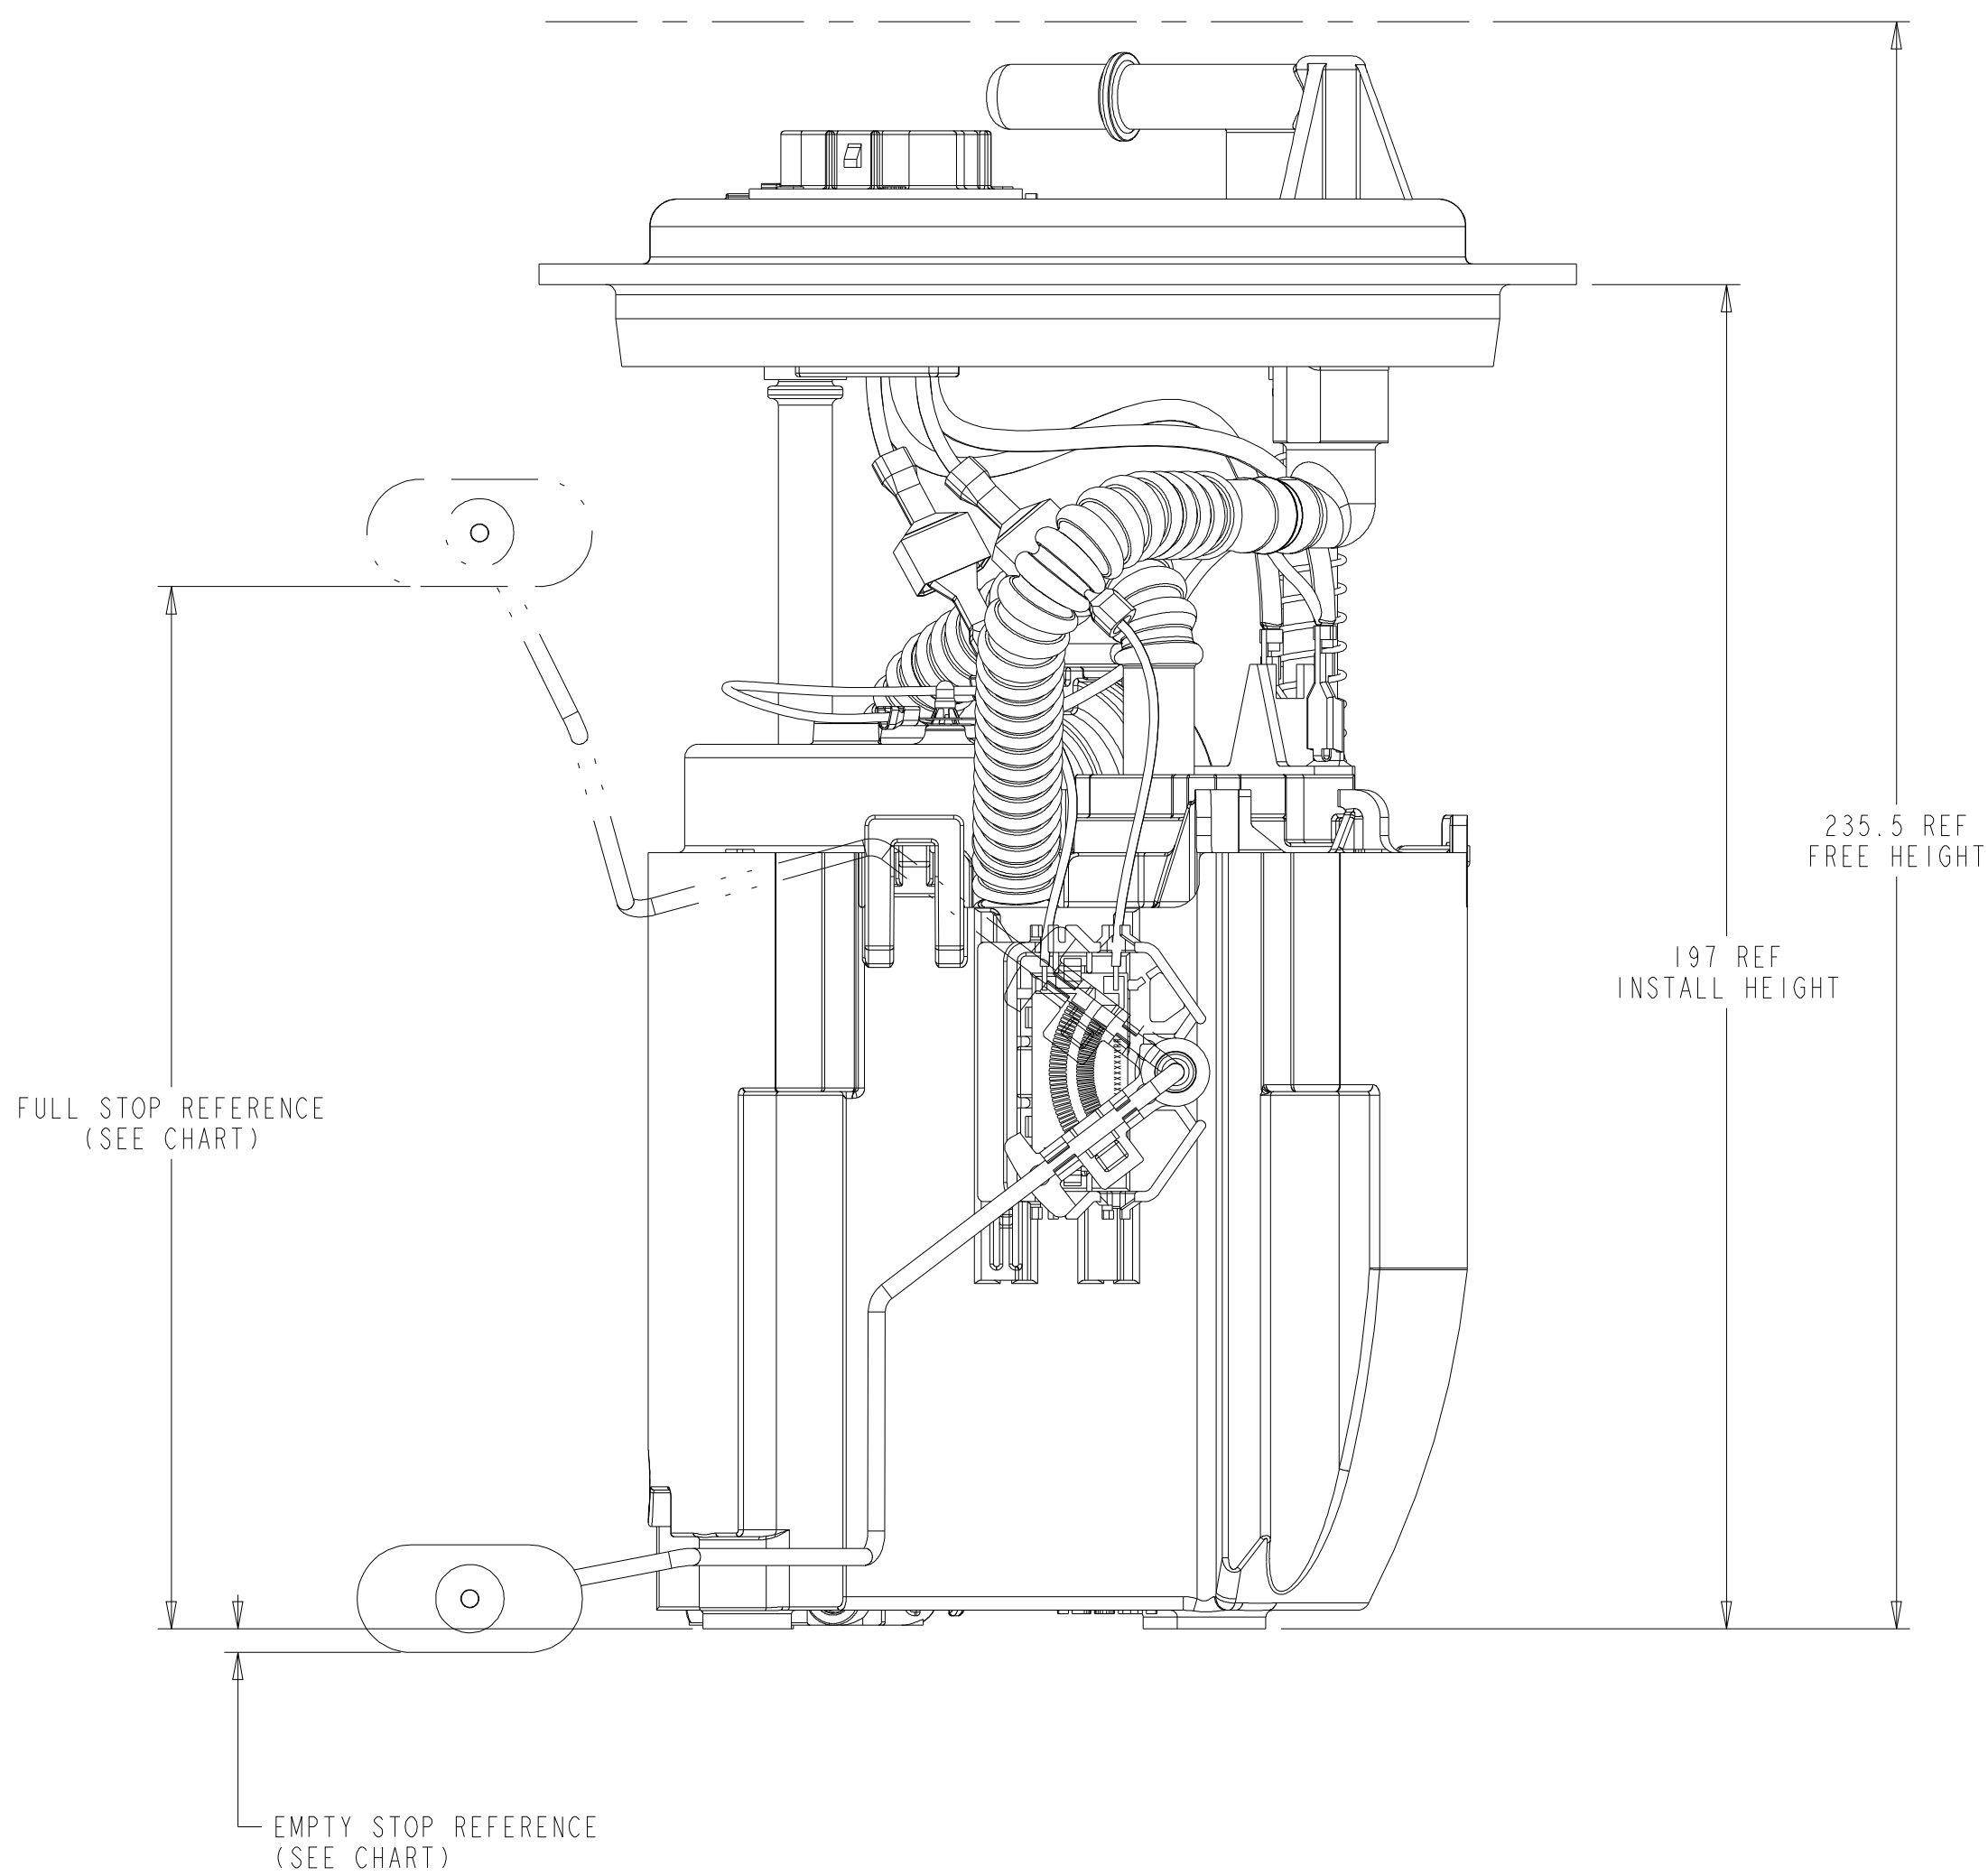
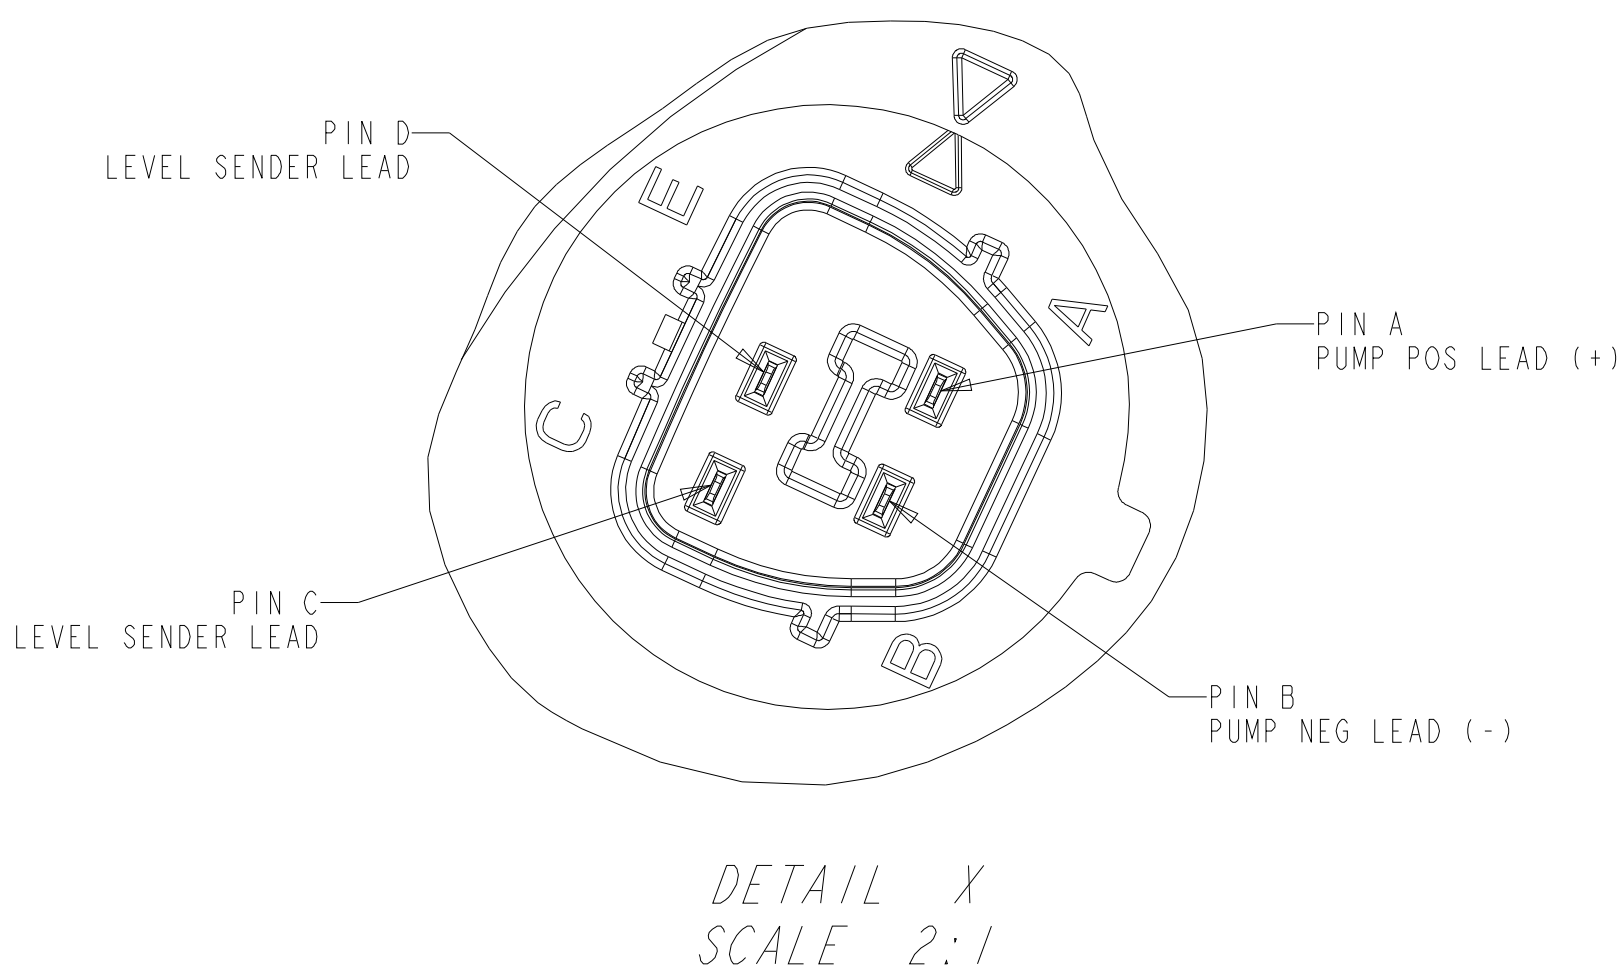



REVISIONS						
ZONE	LTR	DESCRIPTION	CHANGE No	DATE	BY	APPR'D
	AA	INITIAL RELEASE	DR56144	03MAR16	JAK	DJC
	AB	AB1 CHANGED TO ITR CHECK VALVE AB2 REMOVED GEN 11 CHECK VALVE	DR61314	12JAN17	SLK	DJC
	AC	AC1 ADDED ESD GROUND	DR61768	13FEB17	SLK	DJC

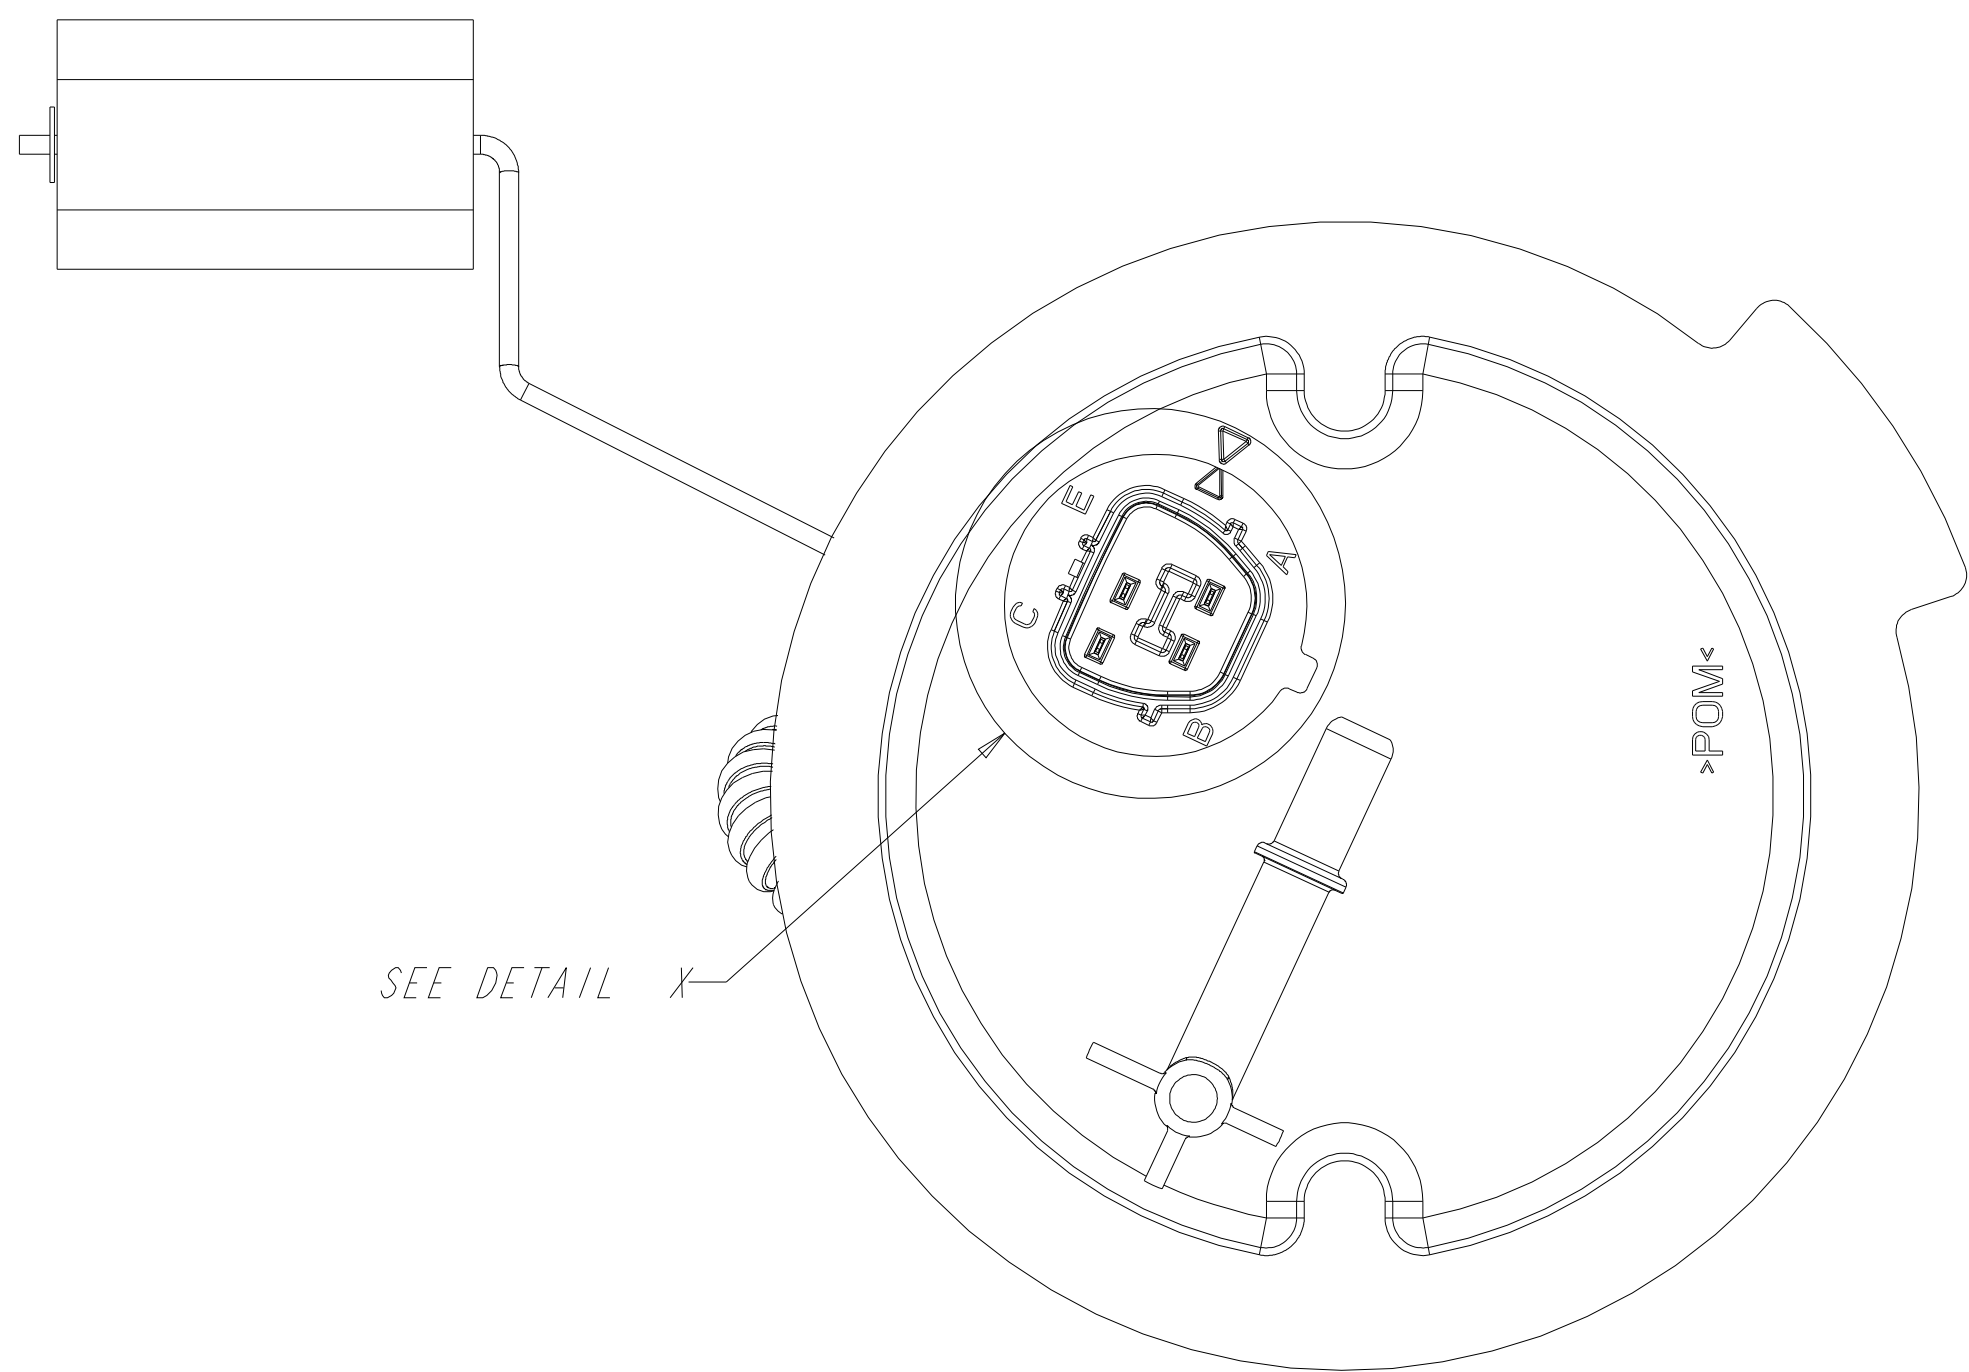

LEVEL SENDER UNIT HEIGHT VS. RESISTANCE		
FLOAT POSITION	HEIGHT (mm)	RESISTANCE (Ohms)
FULL STOP	153 REF	13 ± 2
EMPTY STOP	-3 REF	120 ± 4

- NOTES:
- SPECIAL CUSTOMER PACKAGING REQUIREMENTS MAY CALL FOR THE ADDITION OF SPECIFIC LABELS NOT SHOWN ON THIS DRAWING.
  - MODULE TO BE PACKAGED USING COMPONENTS NOTED ON BOM SO THAT CONTAMINATION FROM FOREIGN MATERIAL IS PREVENTED:
    - PLUG PROTECTORS ON PORTS
    - POLY BAG
  - SHOWN WIRE ROUTING MAY DIFFER FROM FINISHED PRODUCT.

METRIC ALL DIMENSIONS ARE IN MILLIMETERS			
DO NOT SCALE			
DECIMAL TOLERANCES UNLESS OTHERWISE SPECIFIED: ONE PLACE ±0.25 TWO PLACE ±0.13 ANGLES ±1°			
THIRD ANGLE PROJECTION			
DIMENSIONS IN ACCORDANCE WITH ASME Y14.5 - 2009			
			
630 COLUMBIA ST. CARO, MI 48723 +1 989.675.1723			
KEY PRODUCT CHARACTERISTICS			
REFER TO TI AUTOMOTIVE GLOBAL ADVANCED QUALITY PLANNING DOCUMENT A-720-001-001 FOR THE CLASSIFICATION AND CONTROL OF KEY PRODUCT CHARACTERISTICS			
▽ SAFETY CHARACTERISTIC	---	---	---
◇ CRITICAL CHARACTERISTIC	---	---	---
⬢ HIGH IMPACT CHARACTERISTIC	---	---	---
ENGINEER: D.CATLIN 03MAR16 MATERIAL/SPECIFICATION: SEE NOTES			
DESIGNER: J.ROUTRAS 03MAR16			
CAD SYSTEM: PROVE SCALE: 1:1 SHEET NO. 1 OF 1			
REFERENCE TO: 2D: AR0040645/AC			
000114996/AB 3D: AR0040643/AC			
FUEL MODULE OUTLINE			
SIZE: A0 DRAWING NUMBER: TUI98			