

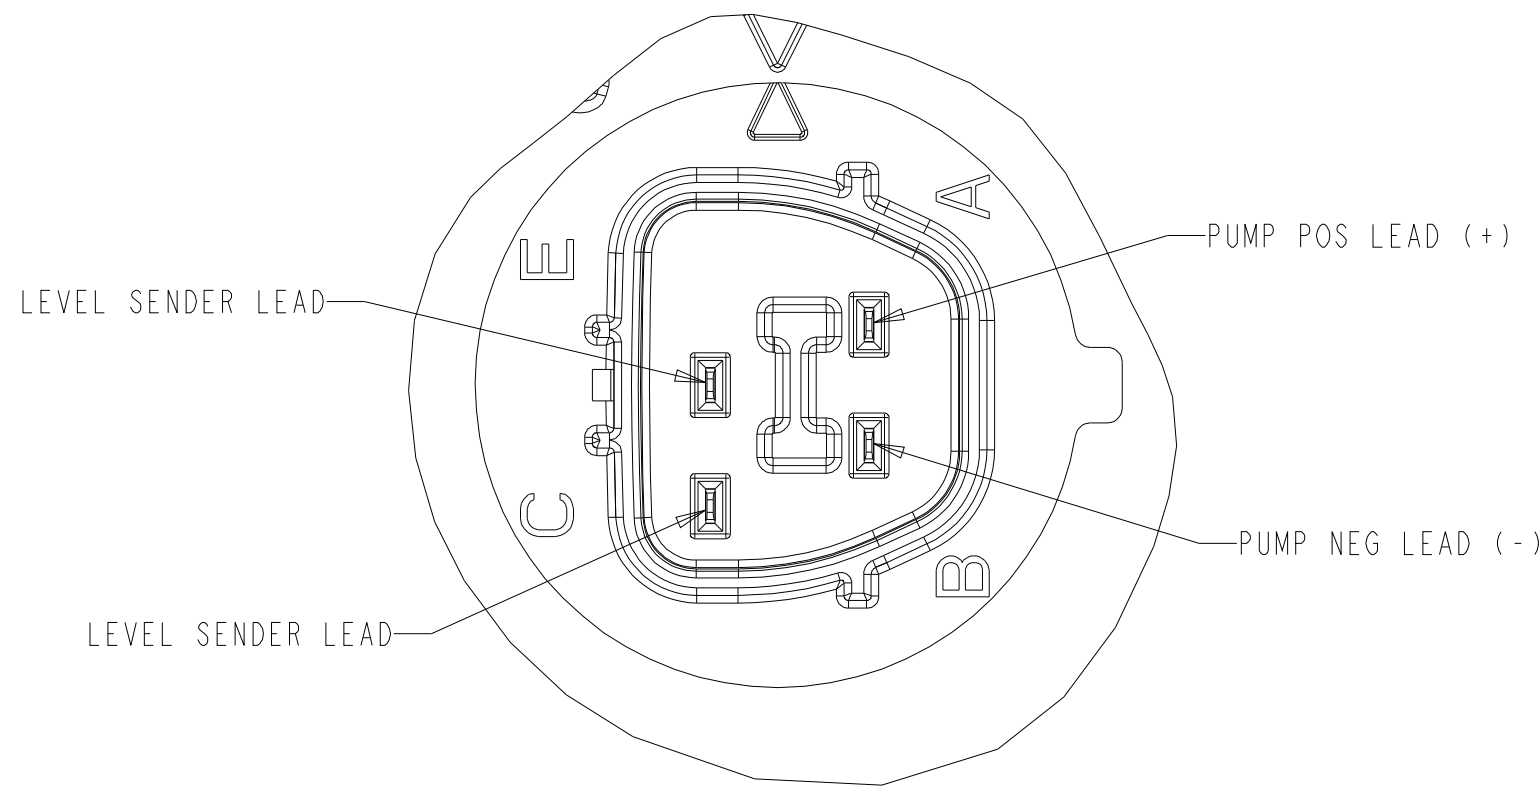
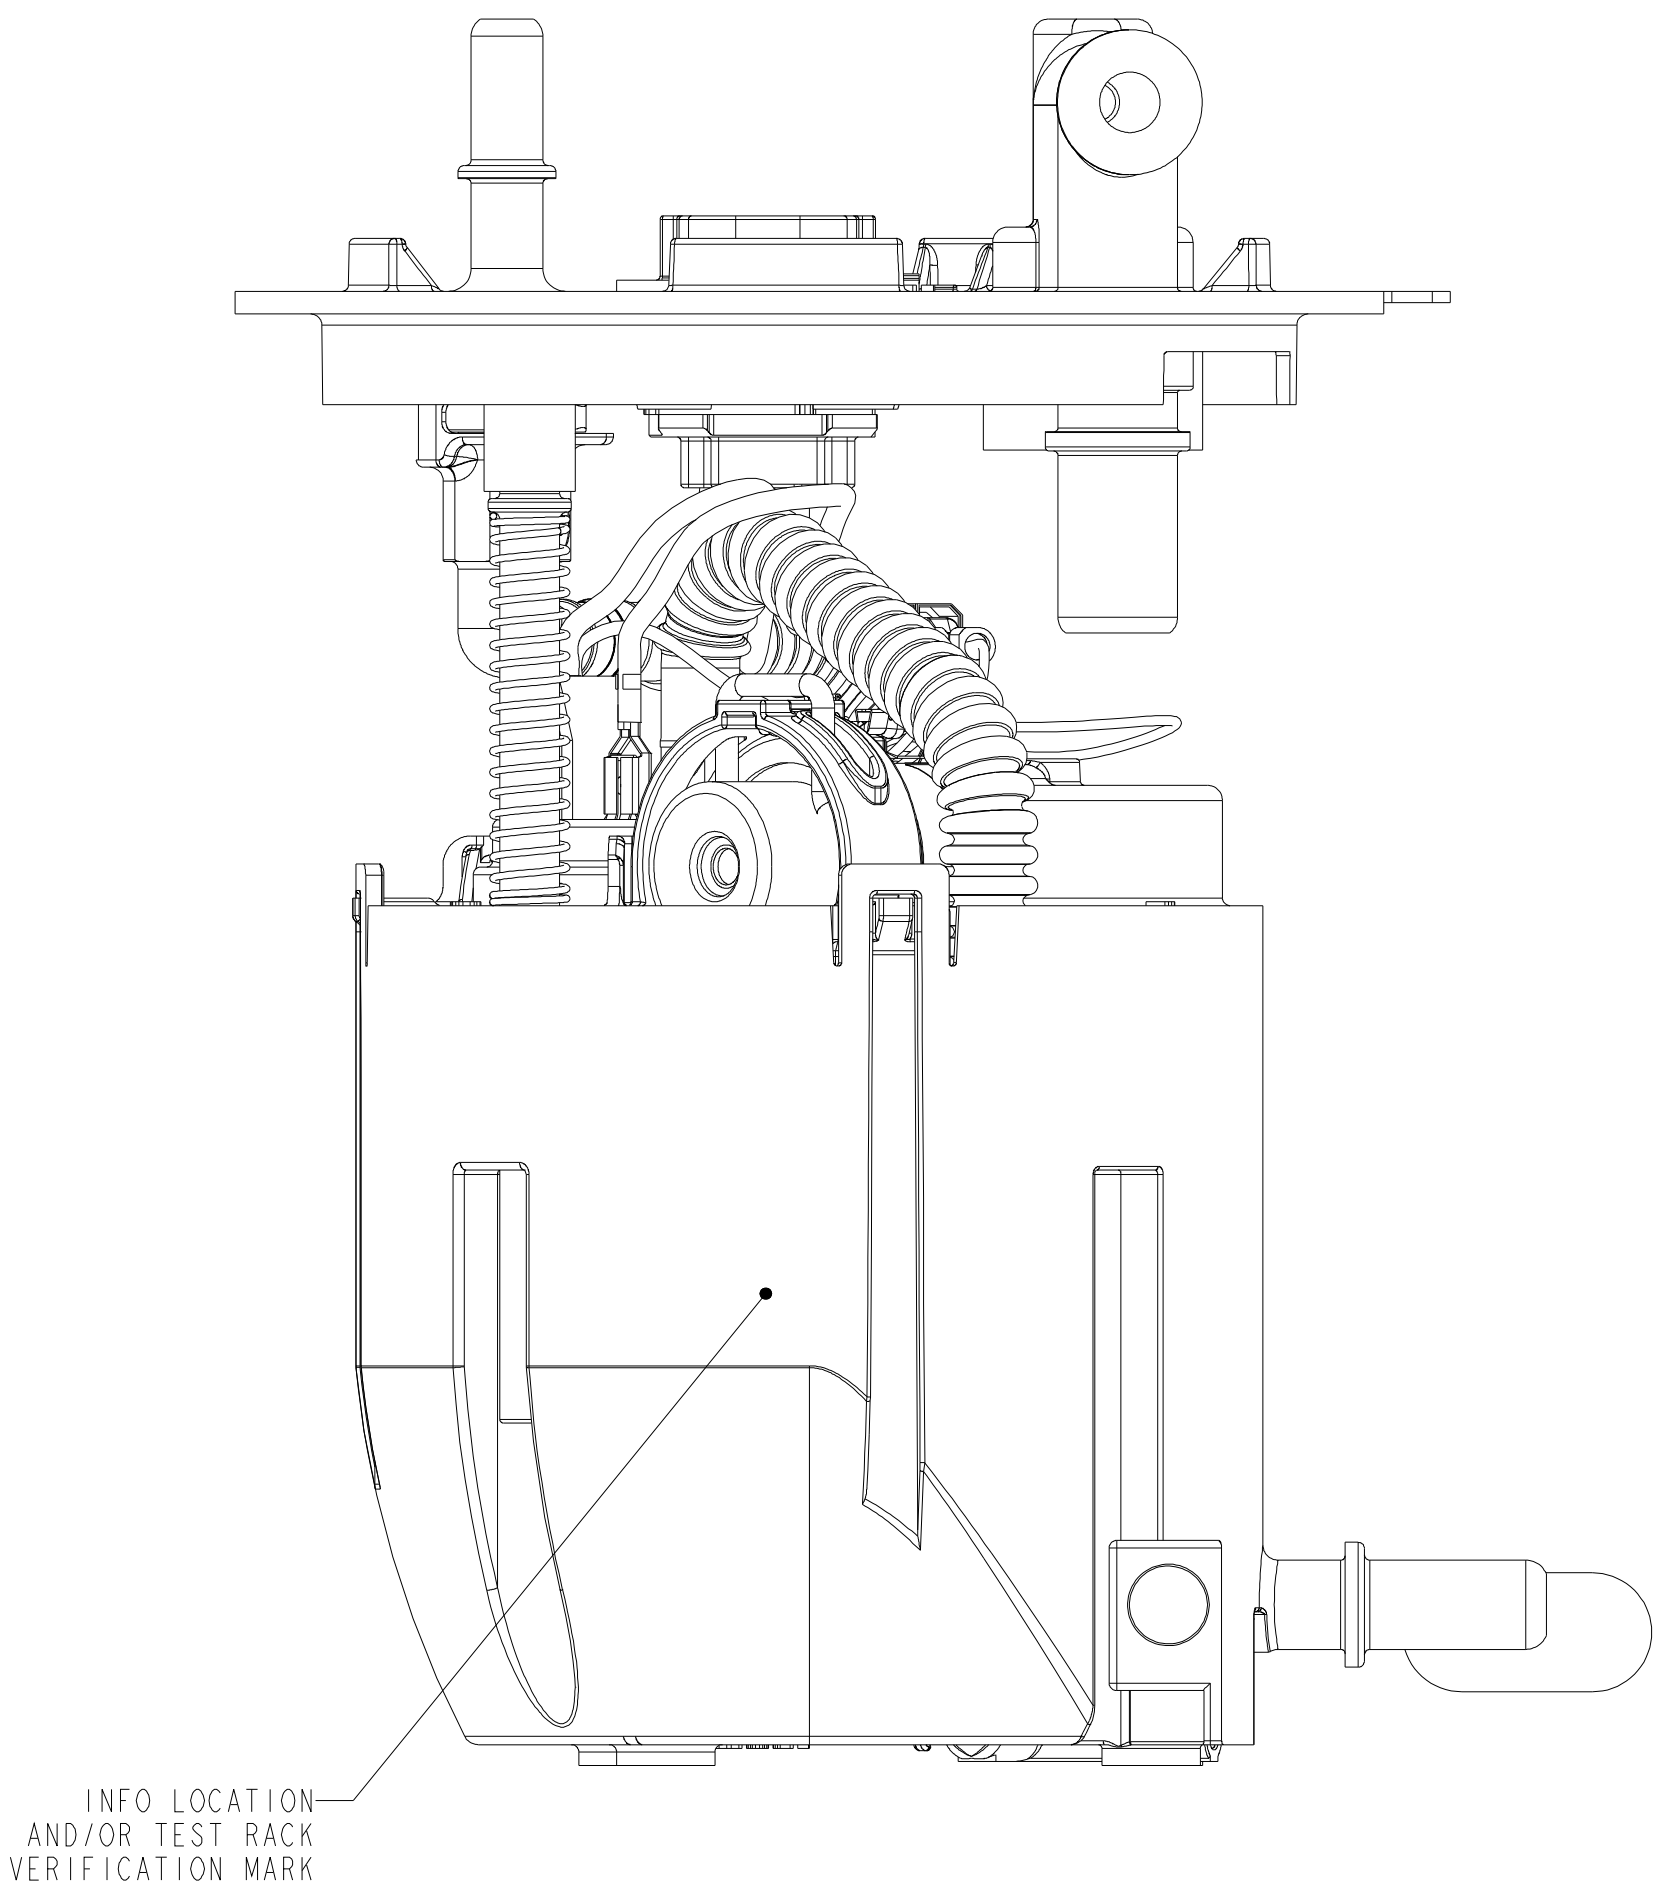
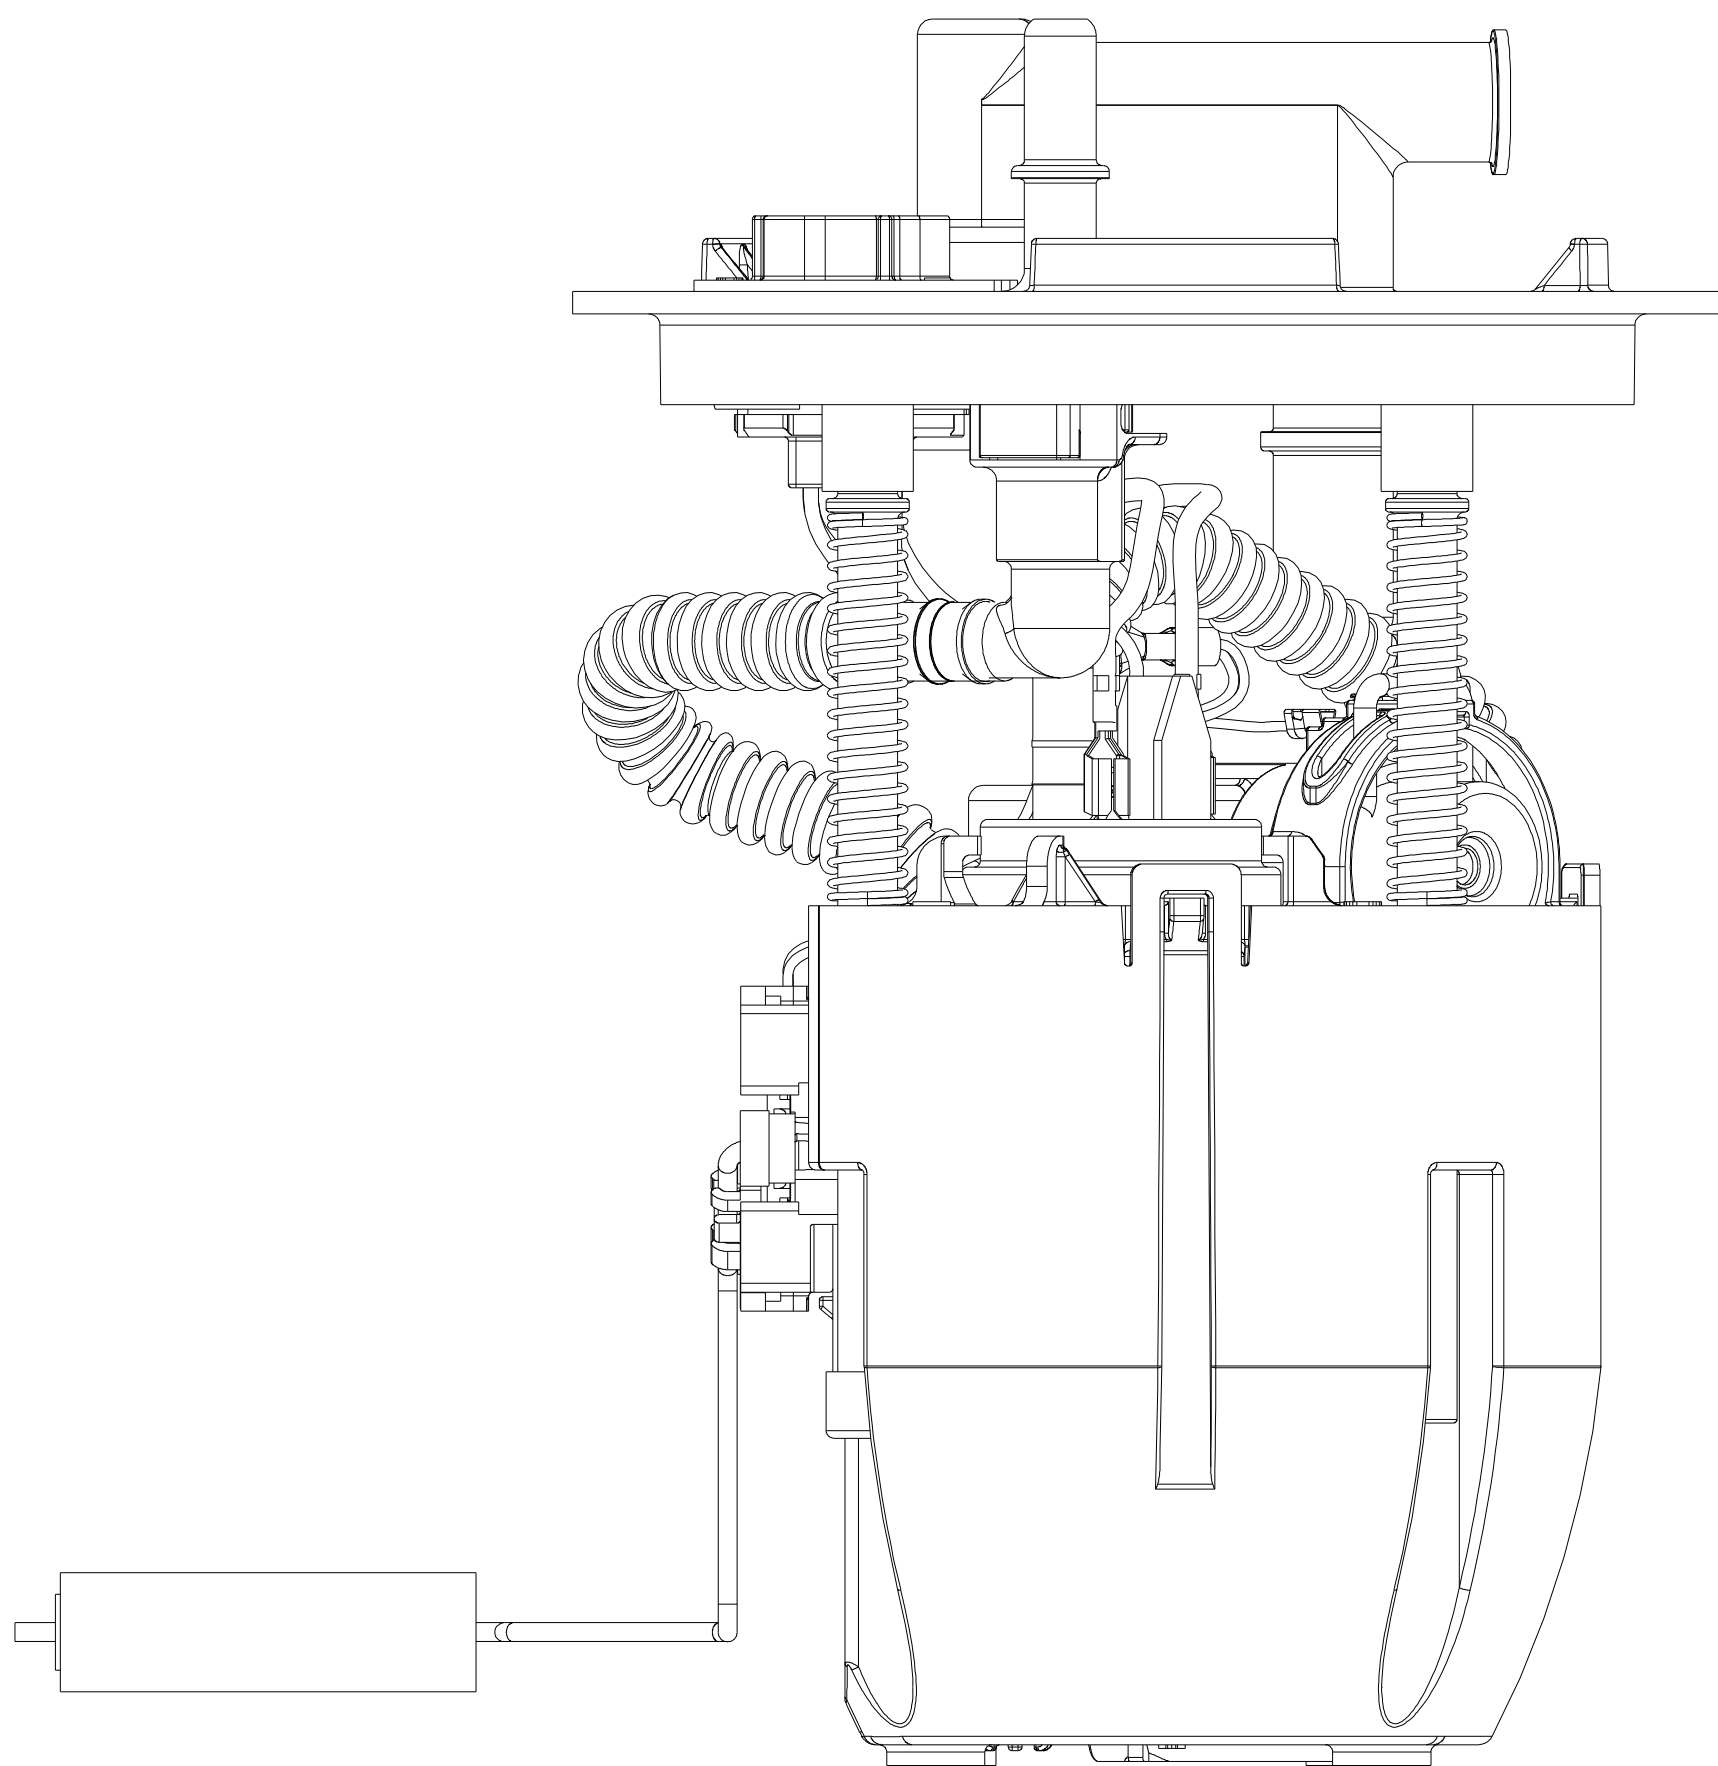


REVISIONS						
ZONE	LTR	DESCRIPTION	CHANGE No	DATE	BY	APPR'D
	AA	INITIAL RELEASE	DR56148	09FEB16	SLK	DJC
	AB	CHG VLV TO ITR, UPDATE COMPONENTS	DR60158	10OCT16	SLK	DJC
	AC	AC1 ADDED ESD GROUND AC2 CHANGED PUMP AC3 UPDATED FLANGE	DR6254T	14AUG17	SLK	DJC

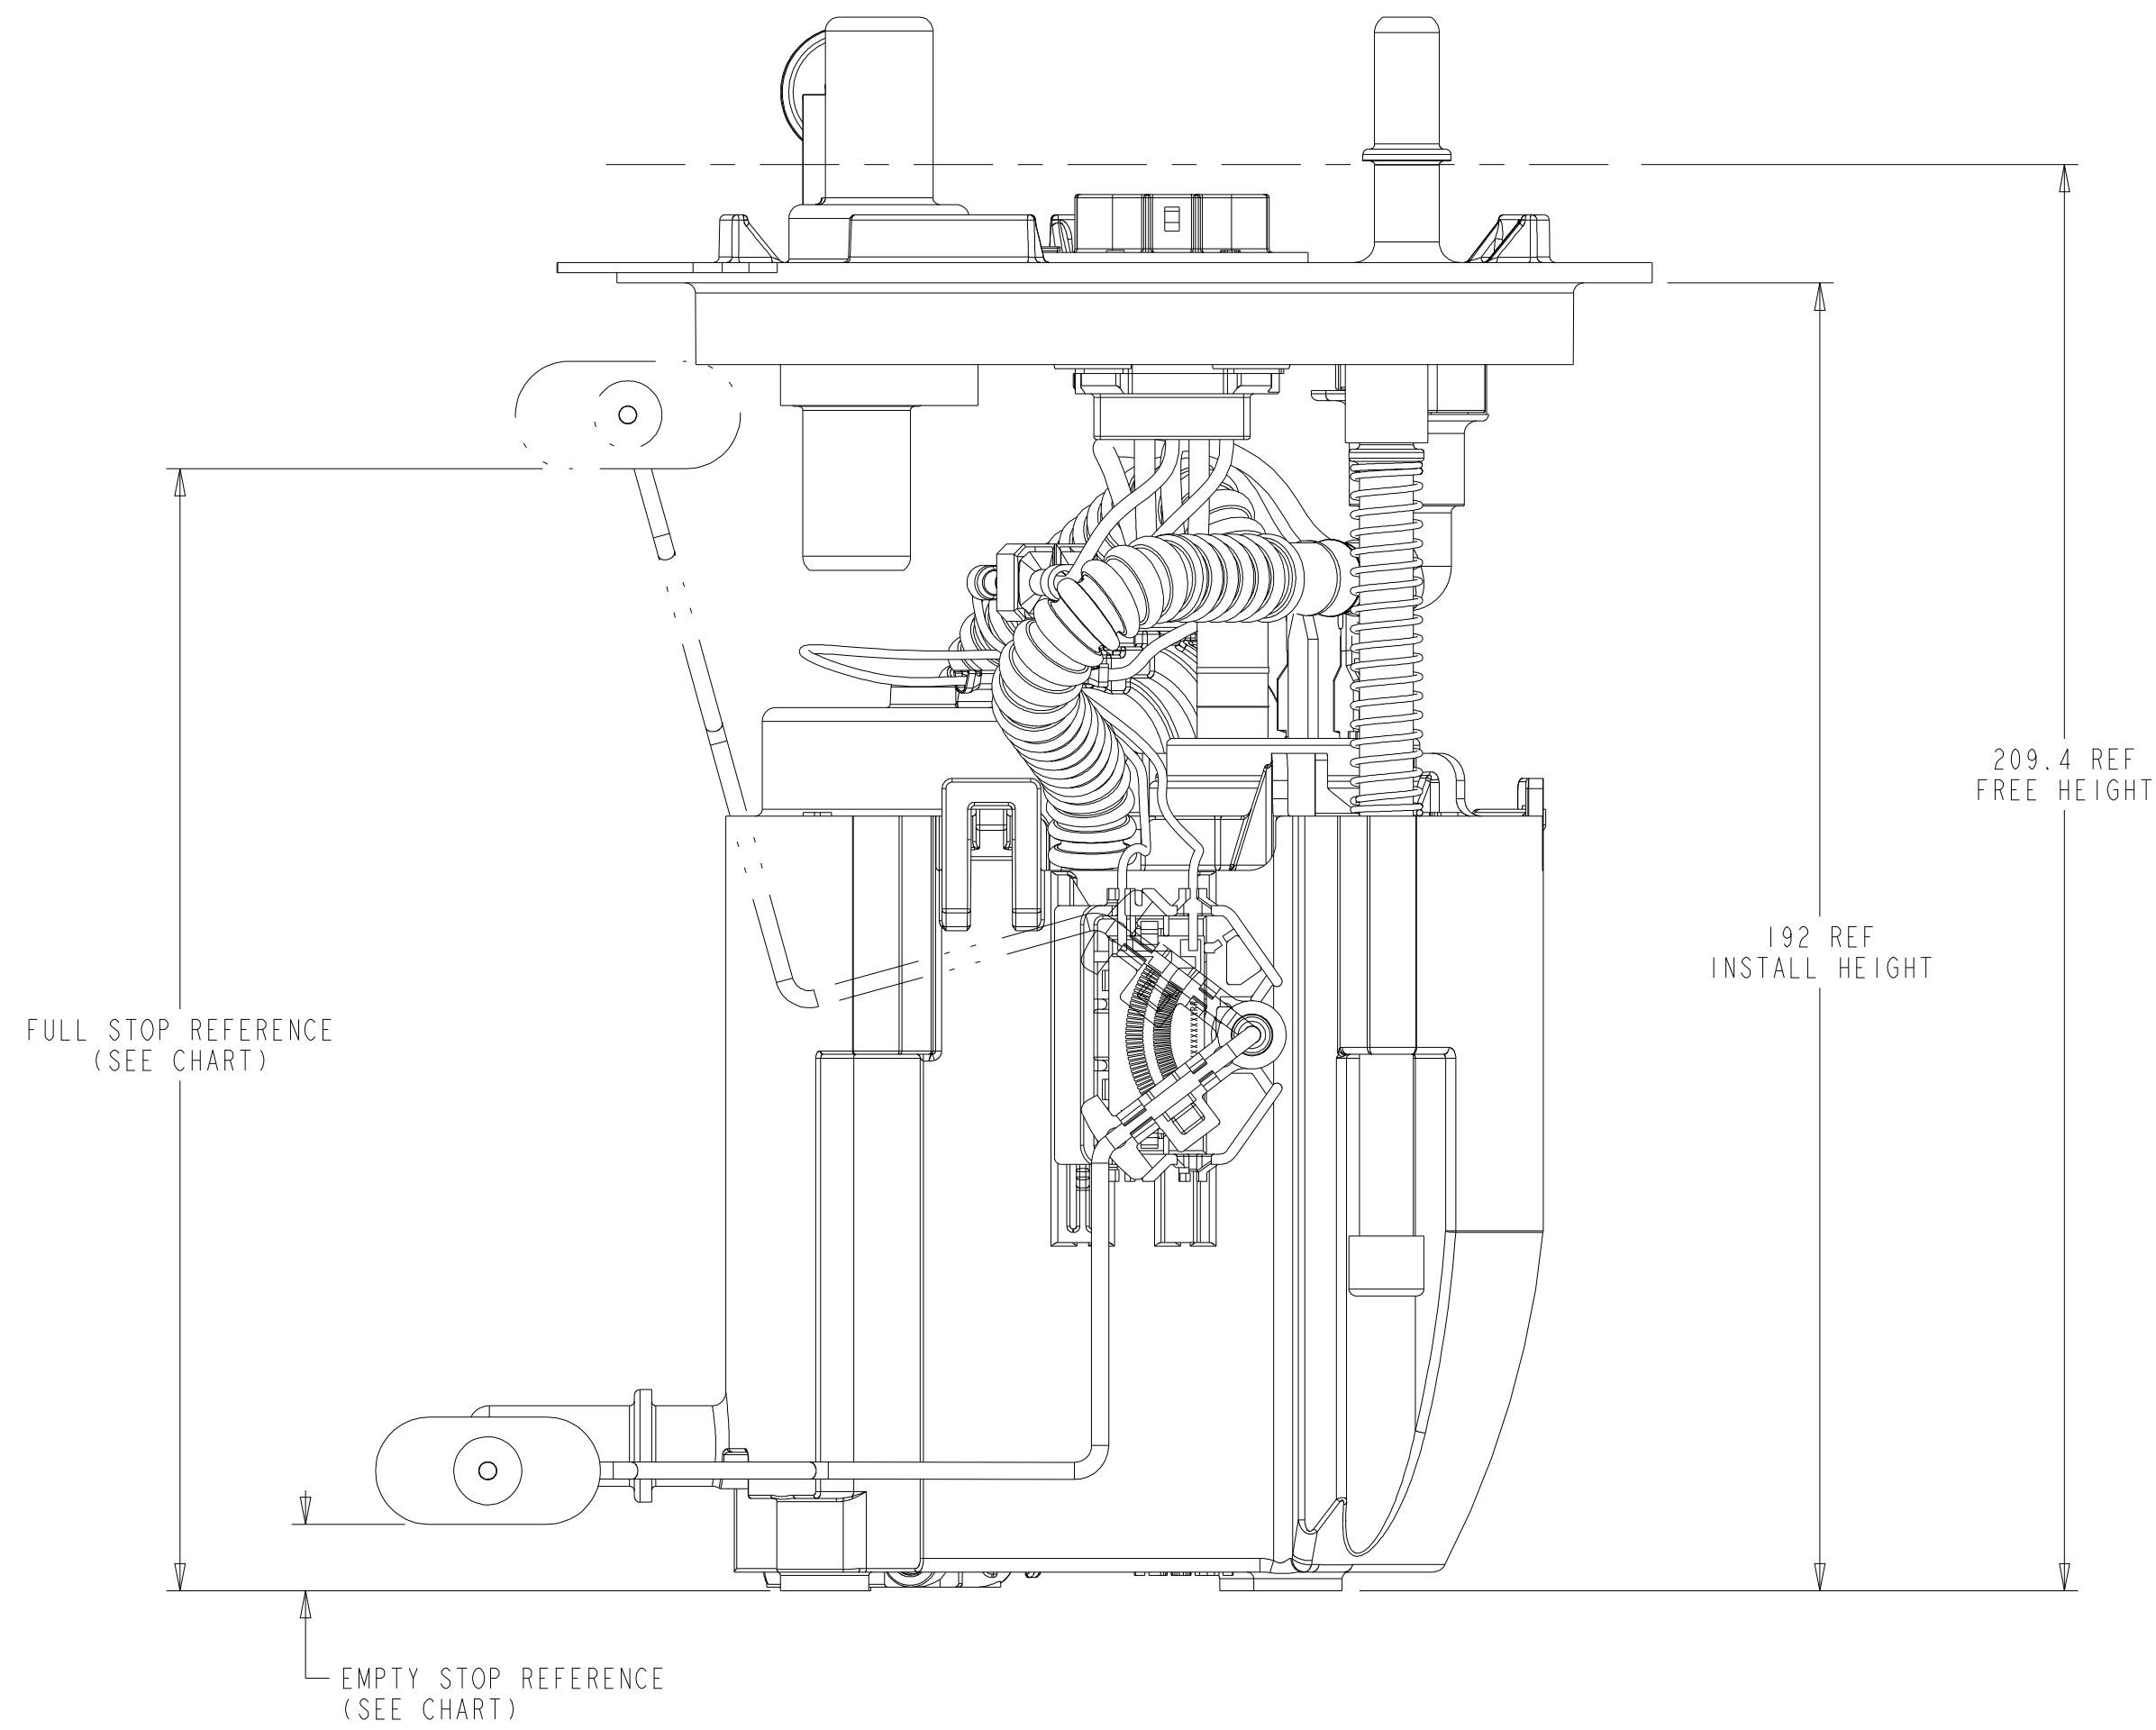

DETAIL X
SCALE 2:1

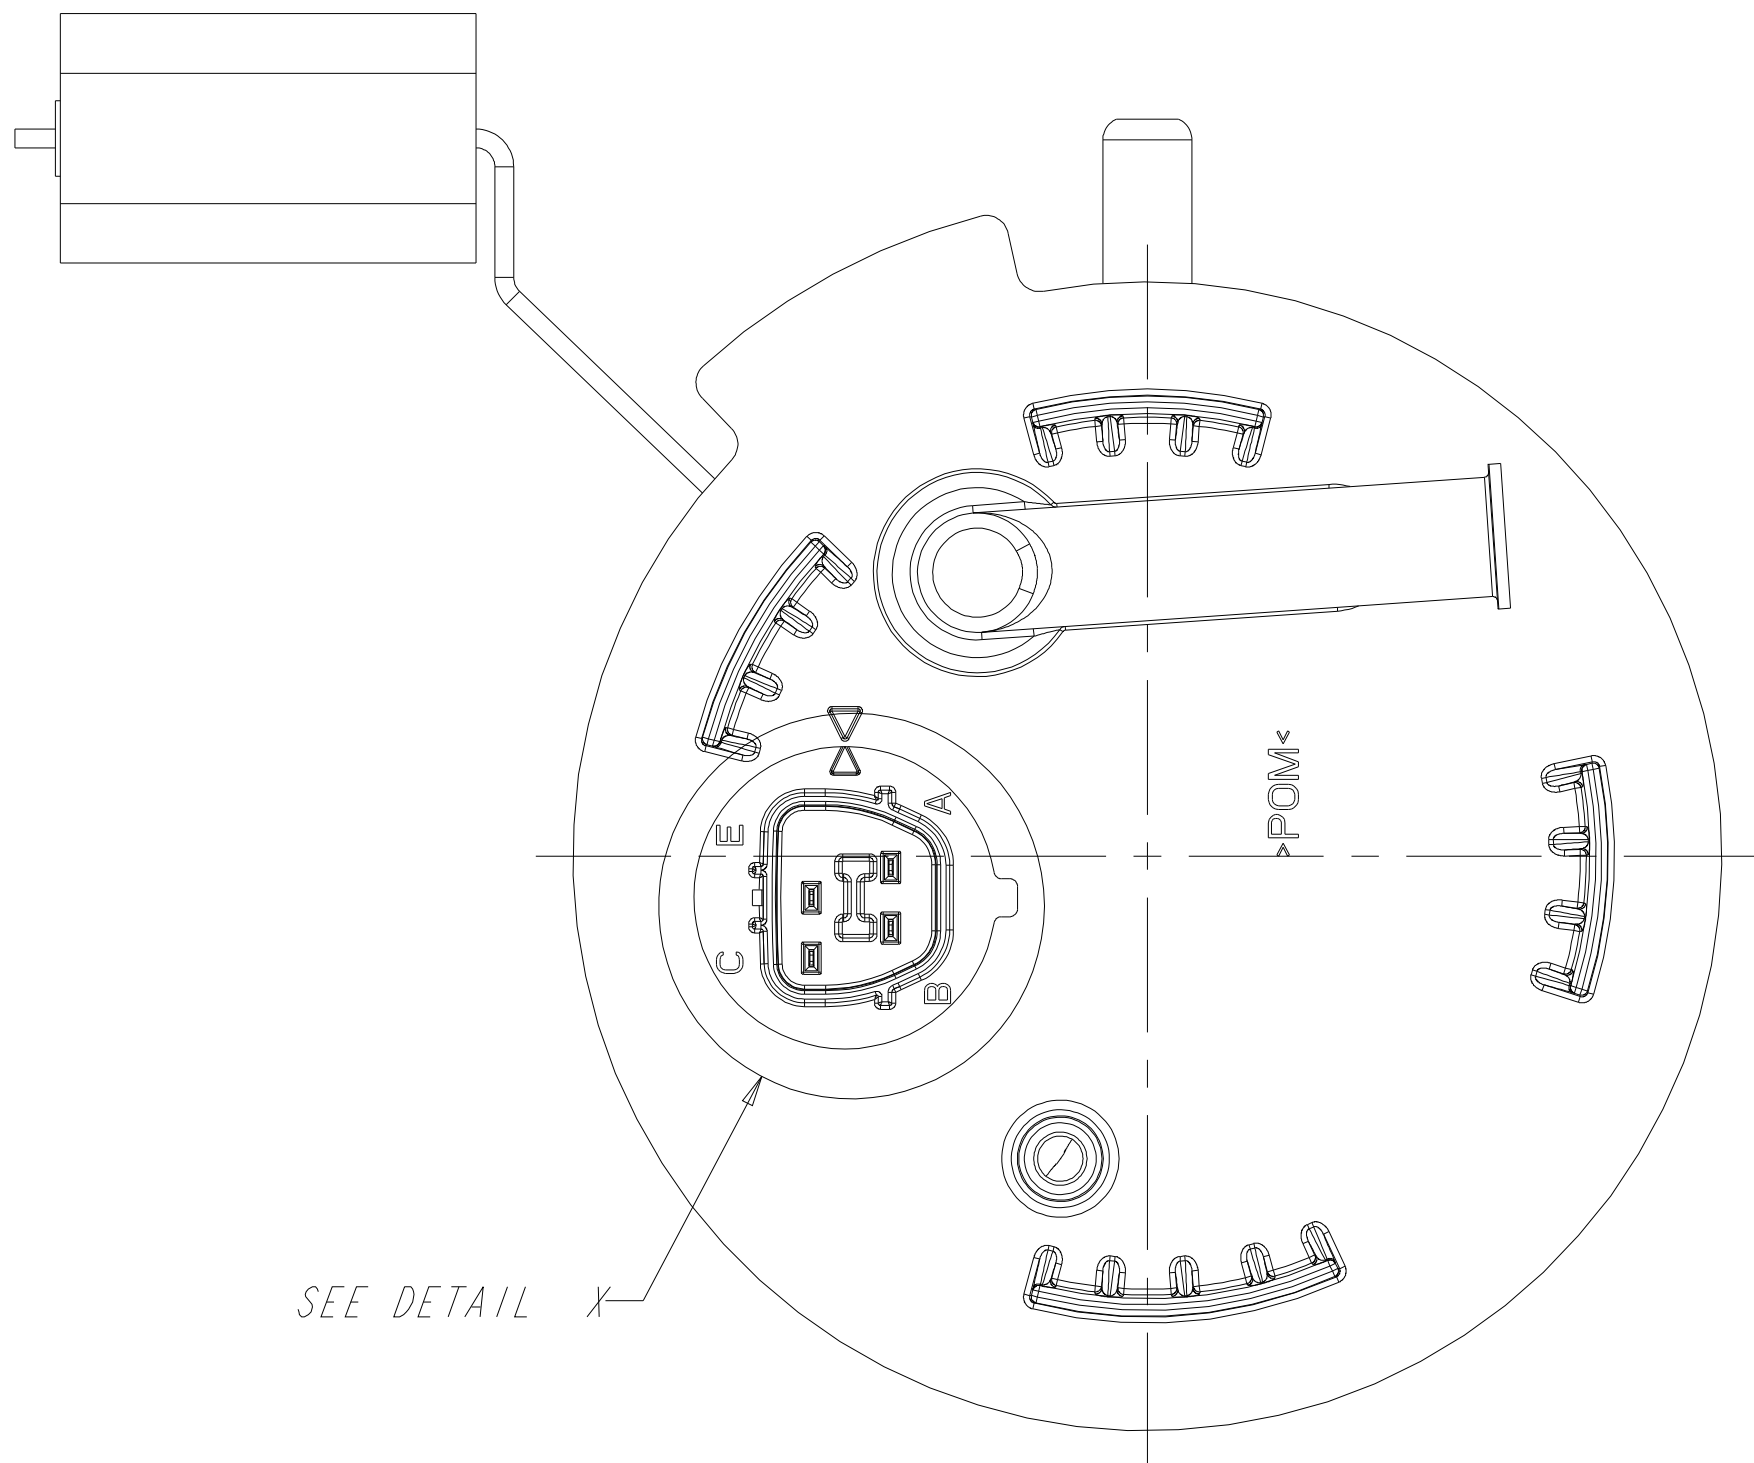


LEVEL SENDER UNIT HEIGHT VS RESISTANCE		
FLOAT POSITION	HEIGHT (mm)	RESISTANCE (Ohms)
FULL STOP	164.7 REF	10 ± 2
EMPTY STOP	9.5 REF	180 ± 4

NOTES:

- SPECIAL CUSTOMER PACKAGING REQUIREMENTS MAY CALL FOR THE ADDITION OF SPECIFIC LABELS NOT SHOWN ON THIS DRAWING.
- MODULE TO BE PACKAGED USING COMPONENTS NOTED ON BOM SO THAT CONTAMINATION FROM FOREIGN MATERIAL IS PREVENTED:
 - PLUG PROTECTORS ON PORTS
 - POLY BAG
- SHOWN WIRE ROUTING MAY DIFFER FROM FINISHED PRODUCT.

KEY PRODUCT CHARACTERISTICS			
REFER TO TI AUTOMOTIVE GLOBAL ADVANCED QUALITY PLANNING AGREEMENT A-7752-001-0011 FOR THE CLASSIFICATION AND CONTROL OF KEY PRODUCT CHARACTERISTICS	DATE	ISSUE	REVISION
✓ SAFETY CHARACTERISTIC	---	---	---
◇ CRITICAL CHARACTERISTIC	---	---	---
⊞ HIGH IMPACT CHARACTERISTIC	---	---	---

METRIC ALL DIMENSIONS ARE IN MILLIMETERS		
DO NOT SCALE		
DECIMAL TOLERANCES UNLESS OTHERWISE SPECIFIED: ONE PLACE ±0.25 TWO PLACE ±0.13 ANGLES ±1°		
THIRD ANGLE PROJECTION		
DIMENSIONS IN ACCORDANCE WITH ASME Y14.5 - 2009		
		
630 COLUMBIA ST. CARO, MI 48723 +1 989.675.1723		
ENGINEER: D.CATLIN	09FEB16	MATERIAL/SPECIFICATION: SEE NOTES
DESIGNER: S.RADY	09FEB16	
CAD SYSTEM: PROVE	SCALE: 1:1	SHEET NO. 1 OF 1
REFERENCE TO: AR0041303/AC		
REFERENCE TO: AR0041301/AC		
FUEL MODULE OUTLINE		
SIZE: A0	DRAWING NUMBER: TU2026	