

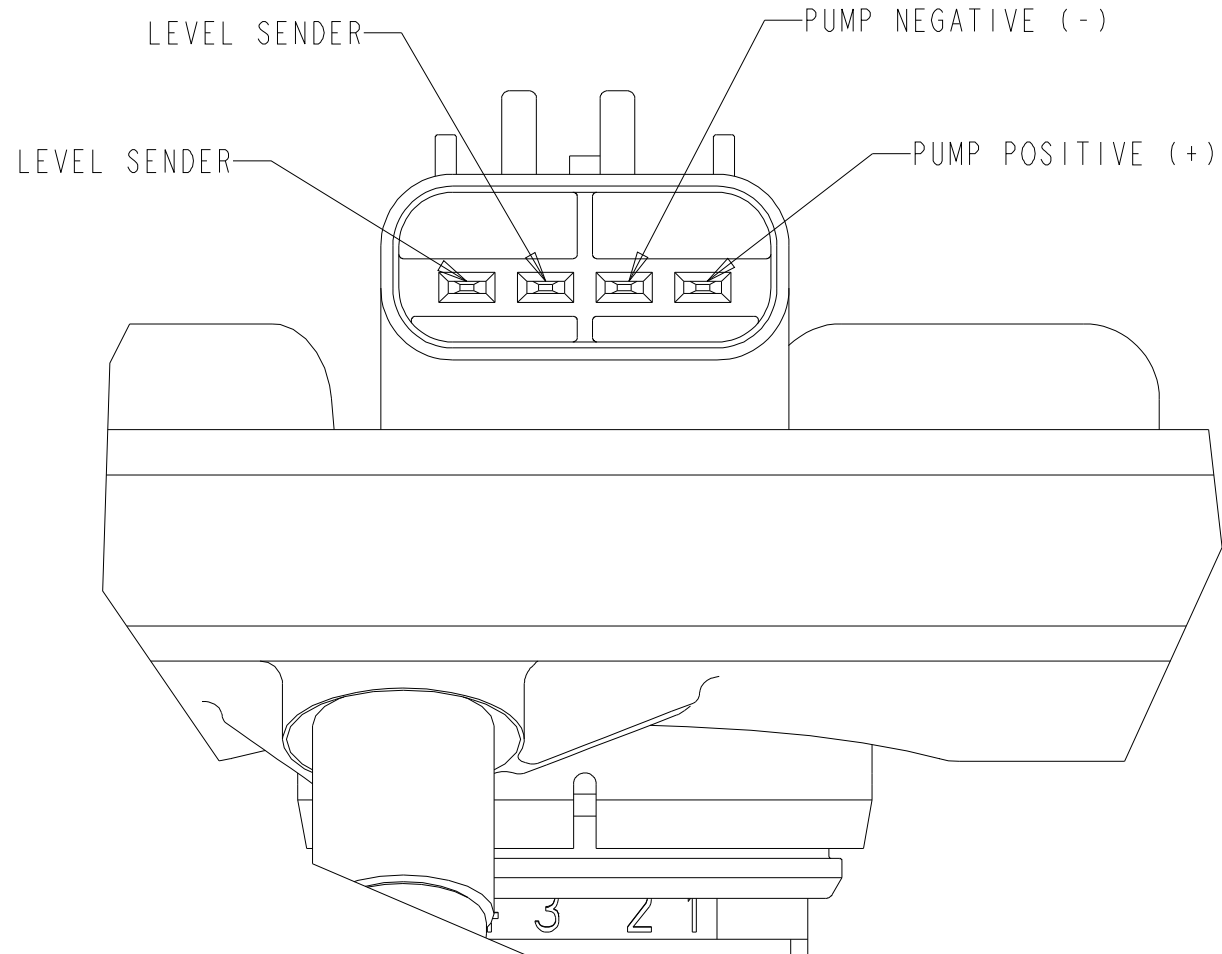
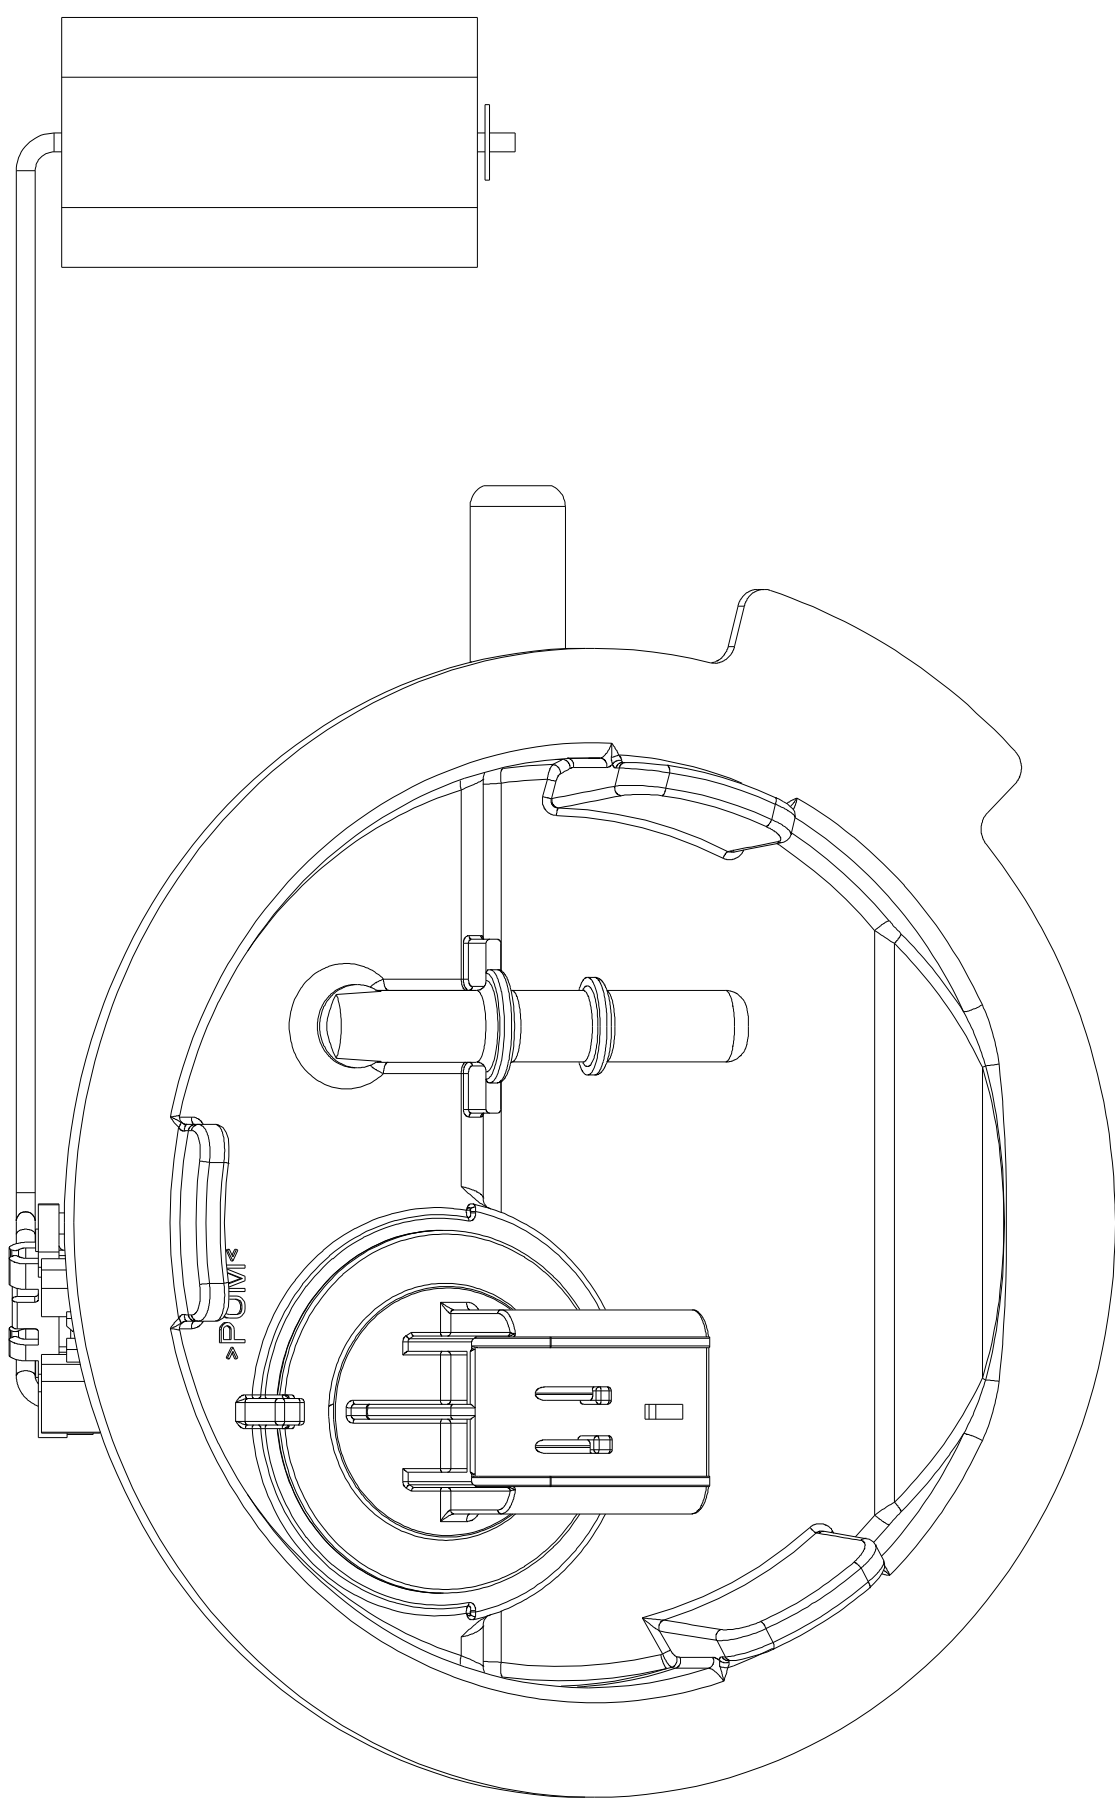


| REVISIONS | | | | | | |
|-----------|-----|-----------------|-----------|---------|-----|--------|
| ZONE | LTR | DESCRIPTION | CHANGE No | DATE | BY | APPR'D |
| AA | | INITIAL RELEASE | DR62327 | 03APR17 | RMB | BLM |

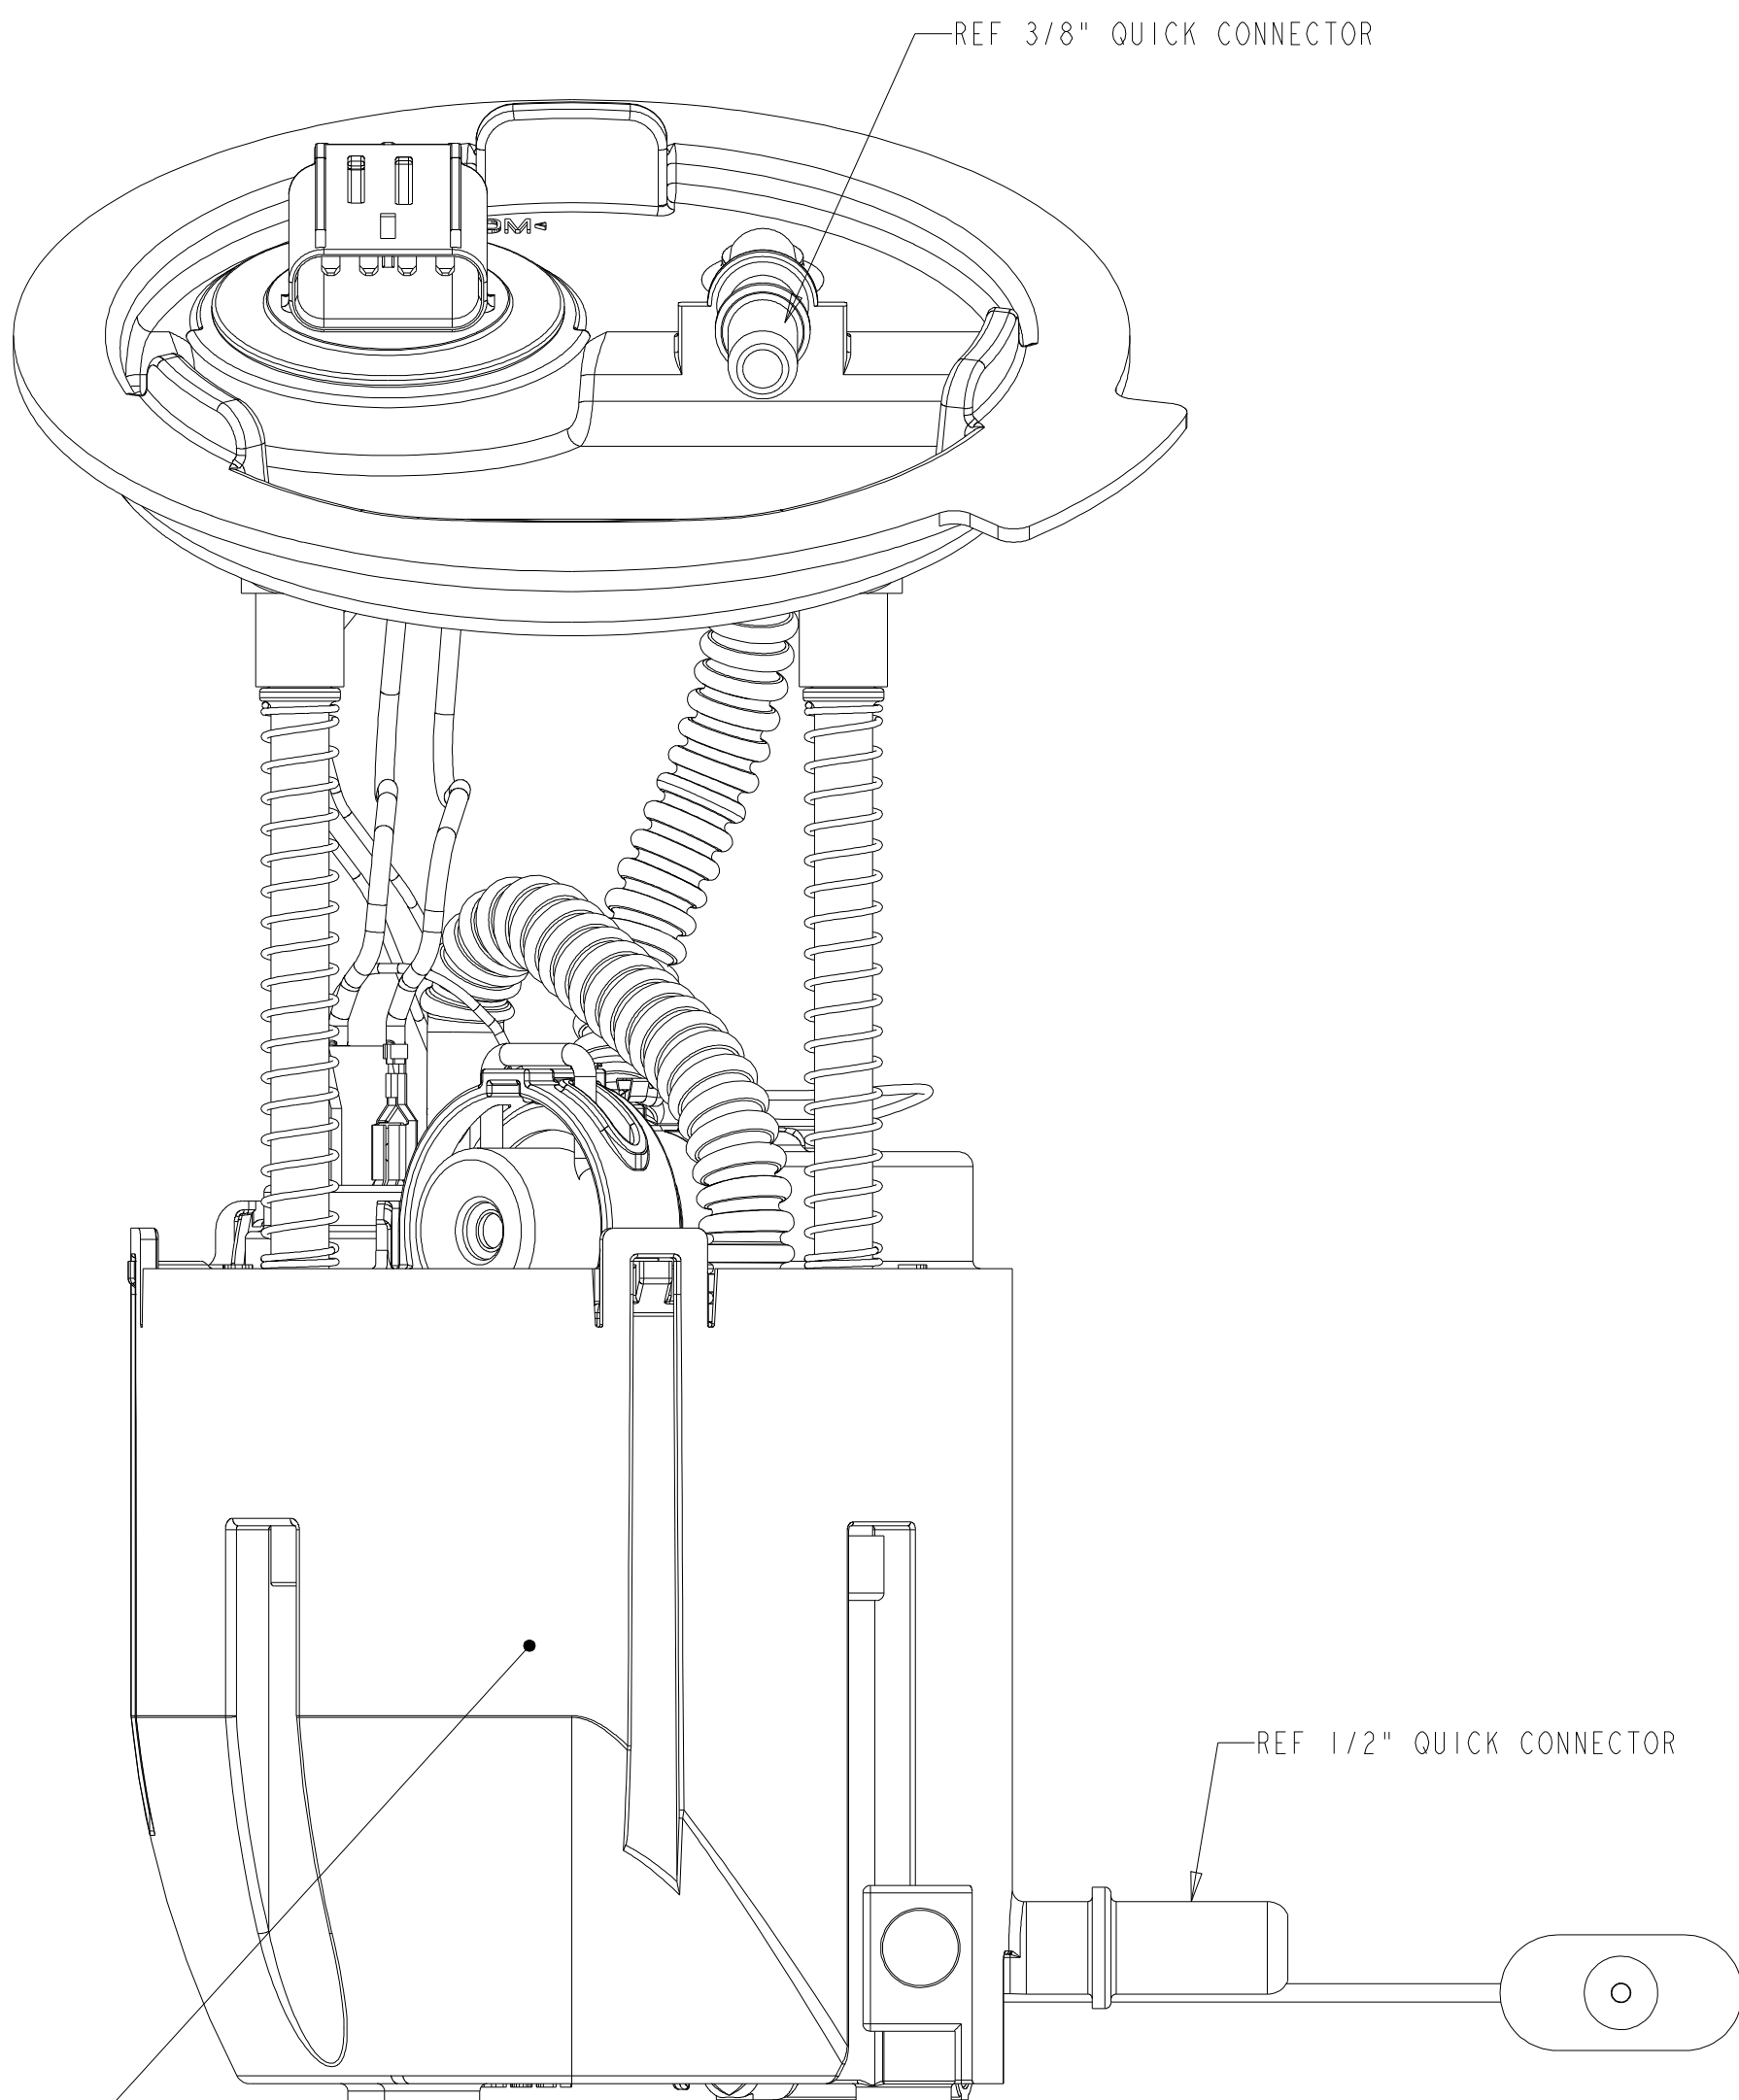


VIEW IN DIRECTION
OF ARROW "X"
SCALE 2:1

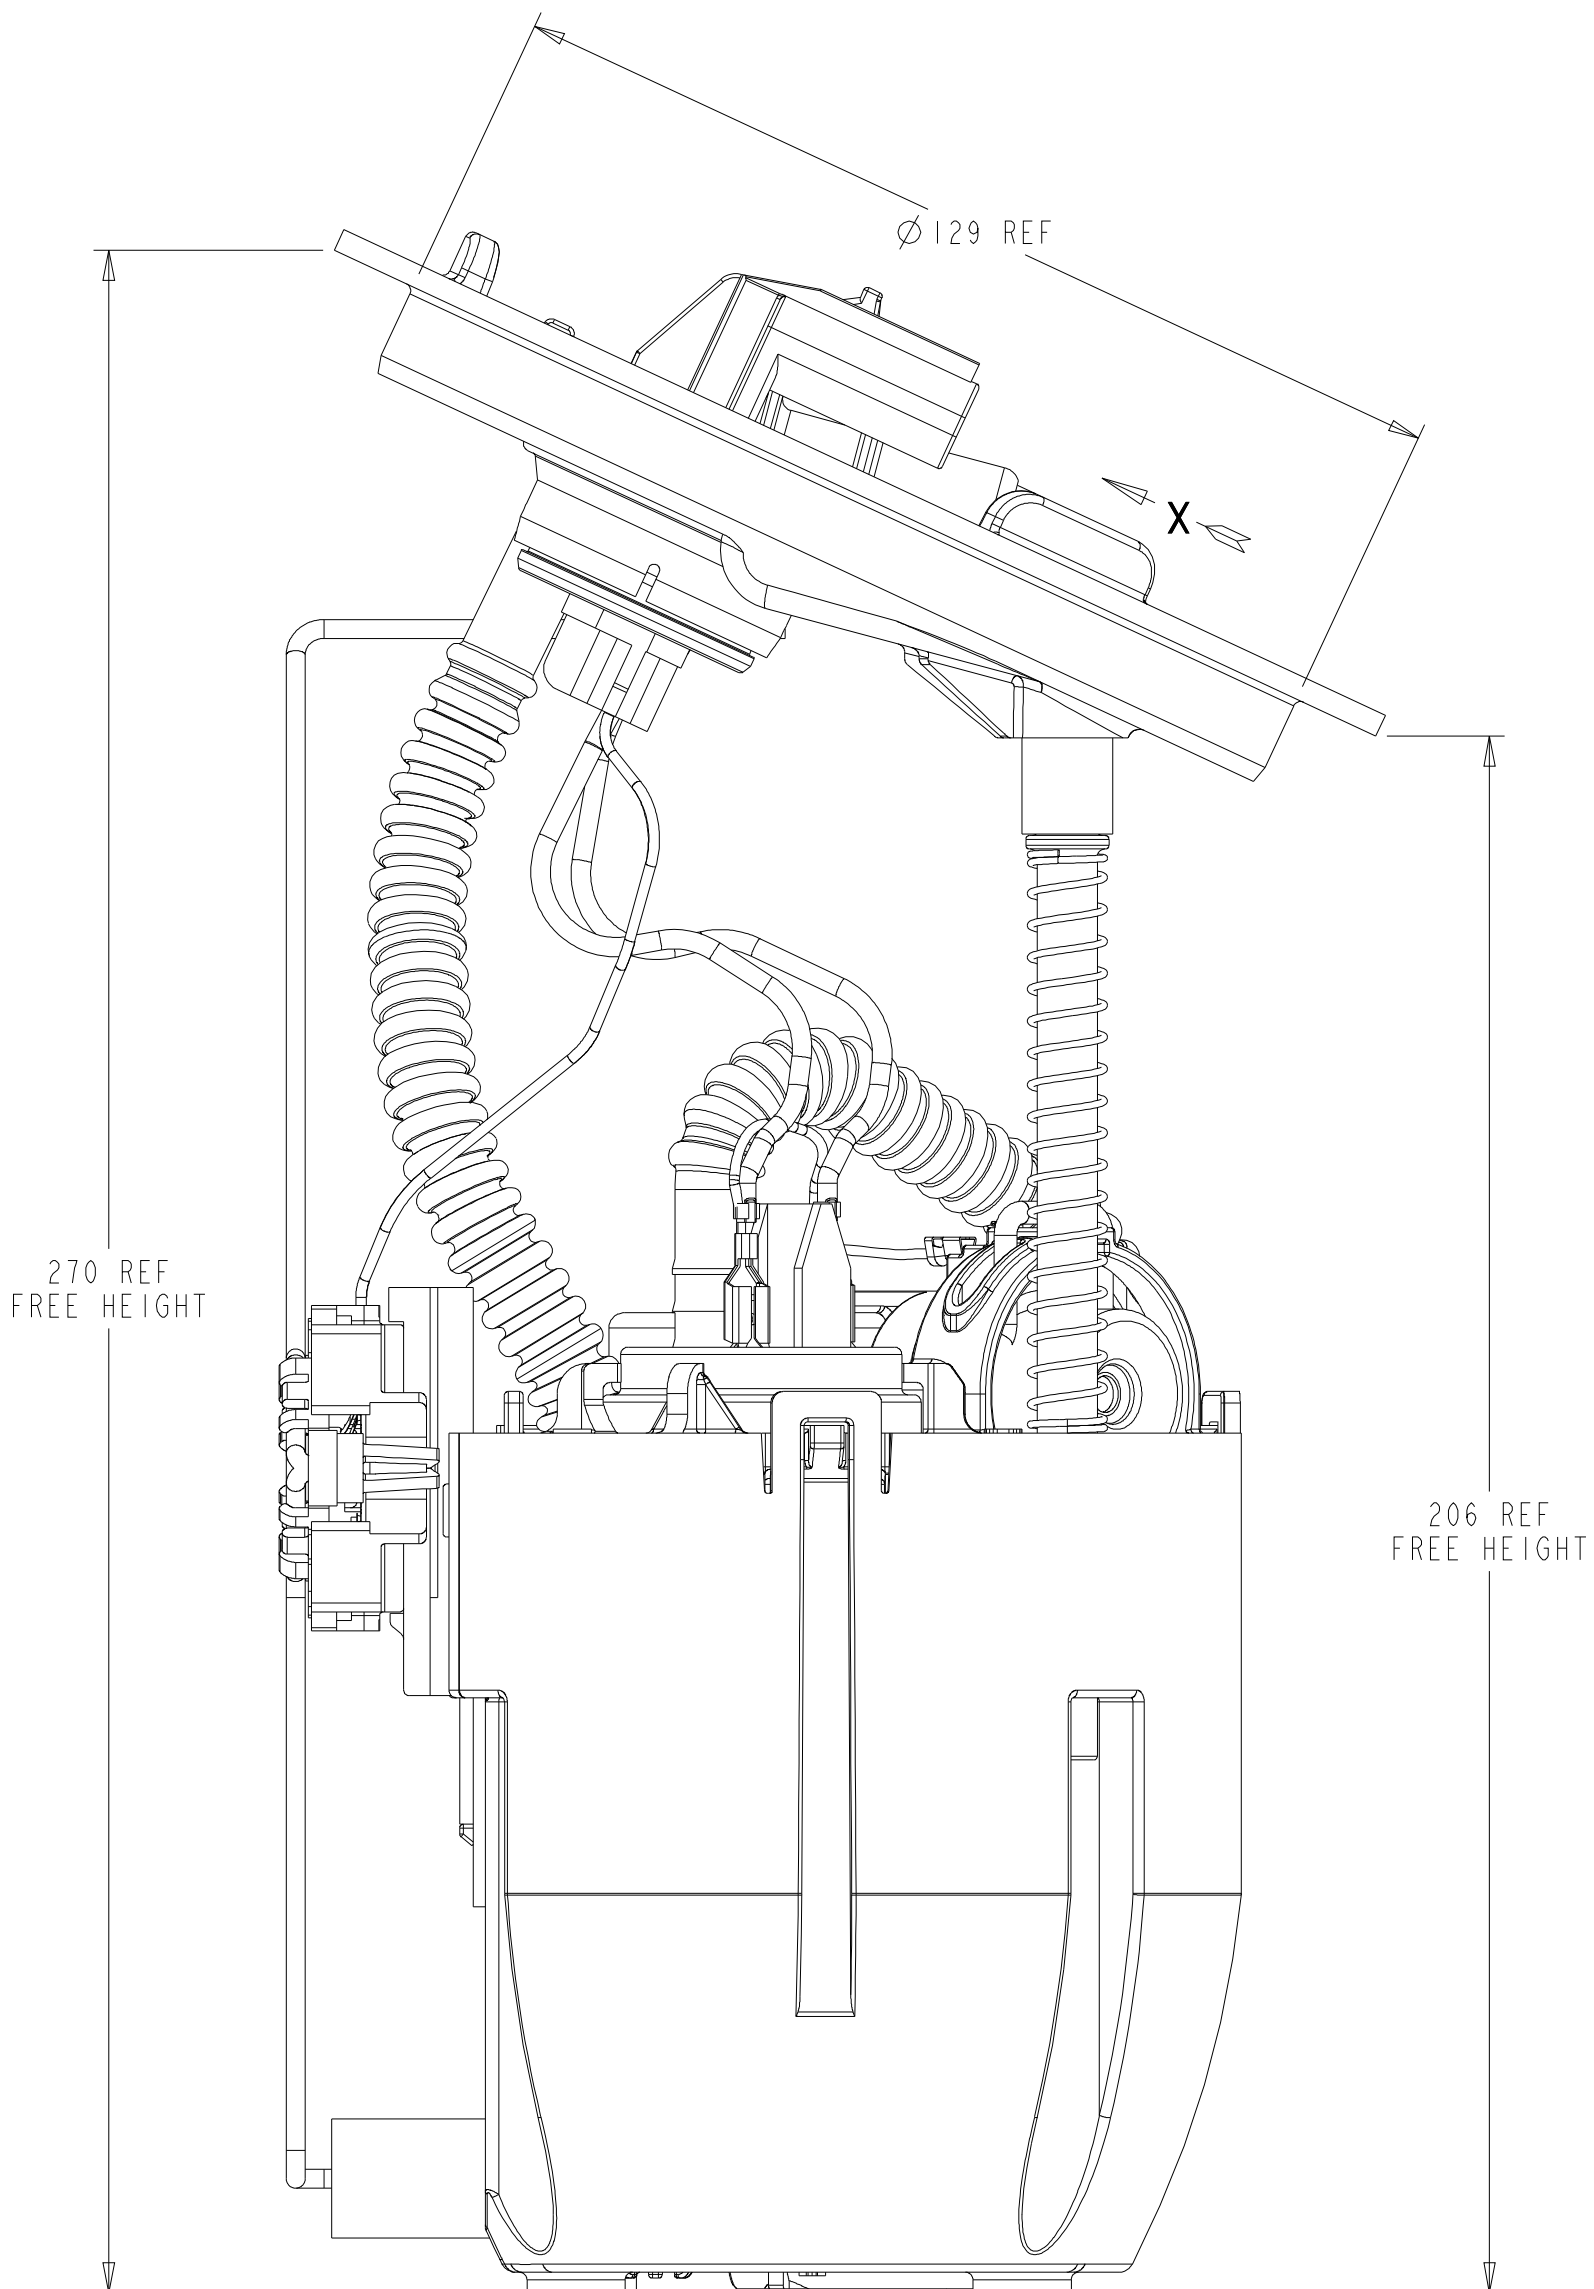

| LEVEL SENDER UNIT HEIGHT VS. RESISTANCE | | |
|--|----------------|----------------------|
| FLOAT POSITION | HEIGHT (mm) | RESISTANCE (Ohms) |
| FULL STOP | 212 REF | 10 ± 2 |
| EMPTY STOP | 7.5 REF | 180 ± 4 |

- NOTES:
- SPECIAL CUSTOMER PACKAGING REQUIREMENTS MAY CALL FOR THE ADDITION OF SPECIFIC LABELS NOT SHOWN ON THIS DRAWING.
 - MODULE TO BE PACKAGED USING COMPONENTS NOTED ON BOM SO THAT CONTAMINATION FROM FOREIGN MATERIAL IS PREVENTED:
 - PLUG PROTECTORS ON PORTS
 - POLY BAG
 - SHOWN WIRE ROUTING MAY DIFFER FROM FINISHED PRODUCT.

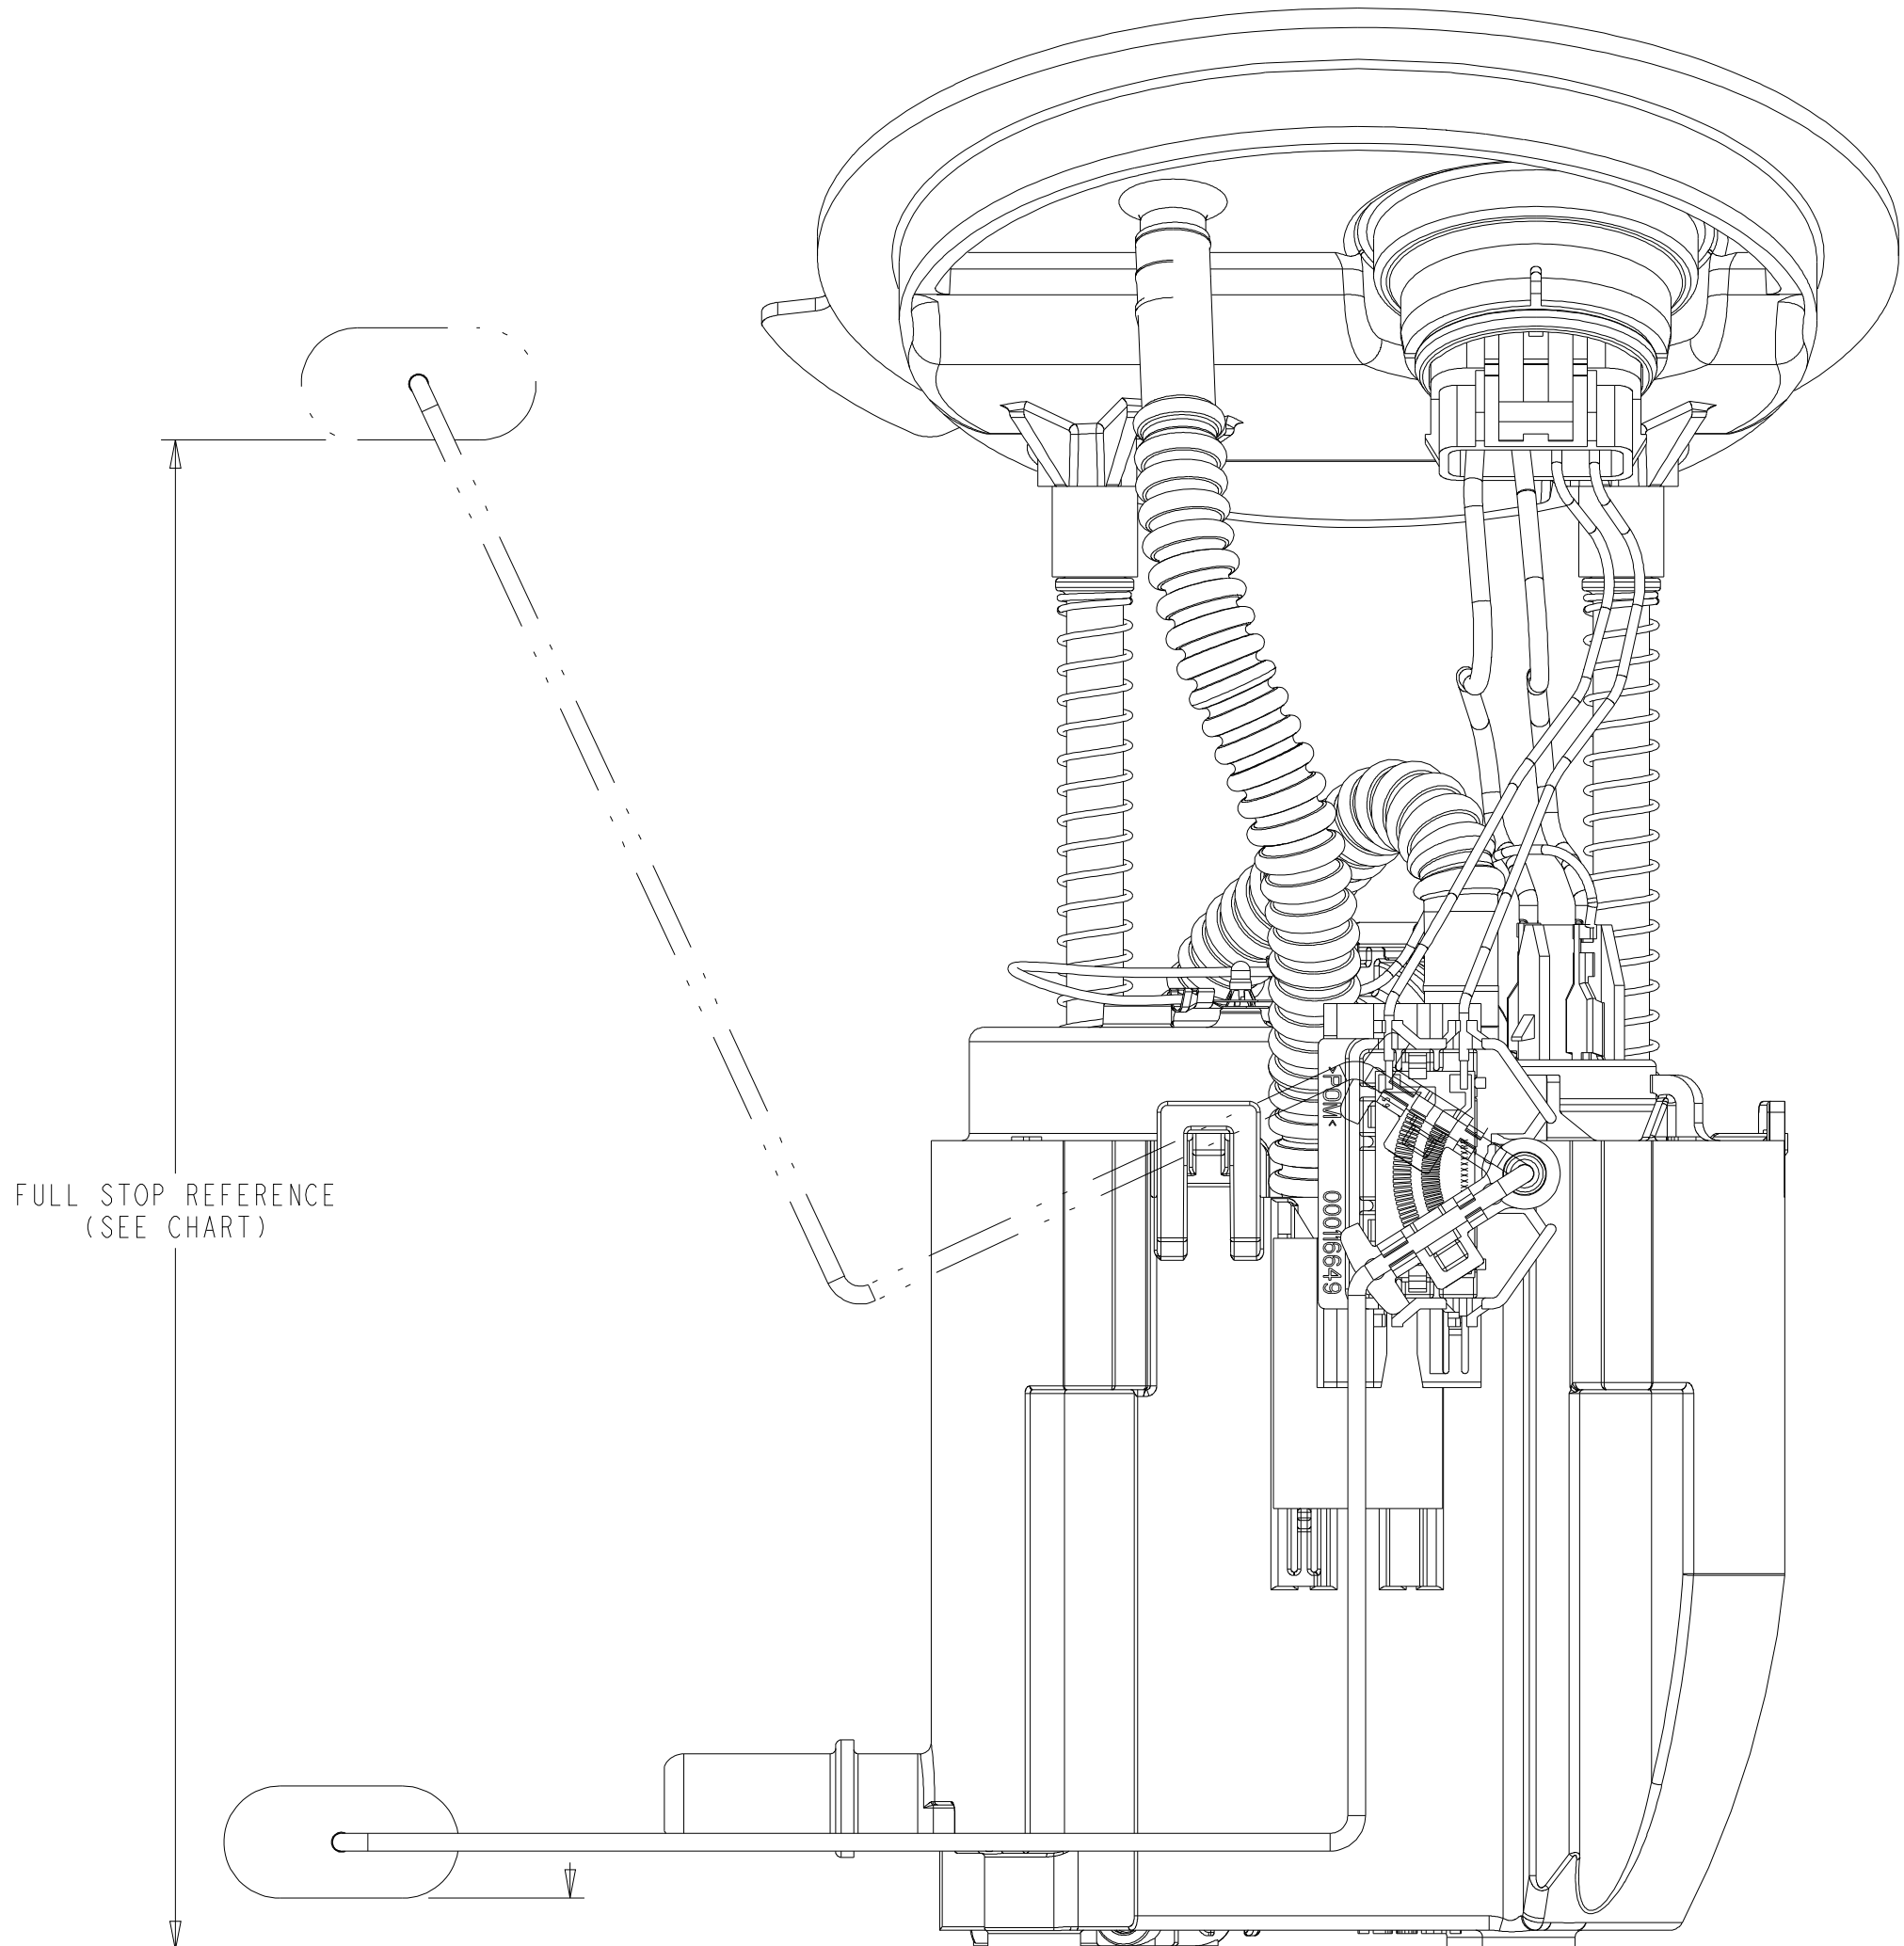

| METRIC ALL DIMENSIONS ARE IN MILLIMETERS | | |
|--|------------------------|-------------------------|
| DO NOT SCALE | | |
| DECIMAL TOLERANCES UNLESS OTHERWISE SPECIFIED: ONE PLACE ±0.25 TWO PLACE ±0.13 ANGLES ±1° | | |
| THIRD ANGLE PROJECTION | | |
| DIMENSIONS IN ACCORDANCE WITH ASME Y14.5 - 2009 | | |
| | | |
| 630 COLUMBIA ST. CARO, MI 48723 41 989.673.1727 | | |
| ENGINEER: B.MIDDLETON | 24MAR2017 | MATERIAL/SPECIFICATION: |
| DESIGNER: R.BRUBAKER | 24MAR2017 | |
| CAD SYSTEM: PRO/E | SCALE: 1:1 | SHEET NO. 1 OF 1 |
| REFERENCE TO: 20: AR0045662/AA | | |
| REFERENCE TO: 3D: AR0045660/AA | | |
| FUEL MODULE OUTLINE | | |
| SIZE: A0 | DRAWING NUMBER: TU2038 | |

| KEY PRODUCT CHARACTERISTICS | | |
|--|-----|------|
| REFER TO TI AUTOMOTIVE GLOBAL ADVANCED QUALITY PLANNING DOCUMENT A-7352-01-1-001 FOR THE CLASSIFICATION AND CONTROL OF KEY PRODUCT CHARACTERISTICS | DRN | DATE |
| ✓ - SAFETY CHARACTERISTIC | --- | --- |
| ⊕ - CRITICAL CHARACTERISTIC | --- | --- |
| ⊞ - HIGH IMPACT CHARACTERISTIC | --- | --- |