




Hood Protector 8038H

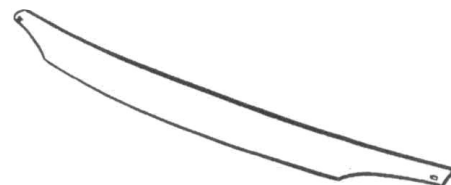

Fit: 1997-2002
1997-2003
2004

Ford Expedition
Ford F-150
Ford F-150 Heritage



PHILLIPS SCREW DRIVER REQUIRED FOR INSTALLATION



REMOVE CONTENTS FROM BOX. VERIFY ALL PARTS ARE PRESENT.



READ INSTRUCTIONS CAREFULLY BEFORE STARTING INSTALLATION.



30-60 min



CUTTING NOT
REQUIRED



DRILLING
REQUIRED



support@trailfx.com



1 866 638 4870



LIMITED LIFETIME

Important Safety Information

- **CAUTION** - Before driving, ensure that the hood shield is properly secured to vehicle.
- Do not use automatic "brush-style" car washes.
- Do not use cleaning solvents of any kind.
- Periodically check all components for tightness.

NOTE: Actual product may vary from illustration.

Qty	Description
01	Hood Protector
01	Alcohol Pad

Qty	Description
01	Hardware Kit

Tools Required



Car Wash Supplies



Clean Towel











Phillips
screwdriver

Preparation Before Painting / Installation


- A trial fit is recommended to ensure proper positioning and fit.
- Check fit of parts before painting as we will not accept the return of modified or painted parts.
- Wash and dry your vehicle to remove any debris and/or dirt from the installation area.

INSTALLATION STEPS

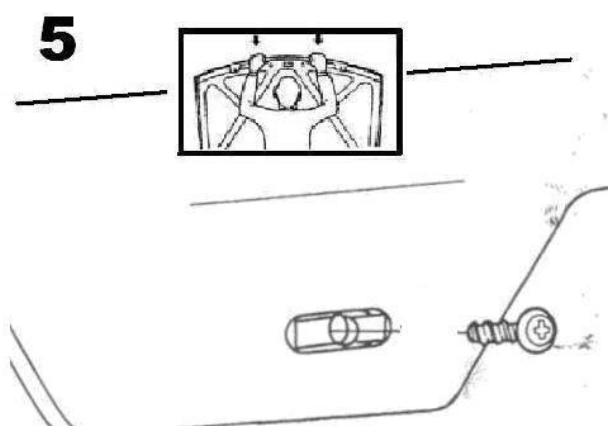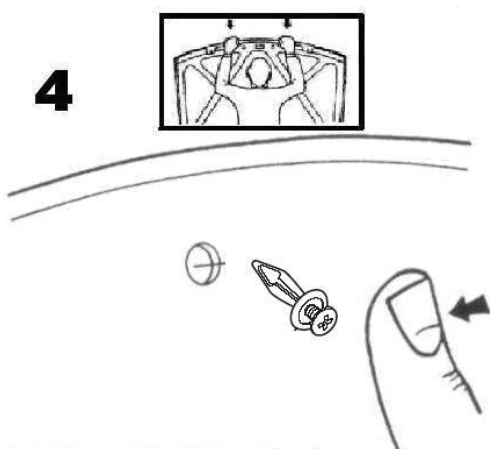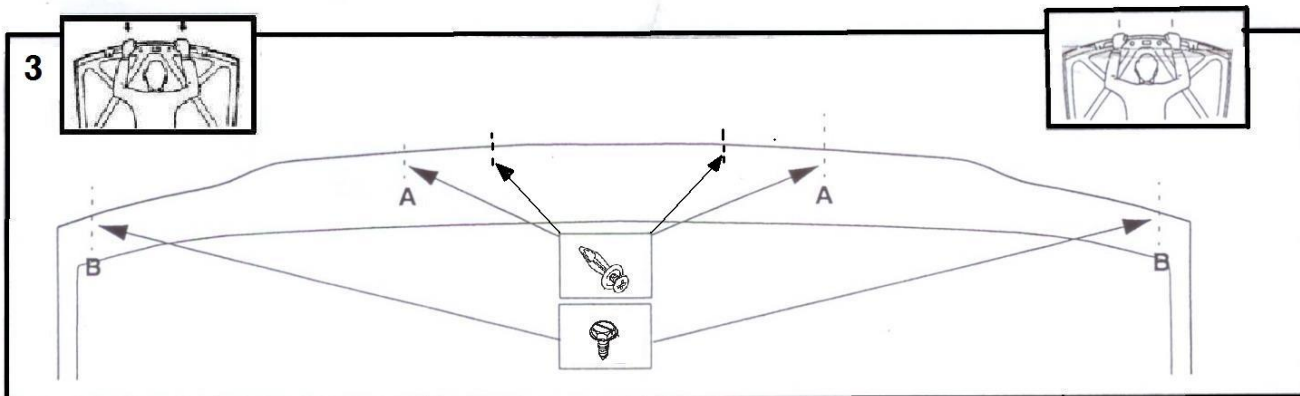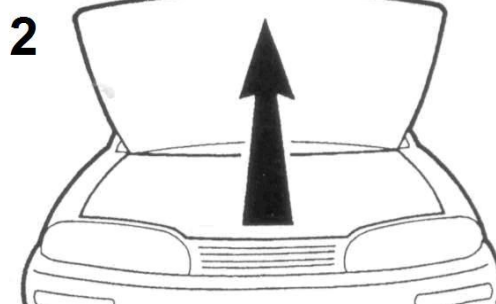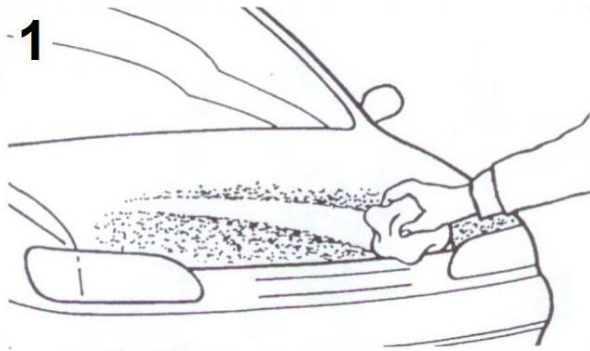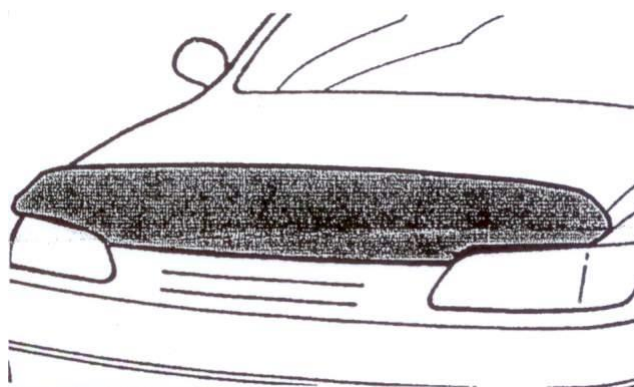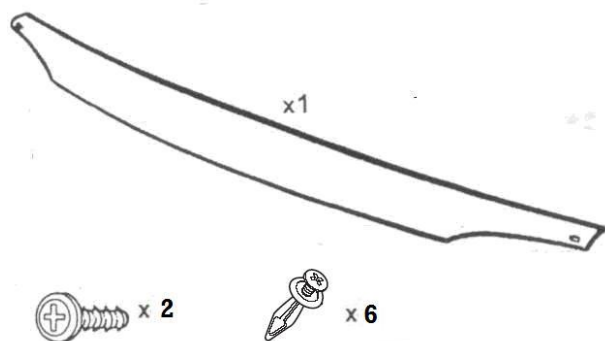

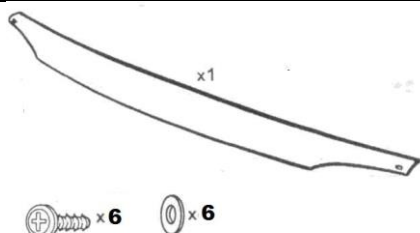

Tool: POWER DRILL WITH 3/32' INCH DRILL BIT
SCEWDRIVER
PENCIL
TAPE MEASURE

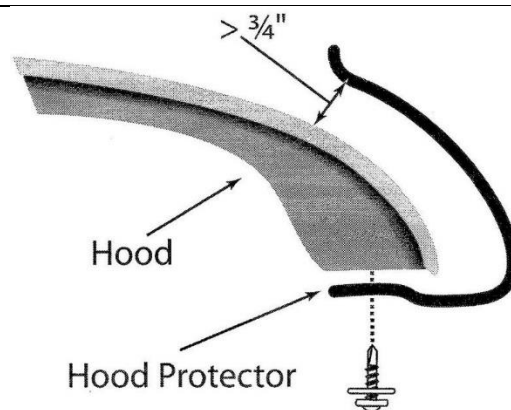

CAUTION!

DO NOT ATTEMPT TO USE POWER TOOLS WHEN INSTALLING YOUR HOOD PROTECTOR

1. Lift the truck hood and hold protector against the underside of hood centered equally from the edges .(Use the center mark on the hood protector as a guide) Important! Make sure there is at least 3/4" clearance between the hood protector and the hood . make the center of each mounting slot of the hood protector with a pencil
2. Remove the hood protector and drill the 3/32" holes at each pencil mark. Take one of the self-tapping screws and start it then remove it from each of the holes(this is to start threads in the holes)
3. Put the hood protector in place again. Place a shoulder washer onto each if the screws and fasten the hood protector to the hood. Tighten just enough to hold the hood protector in place
4. Be sure the hood protector is centered and tighten the screws with a screwdriver until snug. Important! do not over tighten the screws, they will strip the threads if tightened too much!
5. Close the truck hood slowly to make sure there is clearance between the hood protector and the truck grille. if necessary, adjust the hood stops or the hood lock mechanism to allow the thickness of the hood protector.
6. Cleaning your hood protector--use only soapy water and a soft cloth. Never use paper towels, petroleum product, or solvents to clean your hood protector.

PRODUCT CARE

- Periodically check the product to ensure all fasteners are tight and components are intact.
- Regular waxing is recommended to protect the finish of the product.
- **Use ONLY Non-Abrasive automotive wax.** Use of any soap, polish or wax that contains an abrasive is detrimental and Can scratch the finish leading to corrosion.

FAQ's**1. Mounting Bracket are not getting Installed properly.**

In some cases Illustration images shown in Installation manual may not be the exactly same as per actual vehicle images ,also if Driver / Passenger side mounting brackets are very identical in the design, suggest referring Parts Identification guide to avoid fitment issue.

2. Products are thumping / rattling after installation.

Please ensure that all required mounting brackets / hardware's are installed & tighten correctly. Suggest using white lithium / regular grease between the metal to metal contact surfaces.

3. Missing / Excess Hardware.

Recheck hardware count as per the part list.

4. Product not installing properly.


Ensure make model year, cab length and bed size of your vehicle is listed in the application. All installation steps are followed correctly.

Check out these other TrailFX Products!!


www.TrailFX.com



SIDE BAR



HEADACHE RACKS



RUNNING BOARDS



ROCKER GUARDS

Keystone Automotive Operations Inc. (KAO) warrants this product to be free of defects in material and workmanship at the time of purchase by the original retail consumer. KAO disclaims any other warranties, express or implied, including the warranty of fitness for a particular purpose or an intended use. If the product is found to be defective, KAO may replace or repair the product at our option, when the product is returned prepaid, with proof of purchase. Alteration to, improper installation, or misuse of this product voids the warranty. KAO's liability is limited to repair or replacement of products found to be defective, and specifically excludes liability for any incidental or consequential loss or damage.