


Preparation Before Painting / Installation

- A trial fit is recommended to ensure proper positioning and fit.
- Check fit of parts before painting as we will not accept the return of modified or painted parts.
- Wash and dry your vehicle to remove any debris and/or dirt from the installation area.

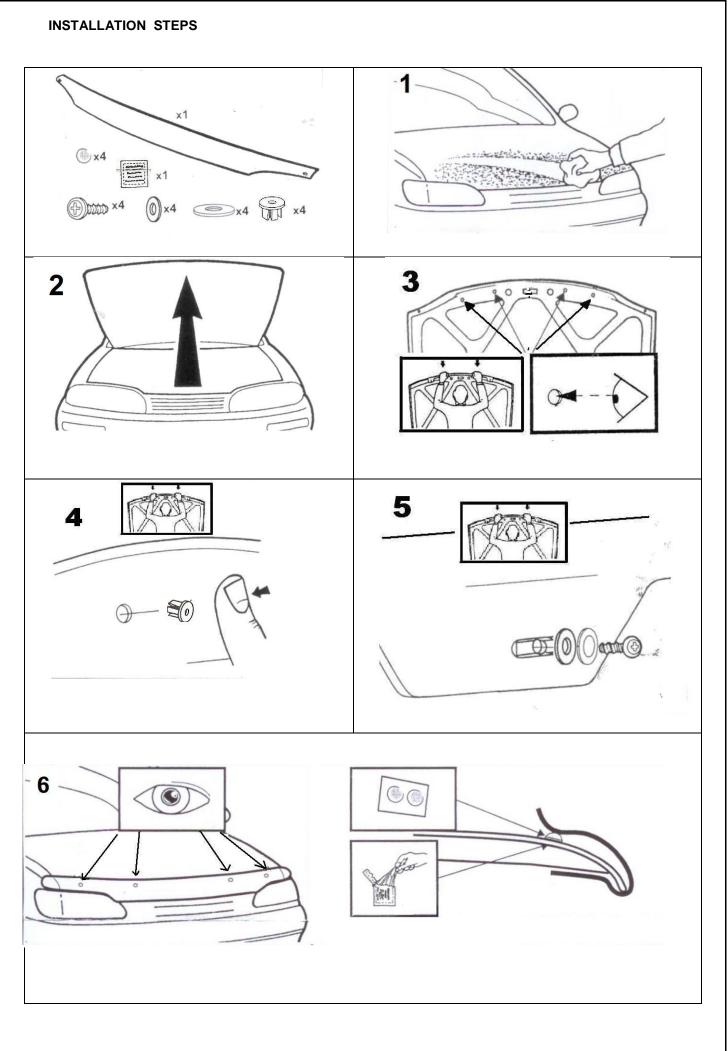

•	Regular waxing is recommended to protect the finish of the product. Use ONLY Non-Abrasive automotive wax. Use of any soap, polish or wax that contains an abrasive is detrimental and Can scratch the finish leading to corrosion.
FA	Q's
1.	Mounting Bracket are not getting Installed properly. In some cases Illustration images shown in Installation manual may not be the exactly same as per actual vehicle images ,also if Driver / Passenger side mounting brackets are very identical in the design, suggest referring Parts Identification guide to avoid fitment issue.
2.	Products are thumping / rattling after installation. Please ensure that all required mounting brackets / hardware's are installed & tighten correctly. Suggest using white lithium / regular grease between the metal to metal contact surfaces.
3.	<i>Missing / Excess Hardware.</i> Recheck hardware count as per the part list.
4.	Product not installing properly. Ensure make model year, cab length and bed size of your vehicle is listed in the application. All installation steps are followed correctly.
Check	out these other TrailFX Products!! www.TrailFX.com
	SIDE BAR HEADACHE RACKS RUNNING BOARDS ROCKER GUARDS
	one Automotive Operations Inc. (KAO) warrants this product to be free of defects in material and workmanship at the time chase by the original retail consumer. KAO disclaims any other warranties, express or implied, including the warranty of

Periodically check the product to ensure all fasteners are tight and components are intact.

PRODUCT CARE