INSTALLATION INSTRUCTIONS



WESTIN®


Nissan Frontier Crew Cab 2022 PART NUMBER: 56-14215, 56-142152

		CON	ITENT	
ITEM	QUANTITY	DESCRIPTION		TOOLS NEEDE
1	2	HDX DROP STEPS		13MM SOCKET
2	2	FRONT MOUNTING BRACKET		13MM WRENCI
3	2	CENTER MOUNTING BRACKET		RATCHET
4	1	REAR DRIVER MOUNTING BRACKET		TORQUE WRENG
5	1	REAR PASSENGER MOUNTING BRACKET		
6	8	M8 HEX NUT		
7	20	M8 FLAT WASHER		
8	20	M8 SPLIT LOCK WASHER		
9	12	M8 HEX HEAD CAP SCREW		
10	4	M8 SERRA		
NTI-SEIZE LI	UBRICANT MUST I	BE USED ON ALL STAINLESS ST	EEL FASTENERS TO PREVE	NT THREAD DAMAGE AND GALL
ITEM 1				(HO)(8)
ITEM 2		ITEM 3	ITEM 4	ITEM 5


PROCEDURE


1


1. Remove contents from box, verify if all parts listed are present and free from damage. Carefully read and understand all instructions before attempting installation. Failure to identify damage before installation could lead to a rejection of any claim.




- 2. Locate the mount locations on the rocker panel of the vehicle.
- 3. Locate (1) Front Mounting Bracket (Item 2) and loosely secure it to the rocker panel using the provided M8 hardware (Items 6 through 8). See **Figure 1 and 2** for reference.
- 4. Repeat **Step 3** for the Center Mounting Bracket (Item 3). See **Figure 3** for reference.

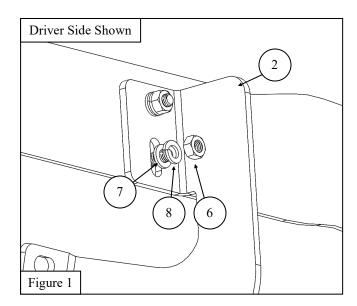

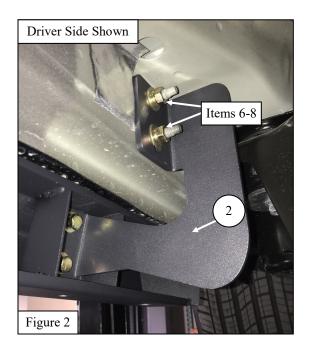


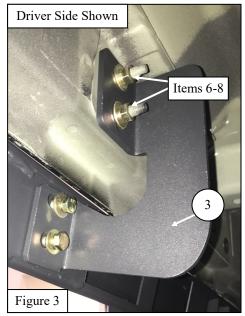


5. Locate the Rear Driver Mounting Bracket (Item 4) and loosely secure it to the rocket panel using the provided M8 Serrated Flange Nut (Item 10). See **Figure 4** for reference. <u>Note:</u> When securing the rear mounting brackets, make sure the upper flange makes contact with the rocker panel in order to provide adequate support.

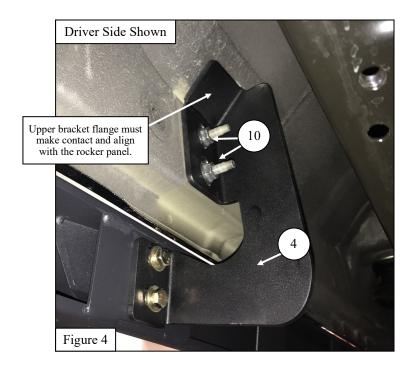

- 6. Locate the driver HDX Drop Step (Item 1) and secure it to the mounting brackets using the supplied M8 hardware (Items 7 through 9), See **Figure 5 and 6** for reference.
- 7. Repeat the previous steps for the Passenger Side.
- 8. Align and adjust the HDX Drop Steps and mounting brackets as needed. Tighten and torque the hardware as specified: M8 hardware to 15-18 ft-lbs.

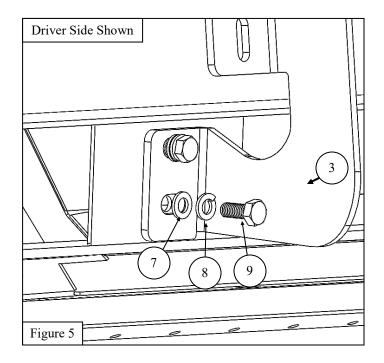

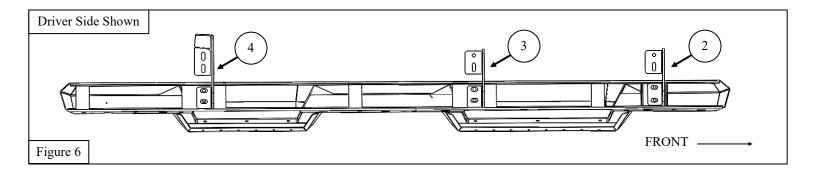


INSTALLATION COMPLETE



CARE INSTRUCTIONS

- REGULAR WAXING IS RECOMMENDED. DO NOT USE ANY TYPE OF POLISH OR WAX THAT MAY CONTAIN ABRASIVES.
- STAINLESS STEEL PRODUCTS CAN BE CLEANED WITH MILD SOAP AND WATER. STAINLESS STEEL POLISH SHOULD BE USED TO POLISH SMALL SCRATCHES.
- GLOSS BLACK FINISHES SHOULD BE CLEANED WITH MILD SOAP AND WATER.







WARNING



Failure to follow these instructions could lead to death, personal injury, and / or property damage.

Failure to follow these instructions could lead to death, personal injury, and / or property damage.

FASTENERS:

All Westin supplied fasteners must be utilized and installed in accordance with the installation instructions and apply torque to the specifications as defined. DOUBLE CHECK ALL FASTENERS BEFORE INITIAL USE, AND PERIODICALLY IN THE FUTURE TO ENSURE PROPER FUNCTION AND SAFETY.

DRILLING:

Most Westin products do not require drilling for installation. If drilling is defined as required, use caution when drilling a vehicle. FAILURE TO REVIEW AN AREA TO BE DRILLED MAY RESULT IN PERSONAL INJURY AND/OR INJURY TO OTHERS AS WELL AS VEHICLE DAMAGE.

EYE PROTECTION:

ALWAYS WEAR SAFETY GLASSES OR GOGGLES DURING THE INSTALLATION PROCESS TO AVOID PERSONAL INJURY.

MAXIMUM TOWING/CARRYING CAPACITY: (if applicable)

The Westin Receiver Hitches will have a visible tow rating label affixed directly on the product. User should never exceed the vehicle manufacturers maximum tow and weight rating regardless of the capacity of the hitch. FAILURE TO FOLLOW THESE GUIDELINES WILL VOID THE WESTIN WARRANTY AND MAY RESULT IN PERSONAL INJURY AND/OR INJURY TO OTHERS AS WELL AS VEHICLE DAMAGE.

FOR CALIFORNIA RESIDENTS ONLY-PROP 65 WARNING:

Some products may contain chemicals such as DEHP, which can cause cancer, birth defects or other reproductive harm. For more info go to www.p65warnings.ca.gov