



Performance Silicone Air Intake Kit

Part Number: 57-1596

2016-2024 Honda Civic 2.0L NA

Installation Instructions

For technical inquiries please email us at tech@hpsperformanceproducts.com

In the email, please include the following information for faster response:

- Year / Make / Model / Engine of your vehicle.
- If it is a fitment issue, please include pictures showing the fitment problem.
- If there are missing parts, please list the part number(s) from the bill of materials on the 2nd page.
- Optional but recommended – Your contact phone number and preferred call back time.

You can also give us a call via 626-747-9200 for tech support Monday-Friday, 9:00am-5:00pm Pacific Time.

Bill of Materials

Part Number: 57-1596

Line	Description	Part Number	Qty
1	Silicone Tube	57-1596	1
2	T-Bolt Clamp	SSTC-70-78	1
3	T-Bolt Clamp	SSTC-79-87	1

- Before installing any parts of this intake system, please read the instructions thoroughly.
- Verify the contents of this intake kit before disassembling your vehicle.
- DO NOT INSTALL IF ANY PARTS ARE MISSING OR DAMAGED. CONTACT tech@hpsperformanceproducts.com IMMEDIATELY. WE ARE NOT RESPONSIBLE FOR ANY DAMAGE CAUSED DUE TO IMPROPER INSTALLATION.
- Installation requires moderate mechanical skills. A qualified mechanic is highly recommended.
- Do not attempt to install the intake system while the engine is hot.
- This installation may require removal of coolant lines that may be hot.
- For technical inquiries, please e-mail us at tech@hpsperformanceproducts.com

PLEASE READ CAREFULLY BEFORE INSTALLATION!


This installation is not for the novice customer. Install this system with **EXTREME** caution! Misuse of this product can destroy your engine! If you are not well versed in the installation of intakes and if you are not mechanically inclined, please have a tuner shop install this kit.

NOTE: HPS holds no responsibility for any engine damage that results from misuse of this product.


GETTING STARTED

1. Turn the ignition OFF and disconnect the vehicle's negative battery cable. If the engine has run within the past two hours let it cool down.


NOTE: Disconnecting the negative battery cable erases pre-programmed electronic memories. Write down all memory settings before disconnecting the negative battery cable. Some radios will require an anti-theft code to be entered after the battery is reconnected. The anti-theft code is typically supplied with your owner's manual. In the event your vehicles' anti-theft code cannot be recovered, contact an authorized dealership to obtain your vehicles anti-theft code. We also highly recommend NOT discarding any stock parts after the installation.

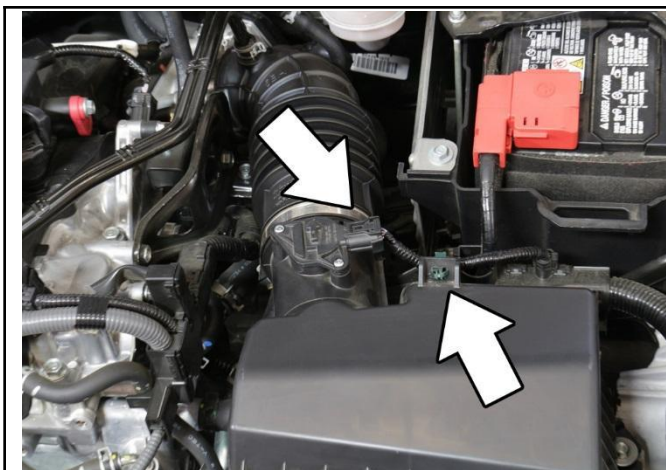


2. Disconnect the MAF sensor electrical connection and unclip the harness from the air box.

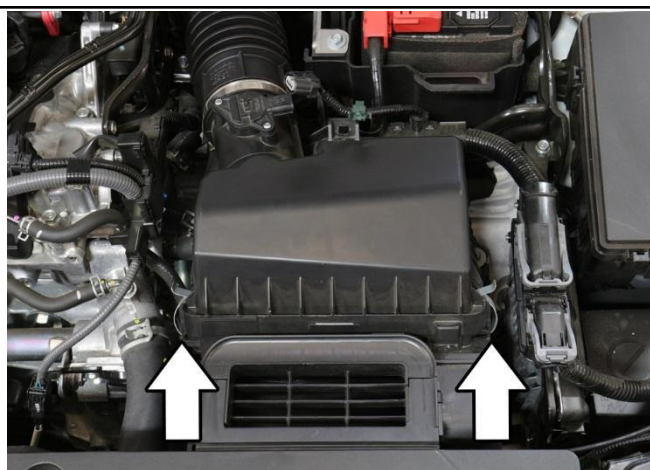

3. Unclip the retaining clips holding the top portion of the air box.

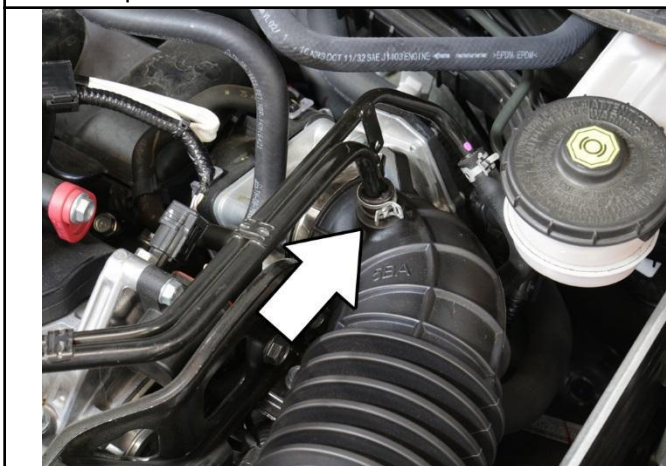

4. Disconnect the breather pipe from the intake tube.

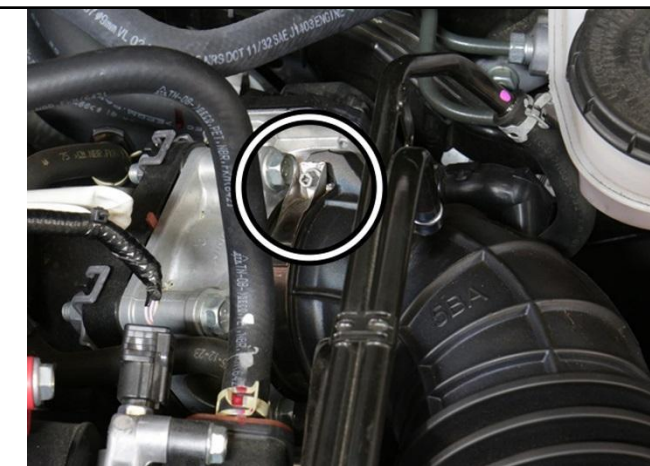


5. Loosen the hose clamp on the throttle body.



6. Remove the top portion of the air box along with the intake tube from the vehicle.




7. Remove the stock intake tube from the air box. Loosely install the T-bolt clamps onto the HPS intake hose, then insert it onto the stock air box.

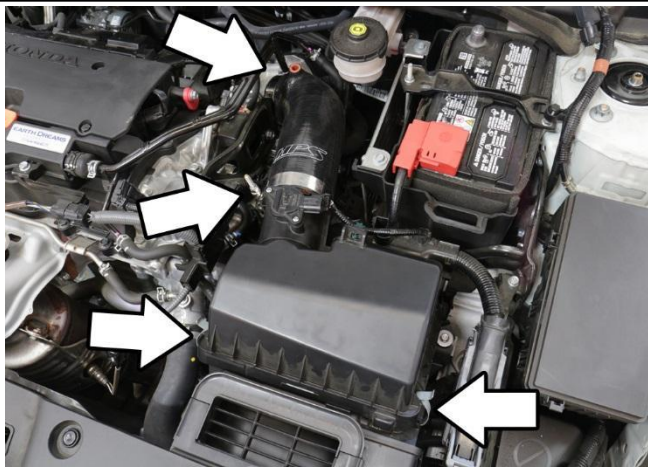

8. Insert the HPS silicone intake onto the throttle body and adjust the hose to the proper placement. Clip on the retaining clips securing the air box when the intake hose has been adjusted. Tighten the T-bolt clamps. **DO NOT EXCEED 15 INCH LBS.**



9. Insert the breather tube into the silicone intake.

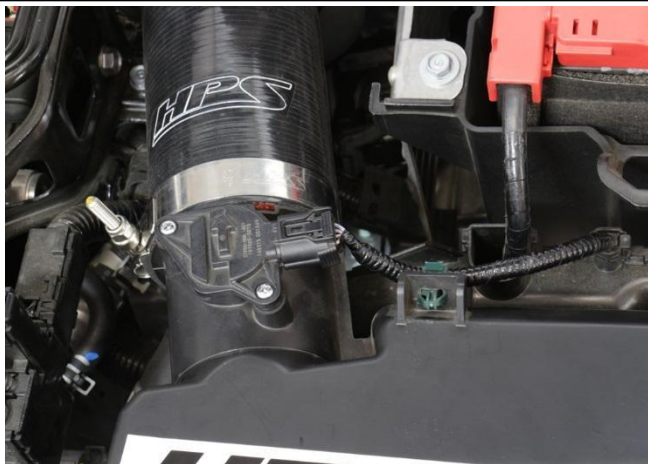

10. Reconnect the MAF harness clip and plug in the MAF harness connector back into the sensor.


Final Steps

Once the intake has been positioned, tighten all of the clamps and secure all of the parts.

Upon completion of the installation, reconnect the negative battery terminal before you start the engine. Double check to make sure everything is tight and properly positioned before starting the vehicle.

Start the engine. Let the car idle for 3 minutes. Perform a final inspection before driving. Listen carefully for any odd noises, rattles and/or air leaks prior to taking it for a test drive. If any problems arise go back and check the vacuum lines, hoses and clamps that may be causing leaks or rattles and correct the problem.

Periodically, recheck the alignment of the intake system and make sure there is proper clearance around and along the length of the intake. Failure to follow proper maintenance procedures may cause damage to the intake and will void the warranty.

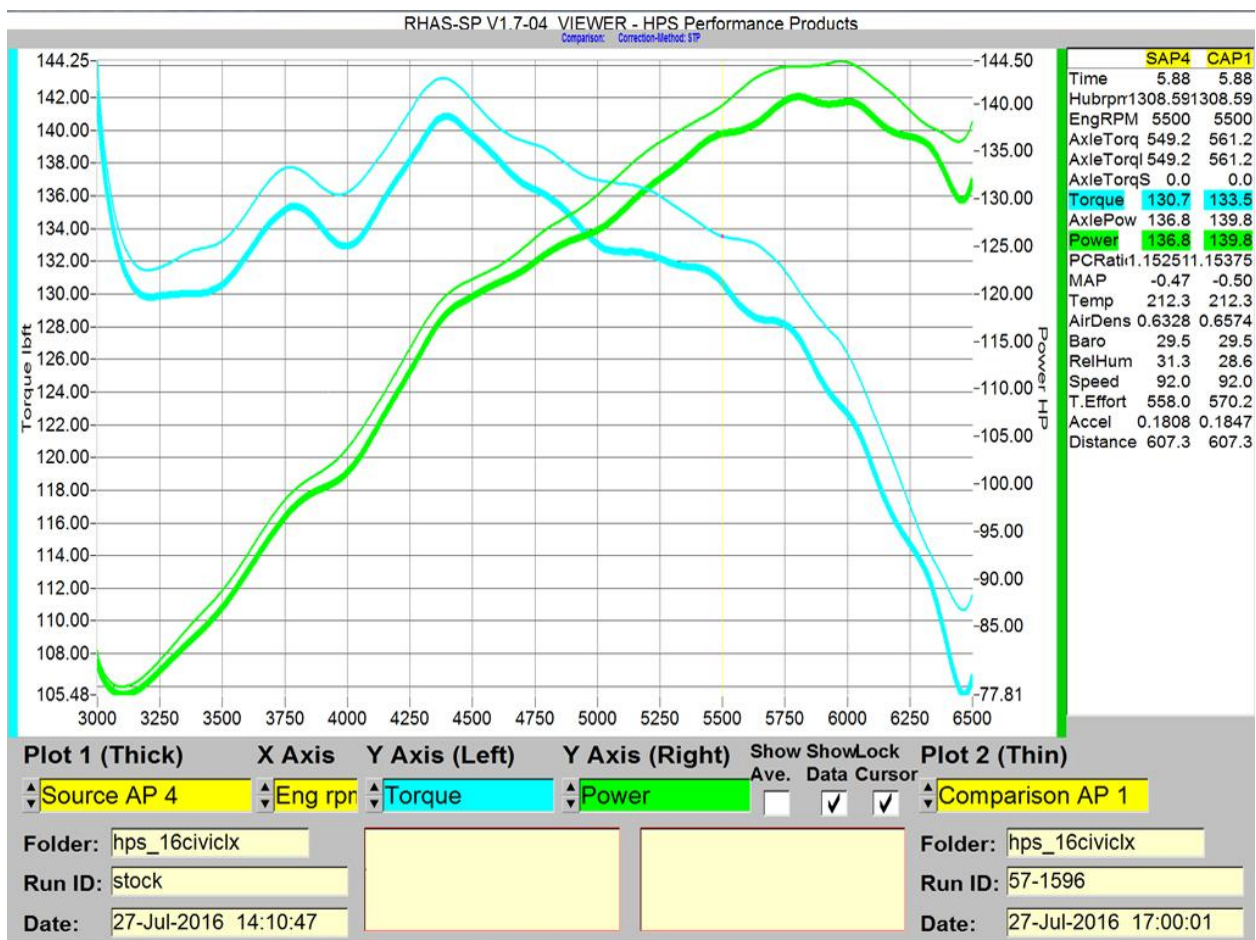

Also available for 2016-2024 Honda Civic



HPS Magnetic Drain Plug
[Part Number MDP-M14x150](#)

Contact an authorized HPS Performance dealer or
visit us at [hpsperformanceproducts.com](https://www.hpsperformanceproducts.com) for more details