



JEEP JL FOG LIGHT KIT

Installation Instructions & User's Manual



*CG2 Mini Cannon Shown, Actual Lights Used my vary



VISION X



About The Jeep JL Fog Light Kit:









FEATURES

- 1. Lightweight hybrid housing.
- 2. High Output Cree LEDs.
- 3. Integrated electronic thermal management (ETM).

VISION X LIGHTS SPECIFICATION

Warranty : Extended
Input Voltage : 9-32V DC
LED Lifespan : 50,000 Hours

PREPARATION

- 1. We recommend completely reading instructions before installing.
- 2. Consult your local state regulatory agency regarding the use of LED lighting.
- 3. The placement of LED lighting should not restrict airflow to the radiator, or block head lamps, turn signals, or parking lights.


JEEP JL FOG LIGHT KIT



WARNING: Bolts, Nuts, and Washers are Stainless Steel. <u>DO NOT USE</u> Pneumatic or Electric Tools to Tighten and Loosen. The <u>Hardware Will Permanently Lock Together</u>.

MOUNTING INSTRUCTION

1. Remove Trunnion Bracket that comes on the light by removing both side 5mm Hex Head Bolts.



 Using the same Hardware, Attach Jeep JL Brackets to side of the light with 5mm Allen Key. Note that the brackets are mirrored so the long horizontal bracket (A.) will be pointed towards the outside of the vehicle and the vertical bracket (B.) will be closer to the center of the vehicle on each light. (See Figure Below.)




- 3. Using the same mounting screws from the stock fog lights, mount the Vision X Lights with attached brackets to the bumper.
- 4. To adjust seating depth or light angle, loosen the 5mm side bolts on the light and adjust accordingly.



WIRING INSTALLATION INSTRUCTION

1. Supplied with the Jeep JL Fog Light Kit Deutsch to H16 Adapter that allows for easy plug and play solution into your existing fog light wiring.

WIRING DIAGRAM

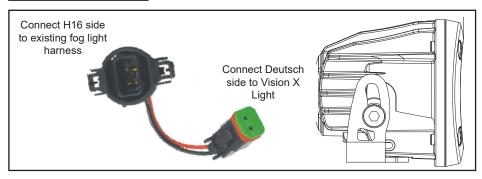

DIMMER WIRE OPTIONAL:

Do Not connect without authorized accessories.

DIMMING FUNCTION

Your light is capable of dimming through the Prime Drive wire on the light's plug. To achieve this requires our authorized accessories, the XIL-PDIMMER, or XIL-PDIMMERBUTTON. **Do Not** connect the Prime Drive wire without authorized accessories as this will damage the electronics.

